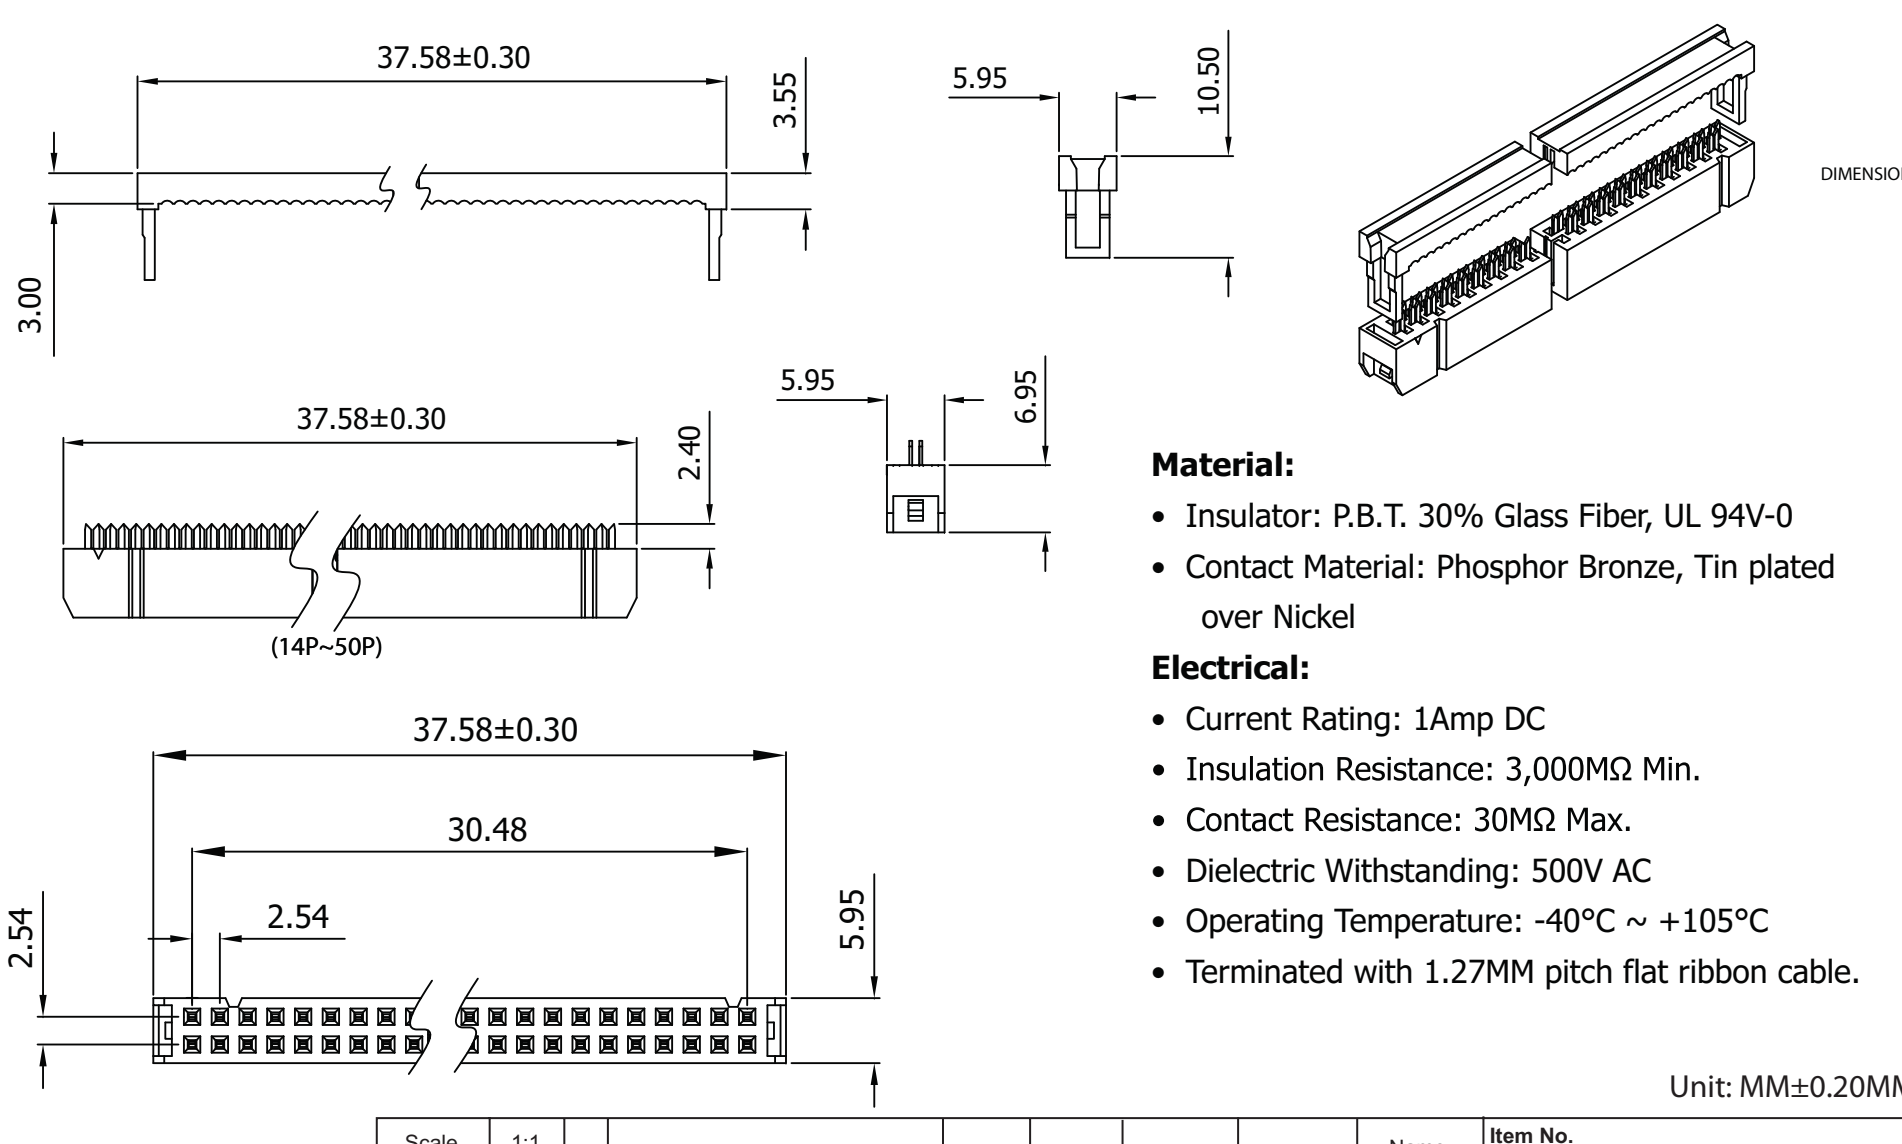


	1	2	3	4	5	6	7													
A	 37.58±0.30 3.55 5.95 10.50 3.00 37.58±0.30 2.40 5.95 6.95 (14P~50P) 37.58±0.30 30.48 2.54 5.95 2.54 Unit: MM±0.20MM <table><tr><td>Scale</td><td>1:1</td></tr><tr><td>TOLERANCE</td><td></td></tr><tr><td>X.X</td><td>±0.40</td></tr><tr><td>X.XX</td><td>±0.25</td></tr><tr><td>X.XXX</td><td>±0.15</td></tr><tr><td>Angle</td><td>±3°</td></tr></table> RoHS Complaint ASSMANN components AWP26-8540-T-R Title IDC-Socket - 2.54MM Pitch, Tin Plated, w/o Central Lug, w/o Strain Relief, 26 Contacts Drawing No. rev00 Replace Sheet							Scale	1:1	TOLERANCE		X.X	±0.40	X.XX	±0.25	X.XXX	±0.15	Angle	±3°	A
Scale								1:1												
TOLERANCE																				
X.X								±0.40												
X.XX								±0.25												
X.XXX								±0.15												
Angle	±3°																			
B	B																			
C	C																			
D	D																			
E	E																			
F	F																			
G								G												
H								H												
	1	2	3	4	5	6	7													

Scale	1:1							Name
TOLERANCE						Drawn	10.19.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

Item No.	
AWP26-8540-T-R	
Title IDC-Socket - 2.54MM Pitch, Tin Plated, w/o Central Lug, w/o Strain Relief, 26 Contacts	
Drawing No.	rev00
Replace	Sheet