


	1	2	3	4	5	6	7																																																																															
A	 80.74±0.30 3.00 3.55 5.95 10.50 80.74±0.30 2.40 (14P~50P) 80.74±0.30 73.66 2.54 5.95 Material: • Insulator: P.B.T. 30% Glass Fiber, UL 94V-0 • Contact Material: Phosphor Bronze, Tin plated over Nickel Electrical: • Current Rating: 1Amp DC • Insulation Resistance: 3,000MΩ Min. • Contact Resistance: 30MΩ Max. • Dielectric Withstanding: 500V AC • Operating Temperature: -40°C ~ +105°C • Terminated with 1.27MM pitch flat ribbon cable. Unit: MM±0.20MM							A																																																																														
B								B																																																																														
C								C																																																																														
D								D																																																																														
E								E																																																																														
F								F																																																																														
G	<table><tr><td>Scale</td><td>1:1</td><td></td><td></td><td></td><td></td><td></td><td>Name</td><td>Item No.</td></tr><tr><td colspan="2">TOLERANCE</td><td></td><td></td><td></td><td></td><td>Drawn</td><td>10.19.11</td><td>Chappell</td></tr><tr><td>X.X</td><td>±0.40</td><td></td><td></td><td></td><td></td><td>Approved</td><td></td><td></td></tr><tr><td>X.XX</td><td>±0.25</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.XXX</td><td>±0.15</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Angle</td><td>±3°</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td colspan="7" rowspan="2">  </td><td colspan="2">Drawing No.</td><td rowspan="2">rev00</td></tr><tr><td colspan="2">Replace</td></tr><tr><td colspan="7">Modification</td><td>Date</td><td>Name</td><td colspan="2">  </td><td>Sheet</td></tr></table>							Scale	1:1						Name	Item No.	TOLERANCE						Drawn	10.19.11	Chappell	X.X	±0.40					Approved			X.XX	±0.25								X.XXX	±0.15								Angle	±3°															Drawing No.		rev00	Replace		Modification							Date	Name			Sheet	G
Scale	1:1						Name	Item No.																																																																														
TOLERANCE						Drawn	10.19.11	Chappell																																																																														
X.X	±0.40					Approved																																																																																
X.XX	±0.25																																																																																					
X.XXX	±0.15																																																																																					
Angle	±3°																																																																																					
							Drawing No.		rev00																																																																													
							Replace																																																																															
Modification							Date	Name			Sheet																																																																											
H								H																																																																														
	1	2	3	4	5	6	7																																																																															

Scale	1:1							Name
TOLERANCE						Drawn	10.19.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

Item No.	
AWP60-8540-T-R	
Title IDC-Socket - 2.54MM Pitch, Tin Plated, w/o Central Lug, w/o Strain Relief, 60 Contacts	
Drawing No.	rev00
Replace	Sheet

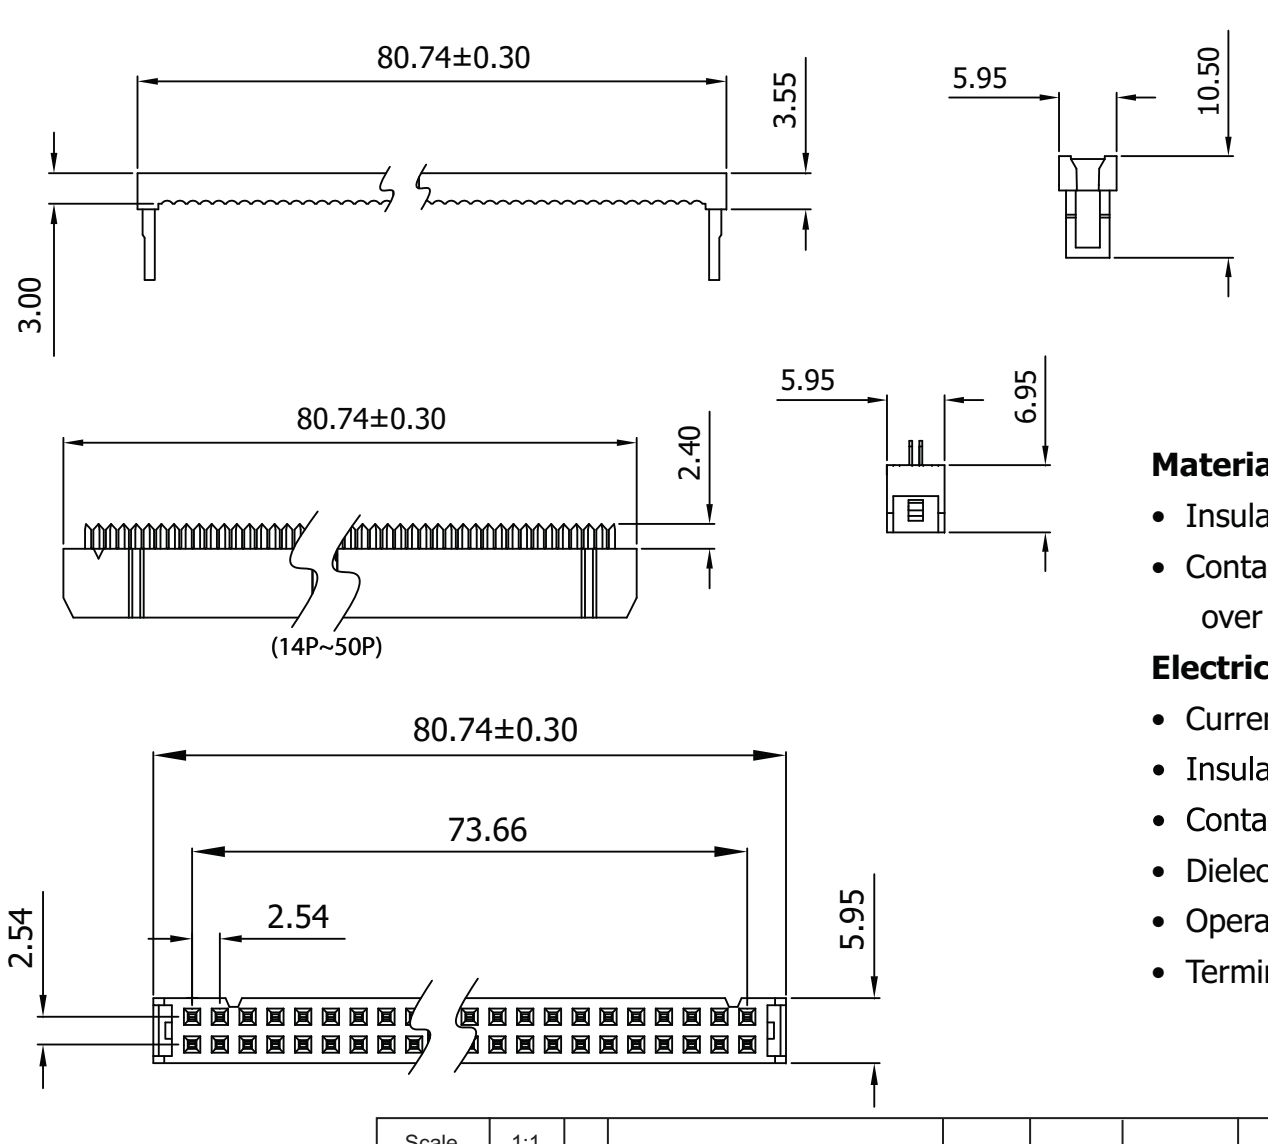