

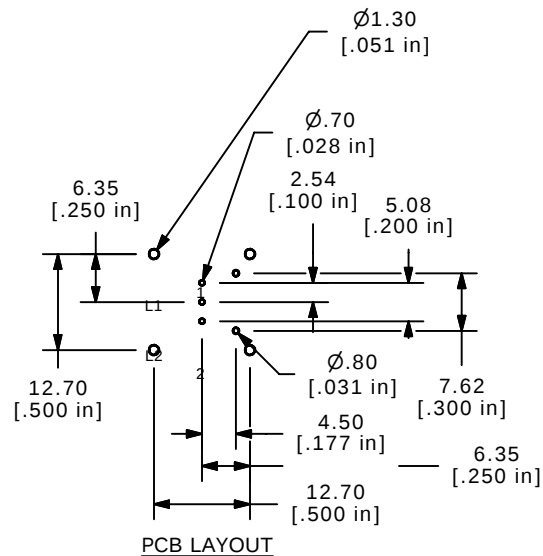


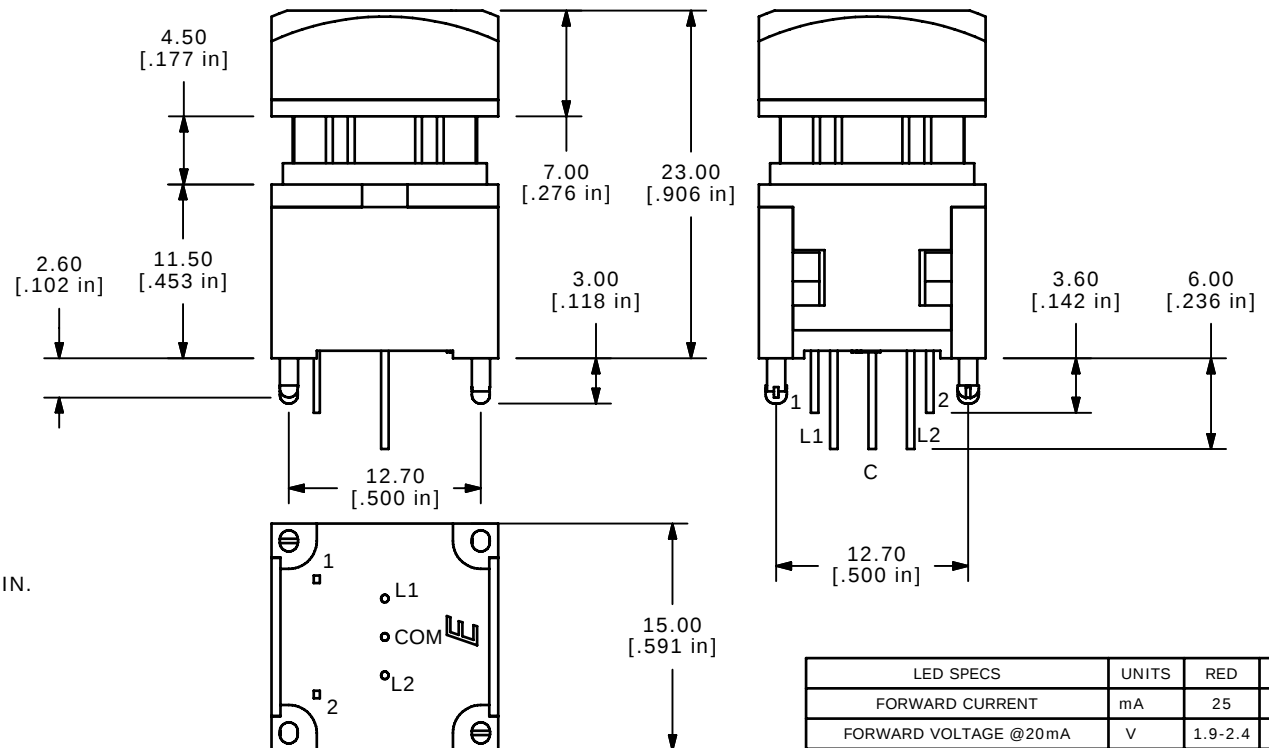


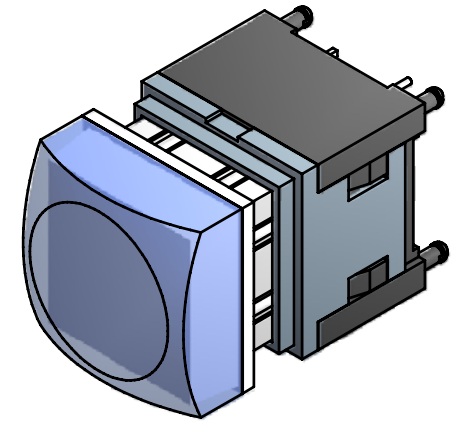

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERM. NOS. FOR REFERENCE ONLY.
- RATING: 12VDC, 100mA
- CONTACT MATERIAL: SILVER
- CONTACT RESISTANCE: 200 MILLI-OHM MAX.
- INSULATION RESISTANCE: 500VDC, 100 MEGA-OHM MIN.
- ▲ OPERATING FORCE: 250±100GF
- MECHANICAL LIFE: 1,000,000 CYCLES
- OPERATING TEMP: -20°C TO +70°C
- LED COLORS: RED-GREEN
- TRAVEL: 4.50mm±0.20
- 2002/95/EC (ROHS) COMPLIANT
- ▲ DENOTES CRITICAL PARAMETER.

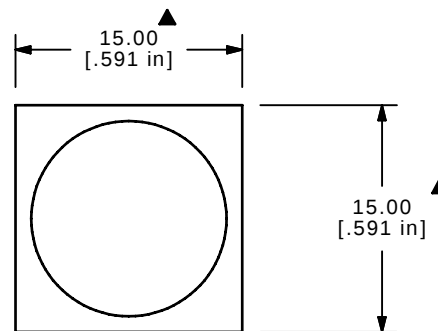

LED SPECS	UNITS	RED	GREEN
FORWARD CURRENT	mA	25	25
FORWARD VOLTAGE @20mA	V	1.9-2.4	2.0-2.4
LUMINOUS INTENSITY @ 10mA	MCD	40	250

B	19357	UPDATE HOUSING, COVER, PLUNGER	11/08/10	BMA
A	18207	New Release	8/12/08	rc
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE LP110A1NBSRG

SCALE 2

DATE 4/29/2008

DR rc

DWG B230003

REV B