


NOTES:

- ▲ 8. OPERATING FORCE: 250 ± 100GF
- 9. MECHANICAL LIFE: 1,000,000 CYCLES
- 10. OPERATING TEMP: -20°C TO +70°C
- 11. LED COLORS: BLUE - WHITE
- 12. TRAVEL: 4.50mm±0.20
- 13. 2002/95/EC (ROHS) COMPLIANT
- 14. ▲ DENOTES CRITICAL PARAMETER.

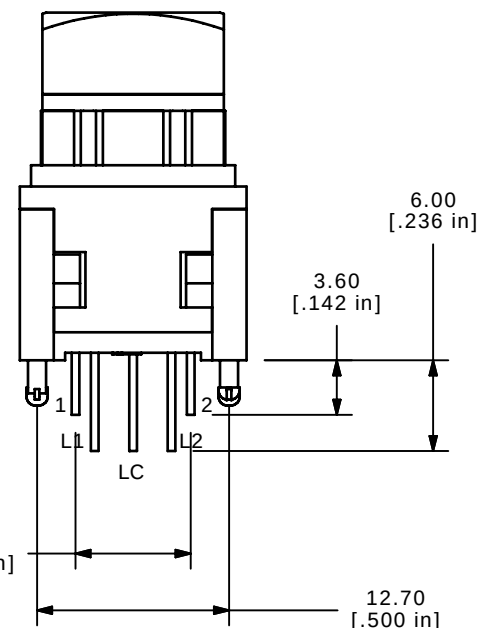

LED SPECS	UNITS	BLUE	WHITE
FORWARD CURRENT	mA	20	20
FORWARD VOLTAGE @20mA	V	3.3-3.8	3.0-3.6
LUMINOUS INTENSITY @ 20mA	mcd	70	500

B	19357	UPDATE HOUSING, COVER, PLUNGER	11/08/10	BMA
A	18750	Release for Production	1/29/10	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE LP11OA1NASBW

SCALE 2

DATE 1/29/2010

DR	
BLR	

DWG
B230010

REV
B