

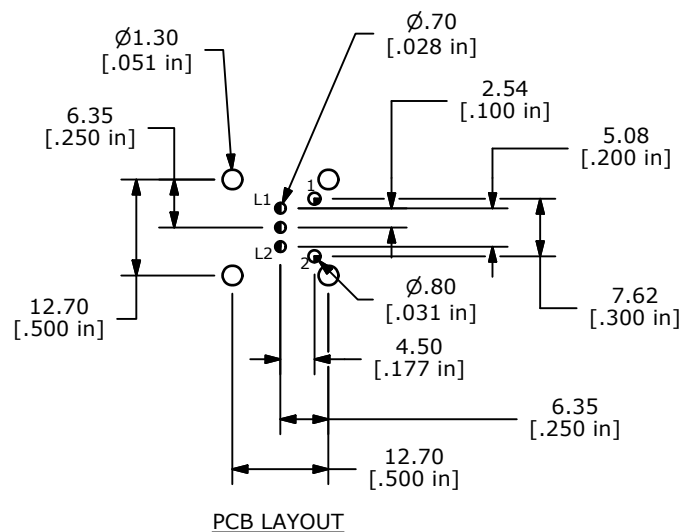


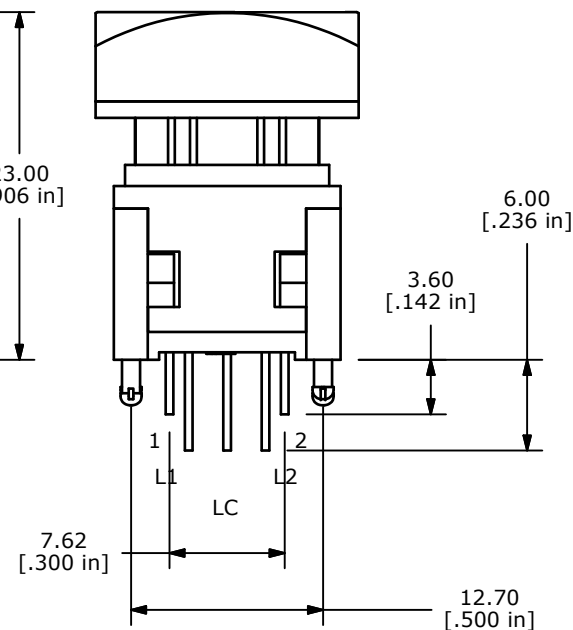
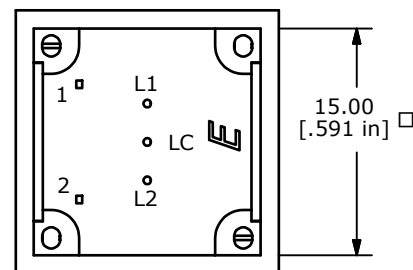
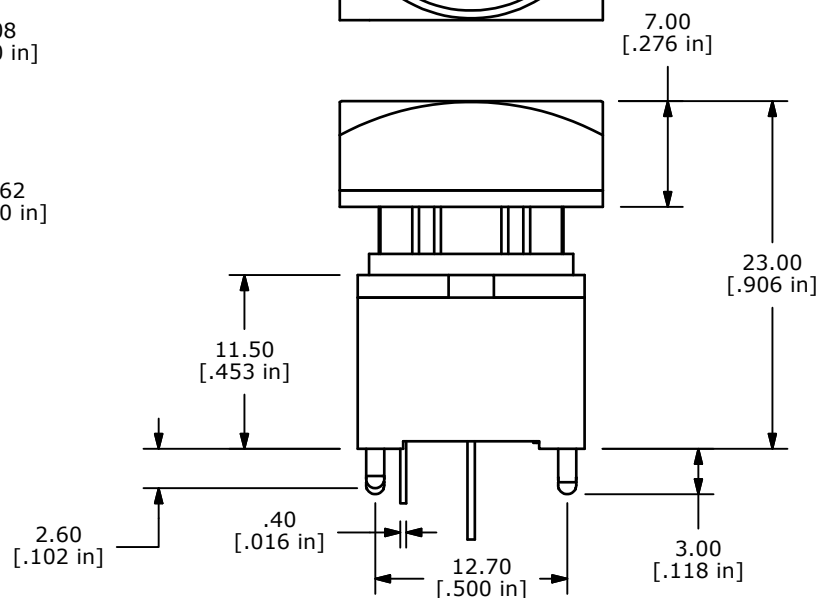


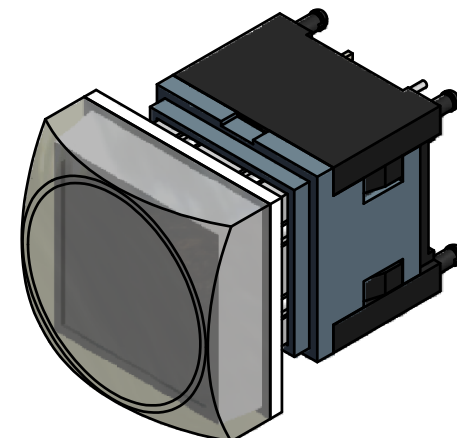

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: $X.X=\pm 0.4$
 $X.XX=\pm 0.25$
 3. TERM. NOS. FOR REFERENCE ONLY.
 4. RATING: 100mA @ 12VDC
 5. CONTACT MATERIAL: SILVER
 6. CONTACT RESISTANCE: 200 Milli-OHM MAX.
 7. INSULATION RESISTANCE: 500VDC, 100 MEGA-OHM MIN.
 - ▲ 8. OPERATING FORCE: 250 ± 100 GF
 9. MECHANICAL LIFE: 1,000,000 CYCLES
 10. OPERATING TEMP: -20°C TO +70°C
 11. LED COLORS: BLUE - WHITE
 12. TRAVEL: $4.50\text{mm} \pm 0.20$
 13. 2002/95/EC (ROHS) COMPLIANT
 14. ▲ DENOTES CRITICAL PARAMETER.

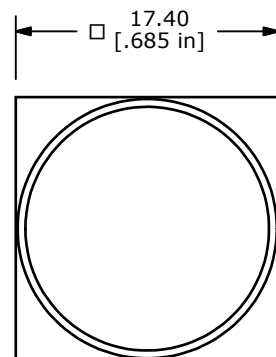

LED SPECS	UNITS	BLUE	WHITE
FORWARD CURRENT	mA	20	20
FORWARD VOLTAGE @20mA	V	3.3-3.8	3.0-3.6
LUMINOUS INTENSITY @ 20mA	mcd	70	500

C	19499	CORRECT TITLE WAS LP110A1NBSBW	12/03/10	BMA
B	19357	UPDATE HOUSING, COVER, PLUNGER	11/08/10	BMA
A	18750	Release for Production	1/29/10	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE LP110A1NCSBW

SCALE 2

DATE 1/29/2010

DR	
BLR	

DWG	B230012
-----	---------

REV
C