






NOTES:

- ▲ 8. OPERATING FORCE: 250 ± 100gf
9. MECHANICAL LIFE: 1,000,000 CYCLES
10. OPERATING TEMP: -20°C to +70°C
11. LED COLORS: YELLOW-GREEN
12. TRAVEL: 4.50mm ± 0.20
13. 2002/95/EC (ROHS) COMPLIANT
14. ▲ DENOTES CRITICAL PARAMETER.

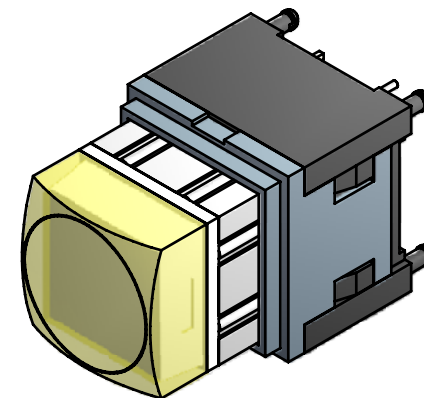

LED SPECS	UNITS	YELLOW	GREEN
FORWARD CURRENT	mA	20	25
FORWARD VOLTAGE @20mA	V	2.05-2.4	3.1-3.4
LUMINOUS INTENSITY @ 20mA	MCD	70	250



B	19357	UPDATE HOUSING, COVER, PLUNGER	11/08/10	BMA
A	18399	Release for Production	2/16/09	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

 E-SWITCH® 				
TITLE LP110A1NASYG				
SCALE 2	DATE 2/16/2009	DR BLR	DWG B231009	REV B