

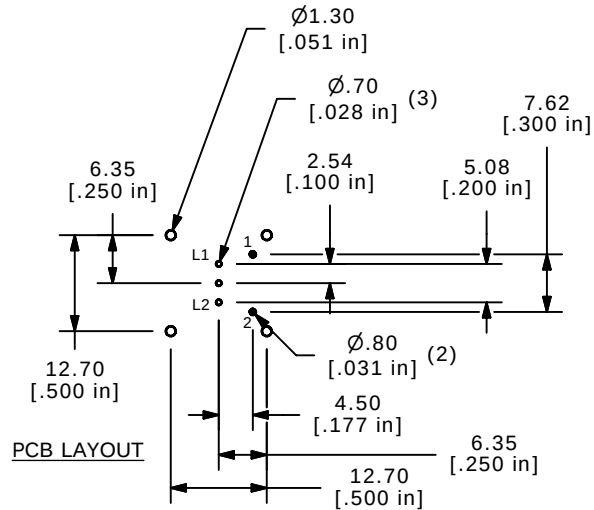
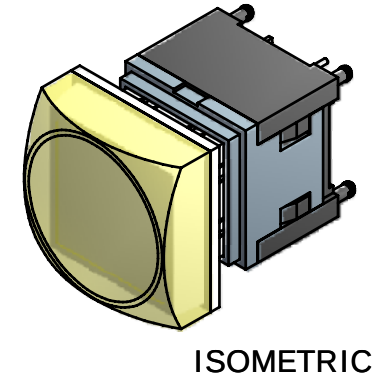


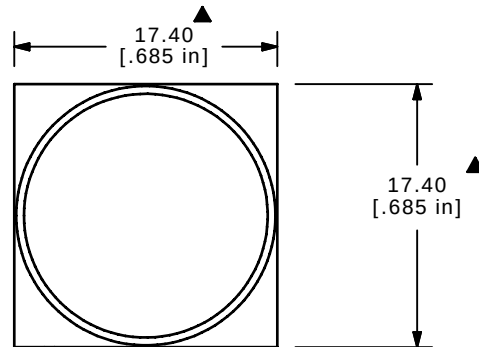

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X \pm 0.4$
 $X.XX \pm 0.25$
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 12VDC, 100mA
5. CONTACT MATERIAL: SILVER
6. CONTACT RESISTANCE: 200 MILLI-OHM MAX.
7. INSULATION RESISTANCE: 500VDC, 100 MEGA-OHM MIN.
8. OPERATING FORCE: 250 ± 100 GF
9. MECHANICAL LIFE: 1,000,000 CYCLES
10. OPERATING TEMP: -20°C TO $+70^{\circ}\text{C}$
11. LED COLORS: YELLOW-YELLOW
12. TRAVEL: $4.50\text{mm} \pm 0.20$
13. 2002/95/EC (ROHS) COMPLIANT
14. ▲ DENOTES CRITICAL PARAMETER.
15. SWITCH HAS TACTILE FEEDBACK WHEN ACTUATED.

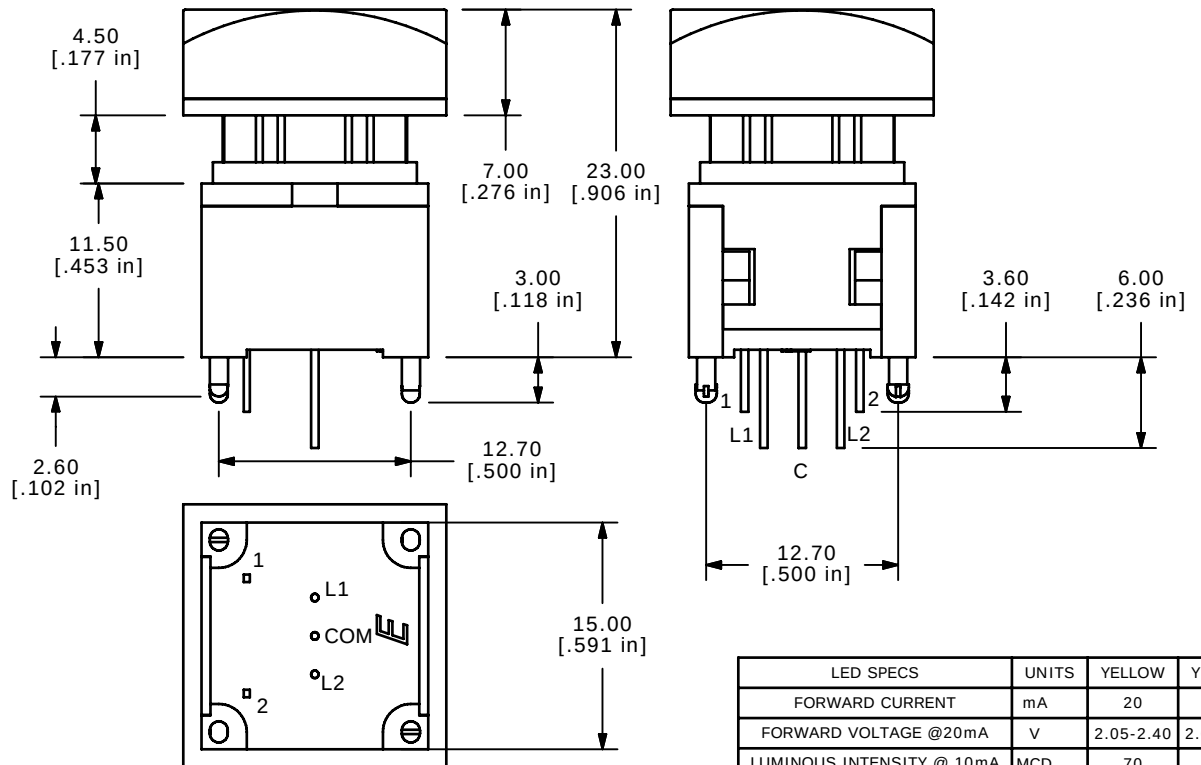

LED SPECS	UNITS	YELLOW	YELLOW
FORWARD CURRENT	mA	20	20
FORWARD VOLTAGE @20mA	V	2.05-2.40	2.05-2.40
LUMINOUS INTENSITY @ 10mA	MCD	70	70



E-SWITCH®



TITLE LP11OA1TCSYY

SCALE 2 : 1

DATE 3/9/2010

DR	BLR
----	-----

DWG B231010

REV
B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED