

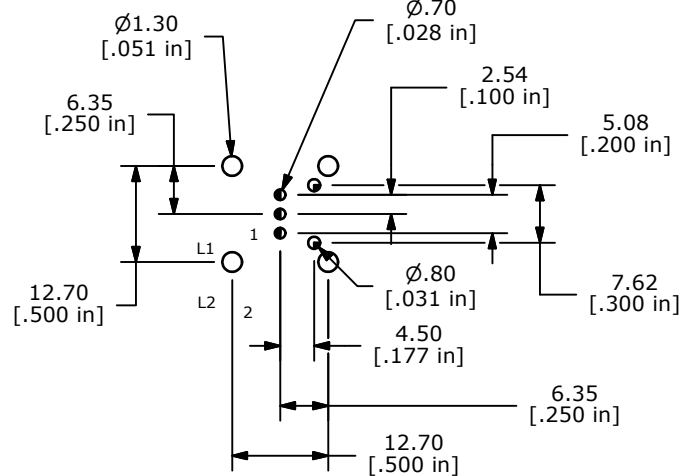


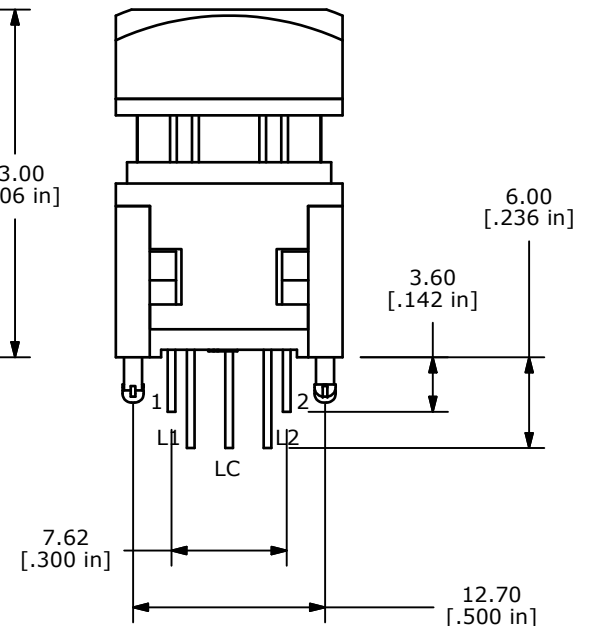
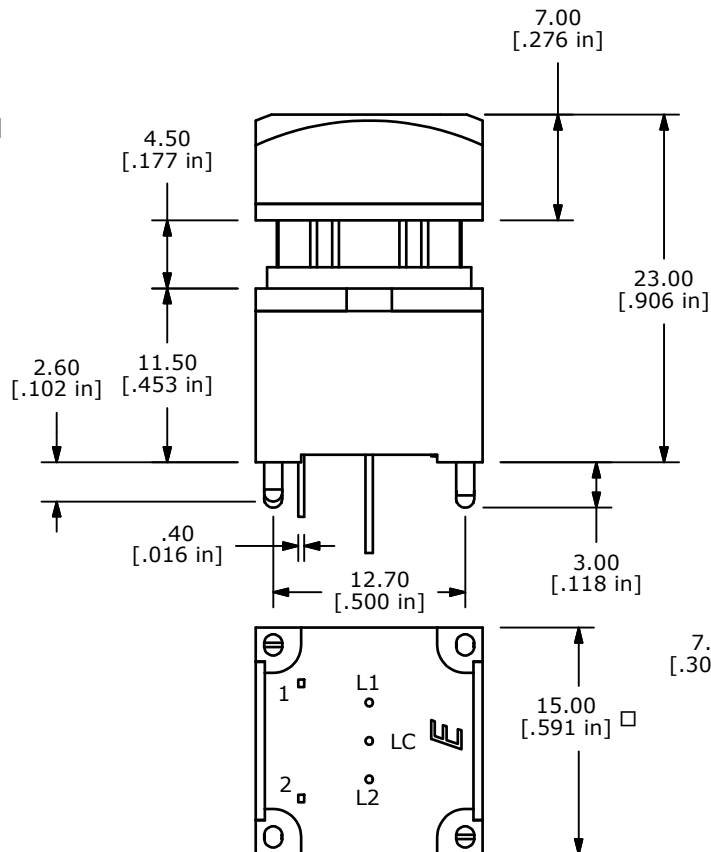


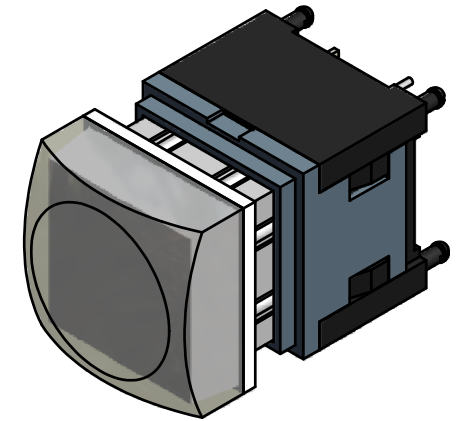

PCB LAYOUT



LED SPECS	UNITS	WHITE	WHITE
FORWARD CURRENT	mA	20	20
FORWARD VOLTAGE @20mA	V	3.0-3.6	3.0-3.6
LUMINOUS INTENSITY @ 20mA	mcd	500	500

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X \pm 0.4$
 $X.XX \pm 0.25$
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 100mA @ 12VDC
5. CONTACT MATERIAL: SILVER
6. CONTACT RESISTANCE: 200 Milli-OHM MAX.
7. INSULATION RESISTANCE: 500VDC, 100 MEGA-OHM MIN.
- ▲ 8. OPERATING FORCE: 250 ± 100 GF
9. MECHANICAL LIFE: 1,000,000 CYCLES
10. OPERATING TEMP: -20°C TO +70°C
11. LED COLORS: WHITE - WHITE
12. TRAVEL: $4.50\text{mm} \pm 0.20$
13. 2002/95/EC (ROHS) COMPLIANT
14. ▲ DENOTES CRITICAL PARAMETER.



E-SWITCH®



LAME
INDUSTRIES

A	19491	Release for Production	12/02/10	BMA
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE LP11OA1NBSWW

SCALE 2

DATE	12/3/2010
------	-----------

DR	BMA
----	-----

DWG	B231011
-----	---------

REV
A