
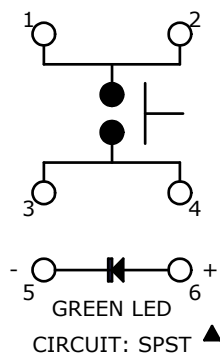


LED SPECS	UNITS	GREEN ▲
FORWARD CURRENT	mA	20
FORWARD VOLTAGE @20mA	V	2.1-2.5
LUMINOUS INTENSITY @ 20mA	MCD	400

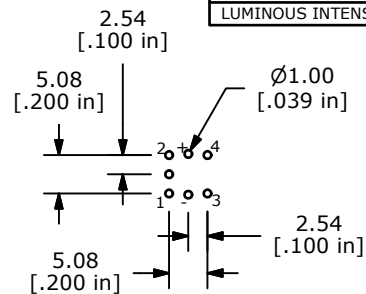

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. RATING: 12VDC @ 50mA
4. CONTACT RESISTANCE: 100mΩ MAX.
5. INSULATION RESISTANCE: 100MΩ MIN.
- ▲ 6. OPERATING FORCE: 180± 50gf
7. TRAVEL: 0.2± 0.1mm
8. OPERATING TEMPERATURE: -20°C TO 70°C
9. OPERATING LIFE: 500,000 CYCLES
- ▲ 10. LED: GREEN
11. ▲ DENOTES CRITICAL PARAMETERS
12. 2002/95/EC (ROHS) COMPLIANT
13. PARTS TO BE PACKAGED 100 PARTS PER TRAY.

NOTE THE GRAPHICS
RELATIONSHIP TO
LED TERMINALS



TRANSLUCENT
GRAPHICS TO
SEE LED

MARK TO SHOW
LED CATHODE

BLACK
HOUSING

SILVER
BUTTON

BLACK
BEZEL

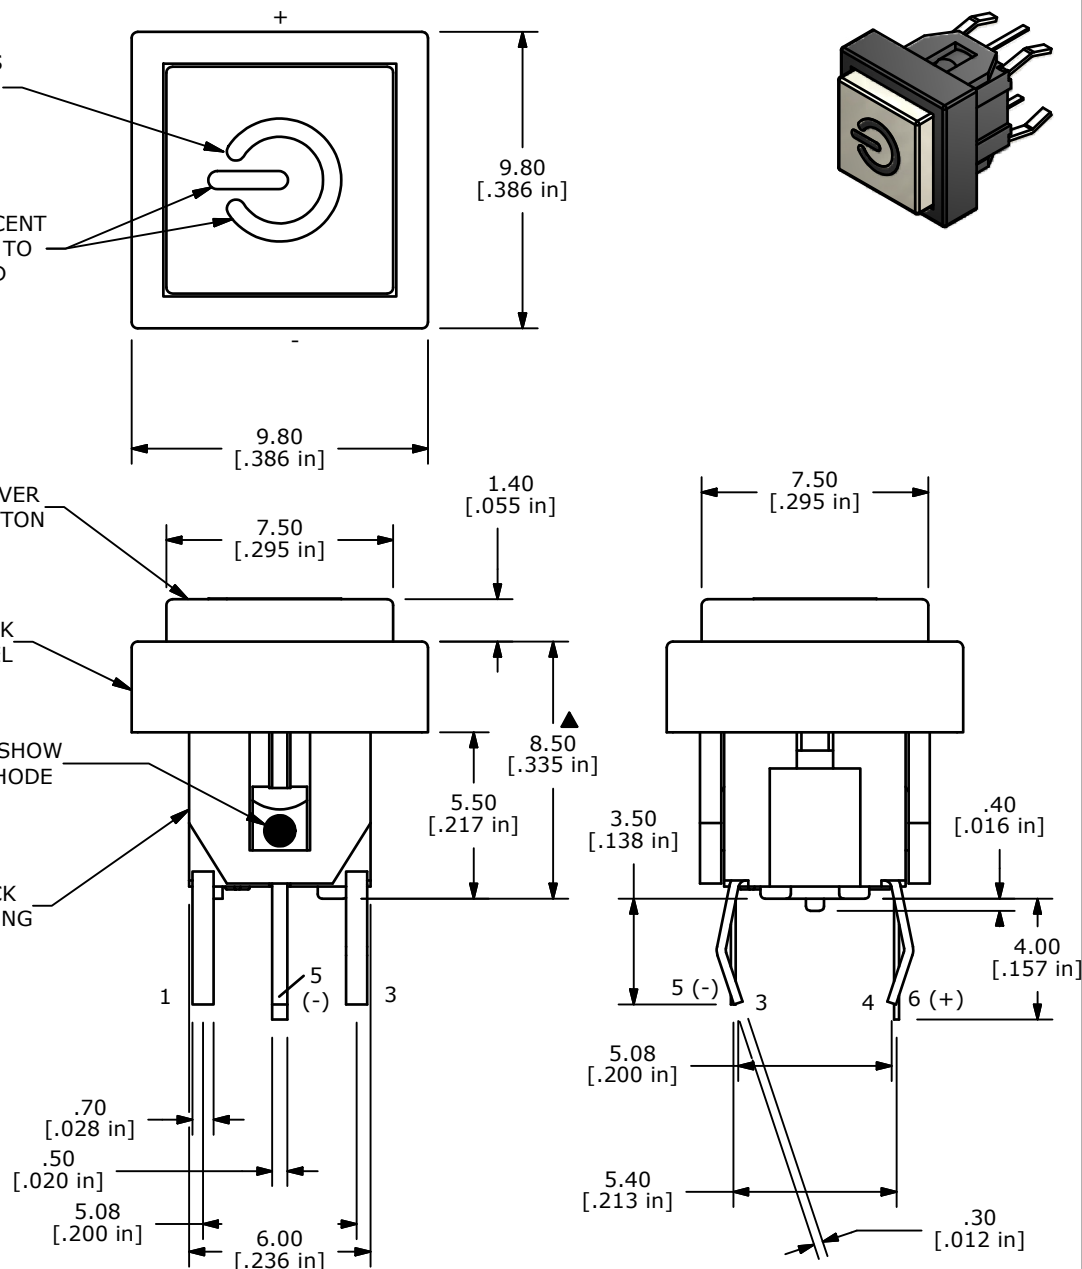

C	20093	CORRECT LED NOTE	08/11/11	BMA
B	19951	CORRECT DRAWING TITLE	05/16/11	BMA
A	19048	Release For Production	5/3/10	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE TL1220S1BB SG-POWER

SCALE 4

DATE 5/3/2010

DR BLR

DWG B260011

REV C