

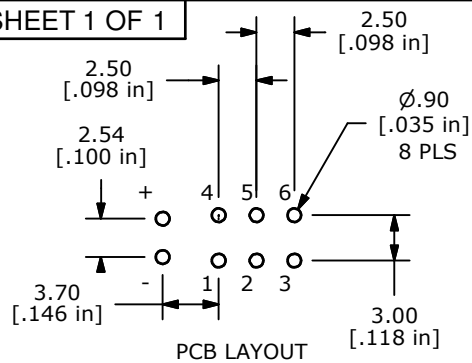


## NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: x.x=± 0.4mm  
x.xx=± 0.25mm
3. RATING: DC 30V, 0.3A
4. OPERATING FORCE: 200± 100gf
5. TRAVEL: FULL: 3.3mm, LOCK: 2.5mm
6. LIFE CYCLES: 10,000 CYCLES
7. OPERATING TEMPERATURE: -20°C TO 70°C
8. CONTACT RESISTANCE: 20mΩ MAX.
9. INSULATION RESISTANCE: 100MΩ MIN@ 500VDC.
- ▲10. LED COLOR: GREEN
11. ▲ DENOTES CRITICAL PARAMETER.
12. 2002/95/EC (RoHS) COMPLIANT.



| LED SPECS                 | UNITS | GREEN           |
|---------------------------|-------|-----------------|
| FORWARD CURRENT           | mA    | 30              |
| FORWARD VOLTAGE @20mA     | V     | 1.7 Typ-2.6 Max |
| LUMINOUS INTENSITY @ 10mA | MCD   | 4.7-7.8         |

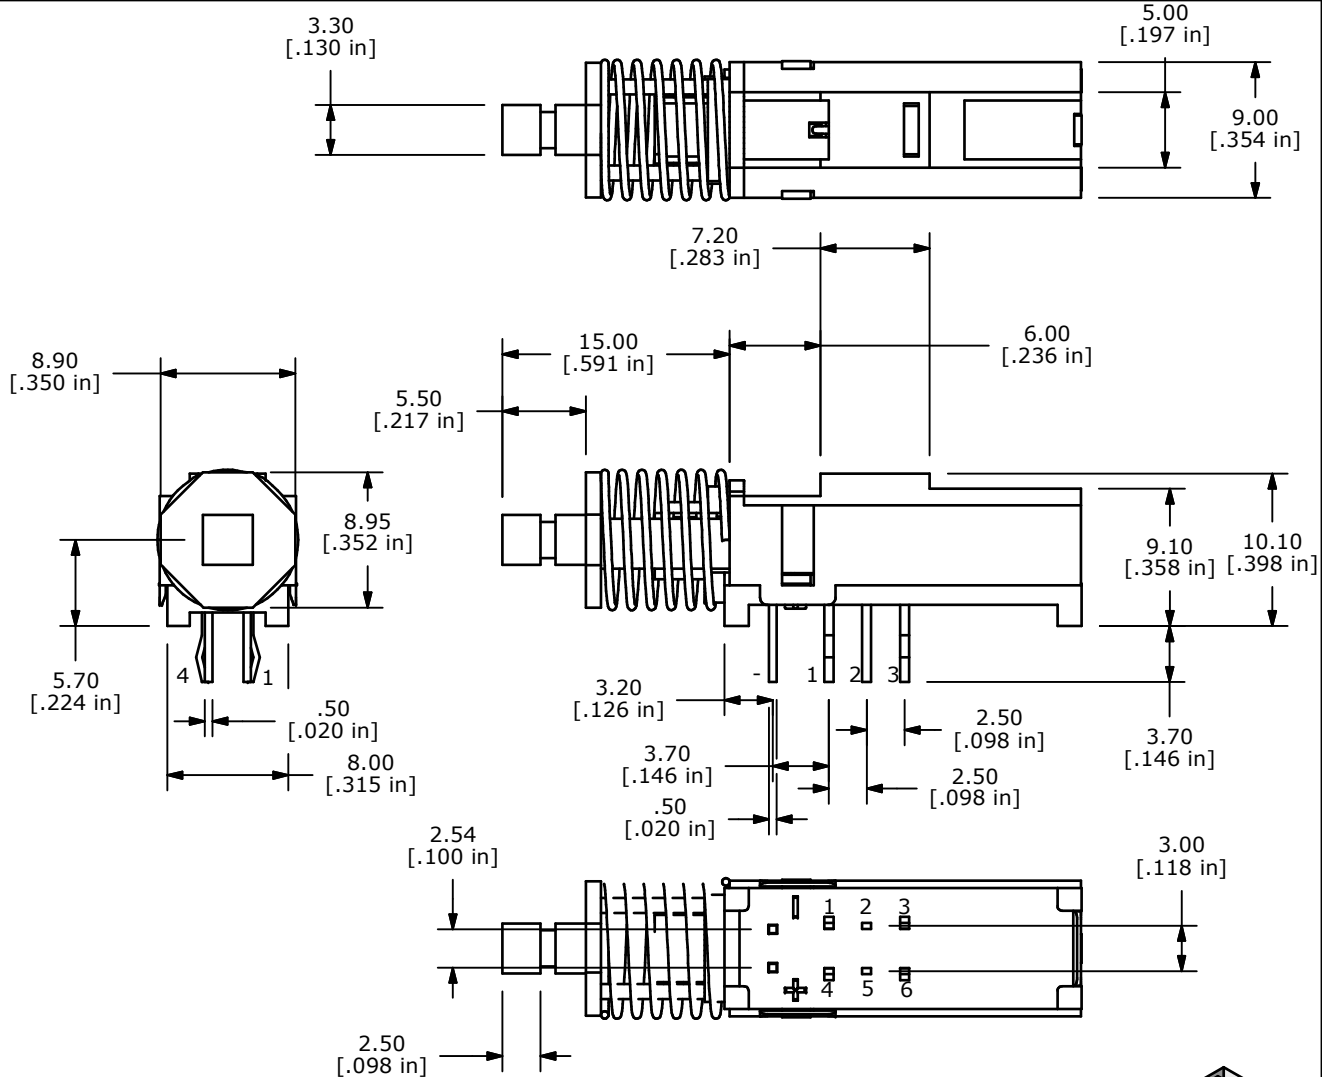

|     |        |                        |          |     |
|-----|--------|------------------------|----------|-----|
| A   | 20898  | RELEASE FOR PRODUCTION | 11/30/12 | EBP |
| REV | PCR NO | DESCRIPTION            | DATE     | BY  |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY  
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE WBL2UEEGQ

SCALE

DATE

11/30/2012

DR

EBP

DWG

B400015

REV

A