
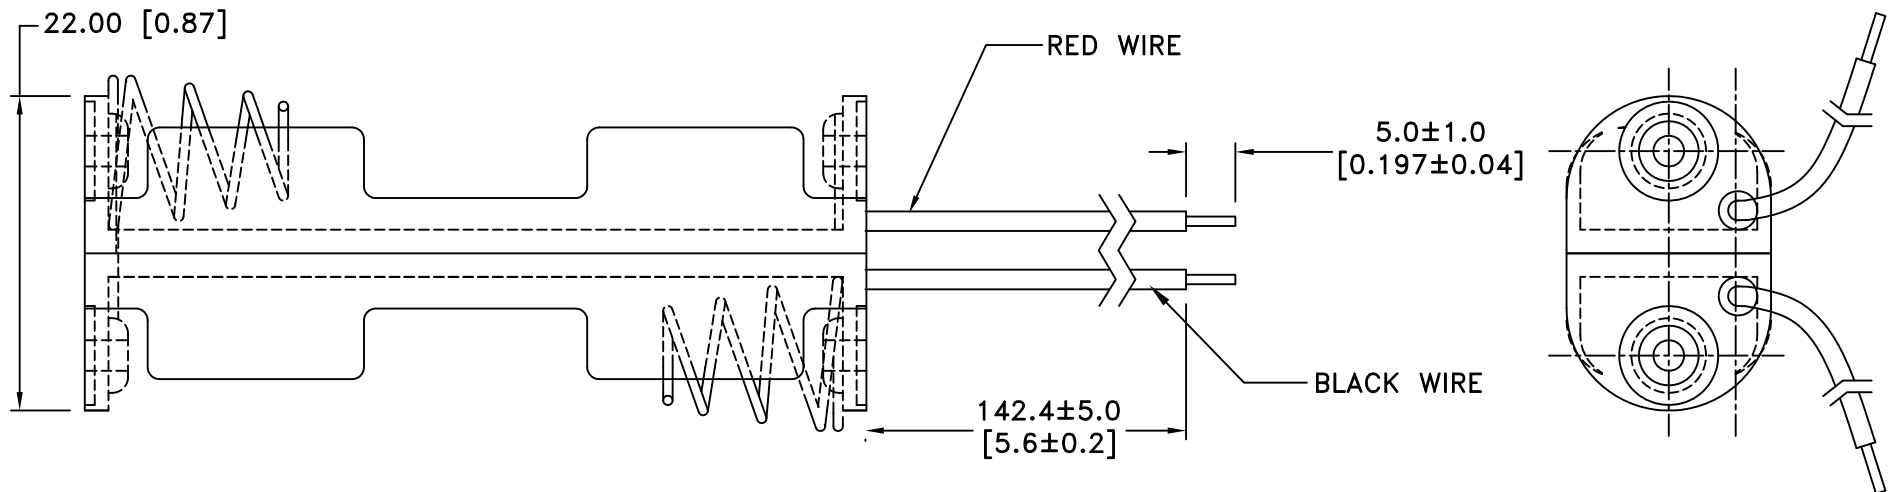



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
04/30/05	A	(1) 51.80 was 50.80 (2) 14.00 was 12.95 (3) 22.00 was 20.32 (4) 5.0 was 3.18 (5) 142.4 was 152.4	T.B.	B.S.	
10/12/07	B	Added "ROHS COMPLAINT" Updated Material spec.	T.B.	B.S.	
03/15/13	C	Updated to ROHS 2 COMPLAINT	T.B.	B.S.	

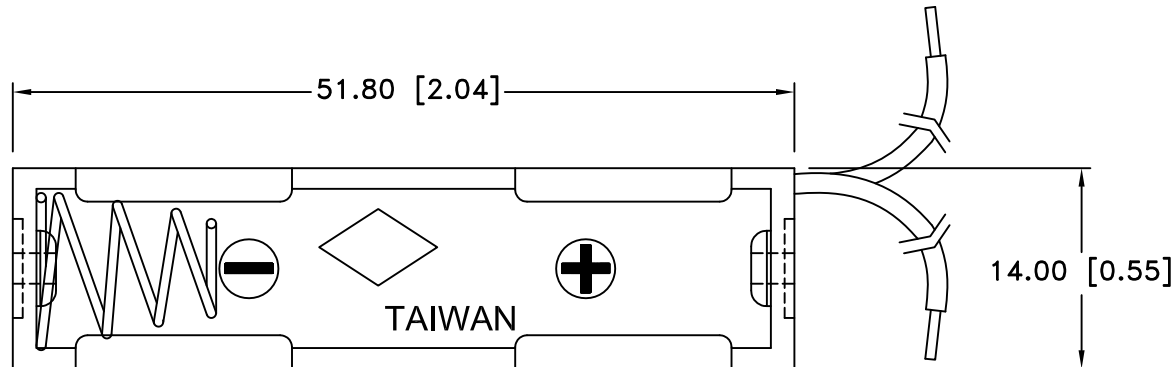

NOTES:

Plastic material - Polypropylene, PP-1040
 Flammability Rating -UL94-HB, UL File NO. E216959
 Temperature Range: -10°C to +100°C
 Springs - Nickel Plated Spring Steel
 Wire - 26 AWG, UL1007, CSA
 Rivets - Brass, Nickel Plated
 Contact Resistance: Under 50mΩ for +/- contacts per EIA-540J000
 ROHS 2 COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S.
			Approved By T.B.
Fractional ± .8 (.030)	Title TWO "AAA" CELL HOLDER		
Angular ± 3°	Date 03/15/13	Drawing Number BC22AAAW	