



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
6/19/09	A	DIM. 151.13 WAS 149.2 DIM. 118.11 WAS 116.32	T.B.	B.S.	
4/19/13	B	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	

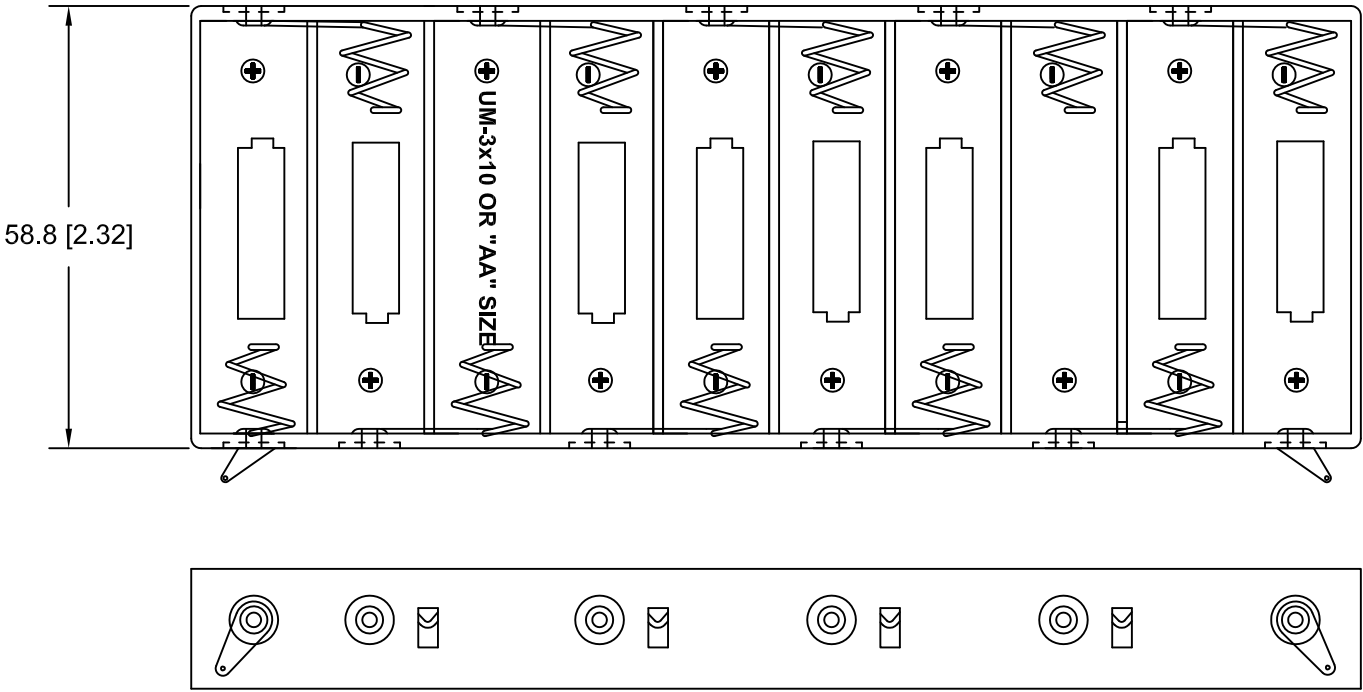

MATERIAL:

HOUSING: POLYPROPYLENE, BLACK
 FLAMMABILITY RATING -UL94 HB, UL FILE NO. E216959
 TEMPERATURE RANGE: -10°C to +100°C
 SPRINGS: SPRING STEEL, NICKEL PLATED
 RIVETS: BRASS, NICKEL PLATED
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS
 PER EIA-540J000

ROHS 2 COMPLIANT

Tolerance (Inches)	<div>Memory Protection Devices, Inc</div> <div>200 Broad Hollow Road, Farmingdale, New York 11735</div>		
Decimal ±.5 (.020)		Scale	Drawn By B.S.
			Approved By T.B.
Fractional ± .8 (.030)	Title TEN "AA" CELL HOLDER		
Angular ± 3°	Date 4/19/13	Drawing Number BH10AAL	