
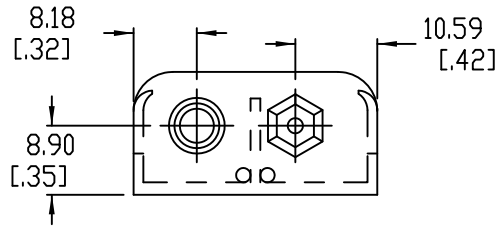
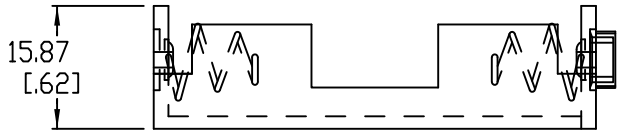


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
12/26/03	A	Changed Material Specification	T.B.	B.S.	
04/26/13	B	Updated to ROHS 2 Compliant	T.B.	B.S.	

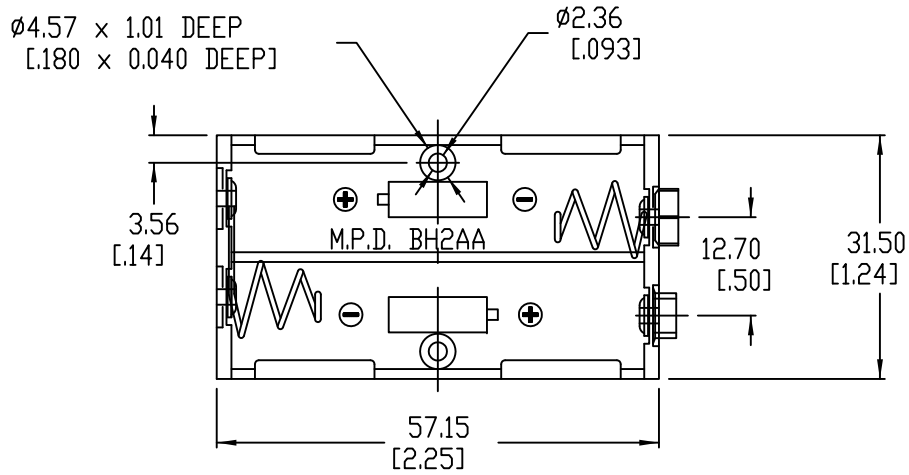


**MOUNTING INSTRUCTION:**

USE 2-56 MACHINE SCREWS OR EYELETS 0.089" OD BY 0.15" FLANGE STIMPSON GS-3 SERIES OR EQUIVALENT ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

**NOTES:**

- 1. MATERIAL:
  - HOUSING : IMPACT RESISTANCE NYLON 6, BLACK, UL94V-0, UL FILE NO. E48285
  - RIVETS: BRASS, NICKLE PLATED.
  - SPRING: SPRING STEEL, NICKLE PLATED.
  - TEMPERATURE RANGE: -40°C TO +140°C
  - RESISTANT TO SOLVENTS, COMMON OILS AND REFRIGERANTS
  - ROHS 2 COMPLIANT

Tolerance (Inches)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
Decimal		Scale	Drawn By B.S.
±.5 (.020)			Approved By T.B.
Fractional	Title		
± .8 (.030)	2AA BATTERY HOLDER WITH SNAP FASTENERS		
Angular	Date	Drawing Number	
± 3°	04/26/13	BH2AA-SF	