


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
09/28/12	A	REDRAWN IN AUTOCAD	T.B.	B.S.	
02/22/13	B	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	

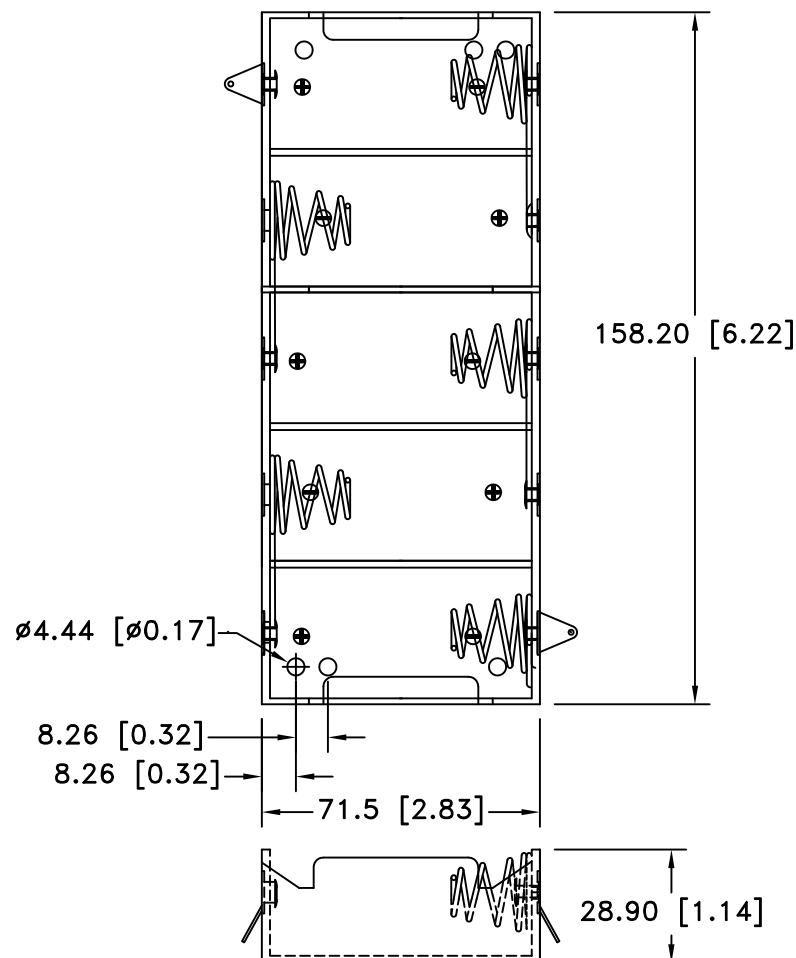

NOTES:

1. MATERIAL:

HOUSING : BLACK POLYPROPYLENE
 FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959
 TEMPERATURE RANGE: -10°C to +100°C
 RIVETS: BRASS, NICKLE PLATED.
 SPRING: SPRING STEEL, NICKLE PLATED.
 CONTACT RESISTANCE: UNDER 50m Ω FOR +/- CONTACTS PER EIA-540J000

ROHS 2 COMPLIANT.

MOUNTING INSTRUCTION:

USE 2-56 MACHINE SCREWS OR EYELETS 0.089" OD
 BY 0.15" FLANGE STIMPSON GS-3 SERIES OR EQUIVALENT.
 ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

Tolerance (Except as noted)	<div><div><div></div><div></div><div></div><div></div></div><div>MPD</div></div> Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title FIVE "D" CELL HOLDER WITH SOLDER LUGS		
Angular ± 3°	Date 02/22/13	Drawing Number BH5DL	