


BOLT HOLE CASTERS

CASBRBH,CASERBH,
CASNYBH,CASPUBH

- Allows customization of applications by using a bolt in your choice of length or thread
- To attach the bolt, remove the wheel from the caster; attach the caster bracket to device and reassemble the caster

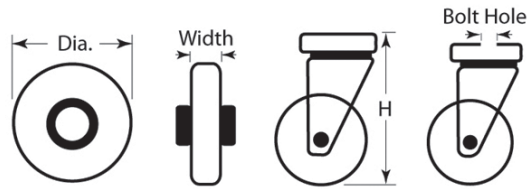

Nylon



Polyurethane



Black Rubber



Elastic Rubber

Standard Pack: 4 per bag								
Part No.	Material	Approx. Load Capacity Lbs.	Duty	Nominal Ø	Wheel Width	"H" Overall Height	Bolt Hole	Wheel Bearing
CASBRBH05A	Black Rubber	88	Light	3.0 (76.2)	.90 (22.9)	3.77 (95.8)	Ø1.25 (31.8)	Roller Bearing
CASBRBH10A		132	Light	4.0 (101.6)	1.06 (26.9)	5.03 (127.8)	Ø1.45 (36.8)	
CASBRBH15A		220	Medium	5.0 (127)	1.33 (33.8)	5.98 (151.9)	Ø1.37 (34.8)	
CASERBH05A	Elastic Rubber	88	Light	3.0 (76.2)	1.29 (32.8)	3.97 (100.8)	1.10 X1.57 (27.9 X3 9.9)	Roller Bearing
CASERBH10A		132	Light	4.0 (101.6)	1.29 (32.8)	5.07 (128.8)	1.10 X1.57 (27.9 X3 9.9)	
CASERBH15A		220	Medium	5.0 (127)	1.33 (33.8)	6.10 (154.9)	1.10 X1.57 (27.9 X3 9.9)	
CASNYBH05A	Nylon	176	Medium	3.0 (76.2)	.86 (21.8)	3.97 (100.8)	Ø.41 (10.4)	Plain
CASNYBH10A		220	Medium	4.0 (101.6)	1.02 (25.9)	5.19 (131.8)	Ø.50 (12.7)	
CASPUBH05A		176	Medium	3.0 (76.2)	1.25 (31.8)	3.97 (100.8)	1.10 X1.57 (27.9 X3 9.9)	
CASPUBH10A	Polyurethane	264	Medium	4.0 (101.6)	1.25 (31.8)	5.07 (128.8)	1.10 X1.57 (27.9 X3 9.9)	Precision Ball Bearing
CASPUBH15A		330	Medium	5.0 (127)	1.25 (31.8)	6.10 (154.9)	1.10 X1.57 (27.9 X3 9.9)	