

EuroMag Series PCB Mount Terminal Blocks

EM2929 Series Euro-Mag Terminal Blocks

Hi-Current; 10.16 Centers

SPECIFICATIONS

Rating: 65A, 600V

Center Spacing: 0.40" (10.16mm)

Wire Range: #6-20 AWG

Housing Material: UL rated 94V0 Thermoplastic

Contact Material: Tin-Plated Copper

Cage Clamp: Steel, Chromate Plated

Screw Size: M4 Stainless Steel

Operating Temperature: 105°C (221°F) max., -40°C (-40°F) min.

Torque Rating: 15 lb-in.

Recommended PCB Hole Diameters: 0.055" (1.40mm)

Construction: Mold to length

Agency Information: cULus File E62622; CE Certified





EM292908

Dimensions - mm (in)

Poles	L (mm)
2	20.34
3	30.50
4	40.66
5	50.82
6	60.98
7	71.14
8	81.30

To convert to inches, divide by 25.4

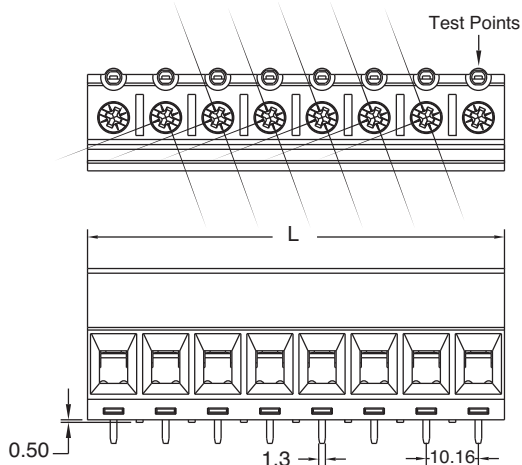

Part Numbering System

Series

of Poles

EM2929

02 08

02 to 08

EM2939 Series

Euro-Mag Terminal Blocks

Hi-Current, 15.00 Centers

SPECIFICATIONS

Rating: 115A, 600V with No Bottom Cover (NC) Option.

Center Spacing: 0.591" (15.00mm)

Wire Range: #2-20 AWG

Housing Material: UL rated 94V0 Thermoplastic

Contact Material: Tin-Plated Copper

Cage Clamp: Steel, Chromate-Plated

Screw Size: M5 Stainless Steel


Operating Temperature: 105°C (221°F) max., -40°C (-40°F) min.

Torque Rating: 15 lb-in.

Recommended PCB Hole Diameters: 0.063" (1.60mm)

Construction: Mold to length

Agency Information:  US File E62622; CE Certified

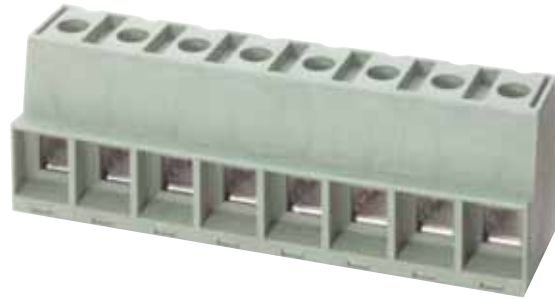


EM293908

Dimensions - mm (in)

Poles	L (mm)
2	30.0
3	45.0
4	60.0
5	75.0
6	90.0
7	105.0
8	120.0

To convert to inches, divide by 25.4

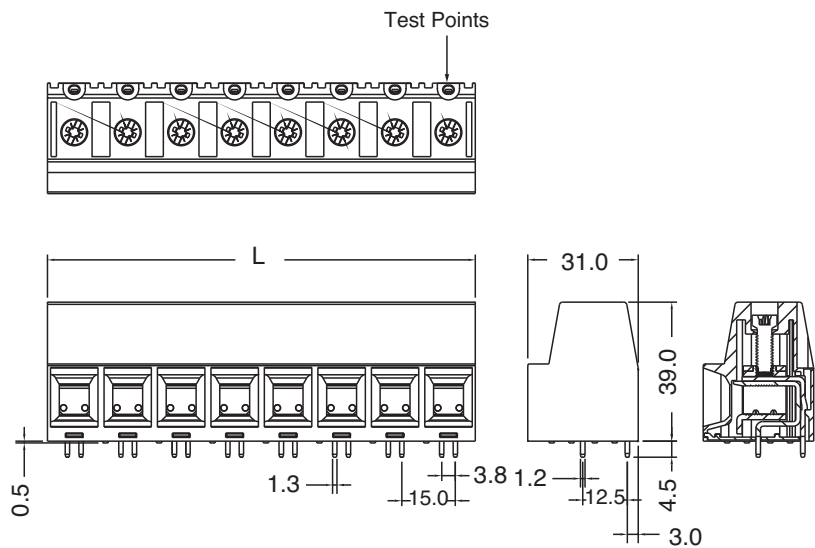

Part Numbering System

Series

EM2939

of Poles

02 08

02 to 08

Bottom Cover Option

(NC)

N C

*NC = No Bottom Cover

EuroMag Series PCB Mount Terminal Blocks

EM3905 Series

Euro-Mag Terminal Blocks

High Current; Two Tier; 5.00 Centers; Modular

SPECIFICATIONS

Rating: 28A, 250V

Center Spacing: 0.197" (5.00mm)

Wire Range: #12-24 AWG

Housing Material: UL rated 94V0 Thermoplastic

Contact Material: Tin-Plated Brass

Cage Clamp: Brass, Nickel-Plated

Screw Size: M2.6 Nickel-Plated Steel

Operating Temperature: 105°C (221°F) max., -40°C (-40°F) min.

Torque Rating: 4.5 lb-in.

Recommended PCB Hole Diameters: 0.055" (1.40mm)

Construction: Modular design features dovetails for interlocking to achieve longer lengths


Agency Information:  File E62622; CE Certified



EM390508

EM390504

Dimensions - mm (in)

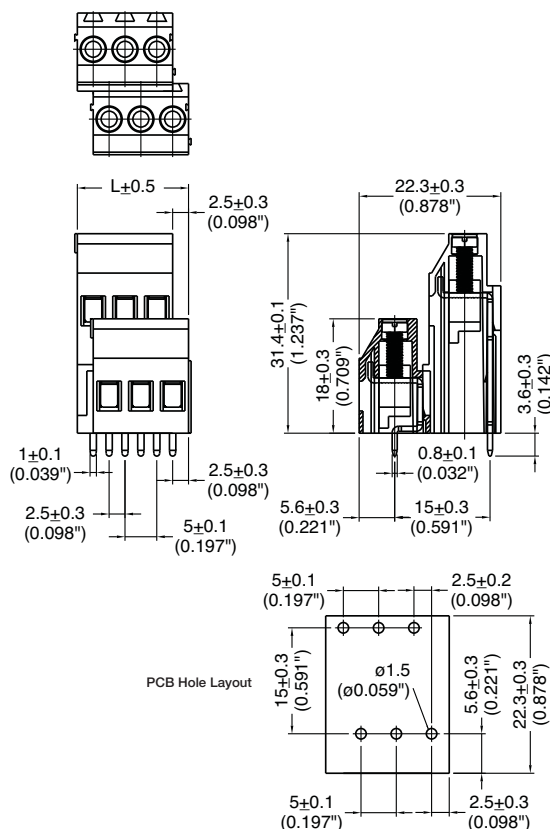

To convert to inches, divide by 25.4

Poles	L (mm)	Poles	L (mm)
2	12.5	14	72.5
3	17.5	15	77.5
4	22.5	16	82.5
5	27.5	17	87.5
6	32.5	18	92.5
7	37.5	19	97.5
8	42.5	20	102.5
9	47.5	21	107.5
10	52.5	22	112.4
11	57.5	23	117.5
12	62.5	24	122.5
13	67.5		

Part Numbering System

Series

of Poles

EM3905

02 to 24


EM3908 Series**Euro-Mag Terminal Blocks**

High Current; Two-Tier; 5.08 Centers; Modular

SPECIFICATIONS**Rating:** 28A, 250V**Center Spacing:** 0.20" (5.08mm)**Wire Range:** #12-24 AWG**Housing Material:** UL rated 94V0 Thermoplastic**Contact Material:** Brass Tin-Plated**Cage Clamp:** Brass, Nickel-Plated**Screw Size:** M2.6 Nickel-Plated Steel**Operating Temperature:** 105°C (221°F) max., -40°C (-40°F) min.**Torque Rating:** 4.5 lb-in.**Recommended PCB Hole Diameters:** 0.055" (1.40mm)**Construction:** Modular design features dovetails for interlocking to achieve longer lengths**Agency Information:**  File E62622; CE Certified

EM390808

EM390804

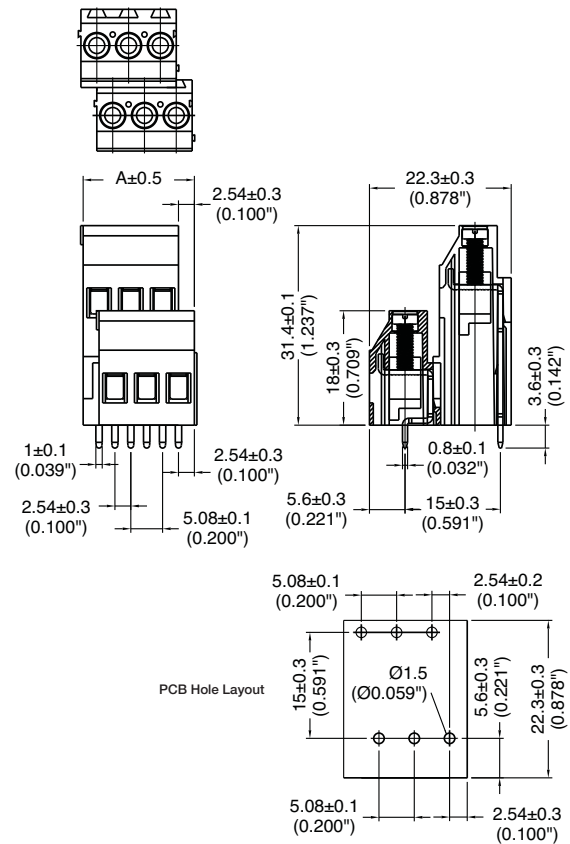Dimensions - mm (in)

To convert to inches, divide by 25.4

Part Numbering System**Series****# of Poles**

E	M	3	9	0	8		
---	---	---	---	---	---	--	--

02 to 24