

M BZE6-2RN-F6

DRAWING
NUMBER

4

ISSUE

REPLACES

RELEASE NO. PR-19699

CHECK

REVISIONS

A 73655
TSM
22 APR 93
B 75965
TSM
19 AUG 93
C 0017273
KSP
23 NOV 05



CHECK

23 NOV 05

CHECK

SAV 22 FEB 92

RASTER

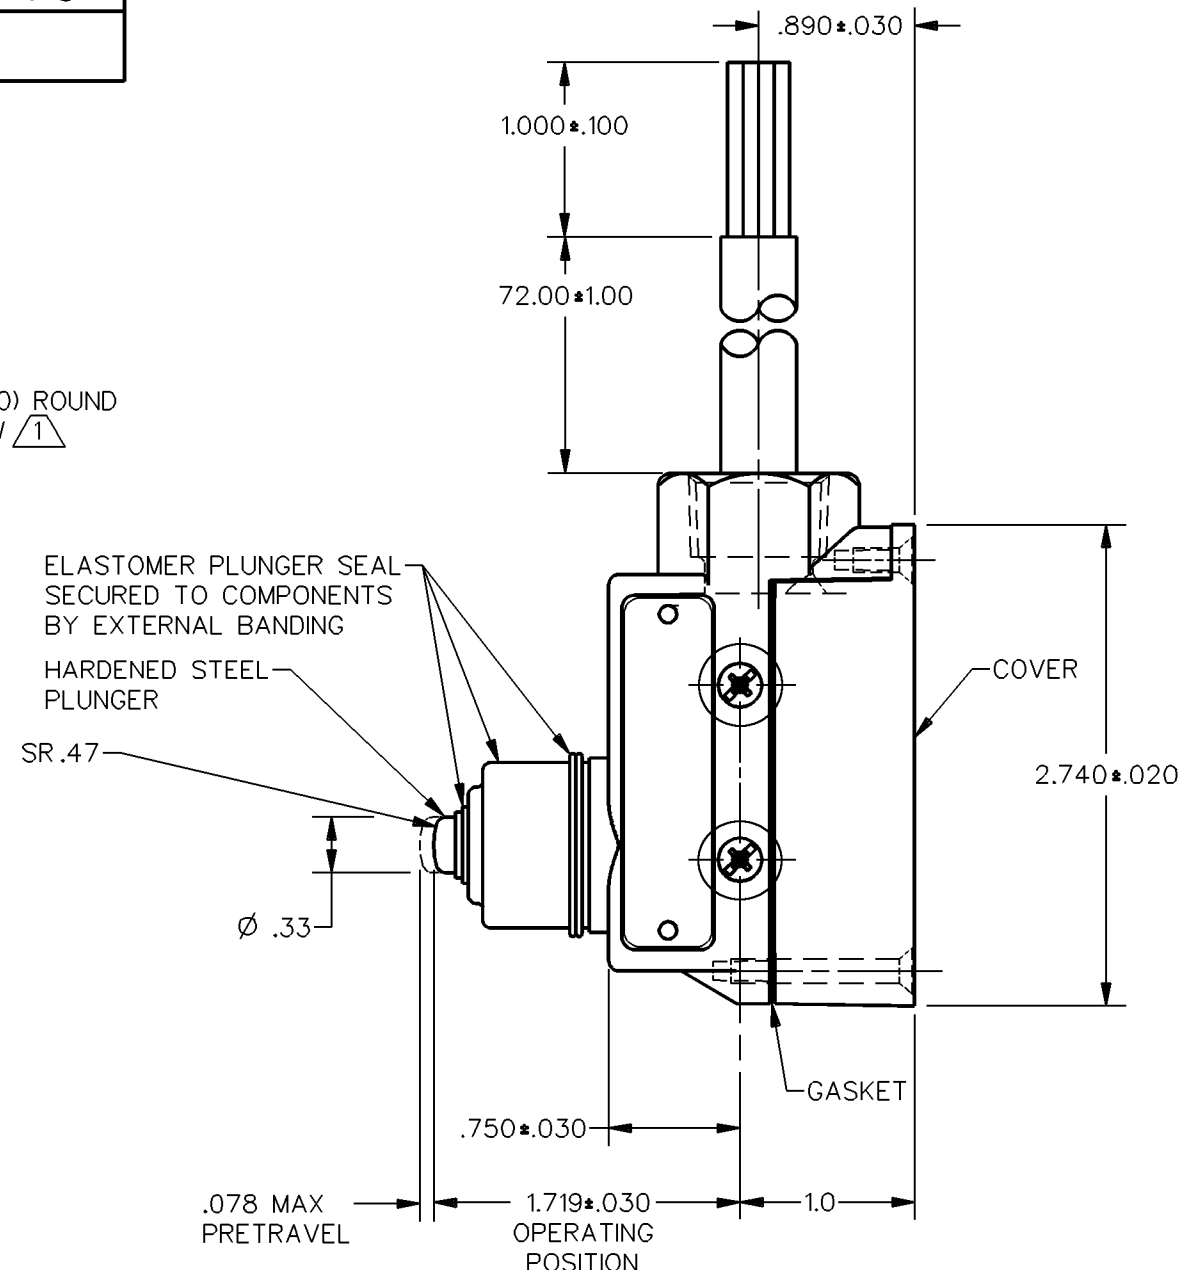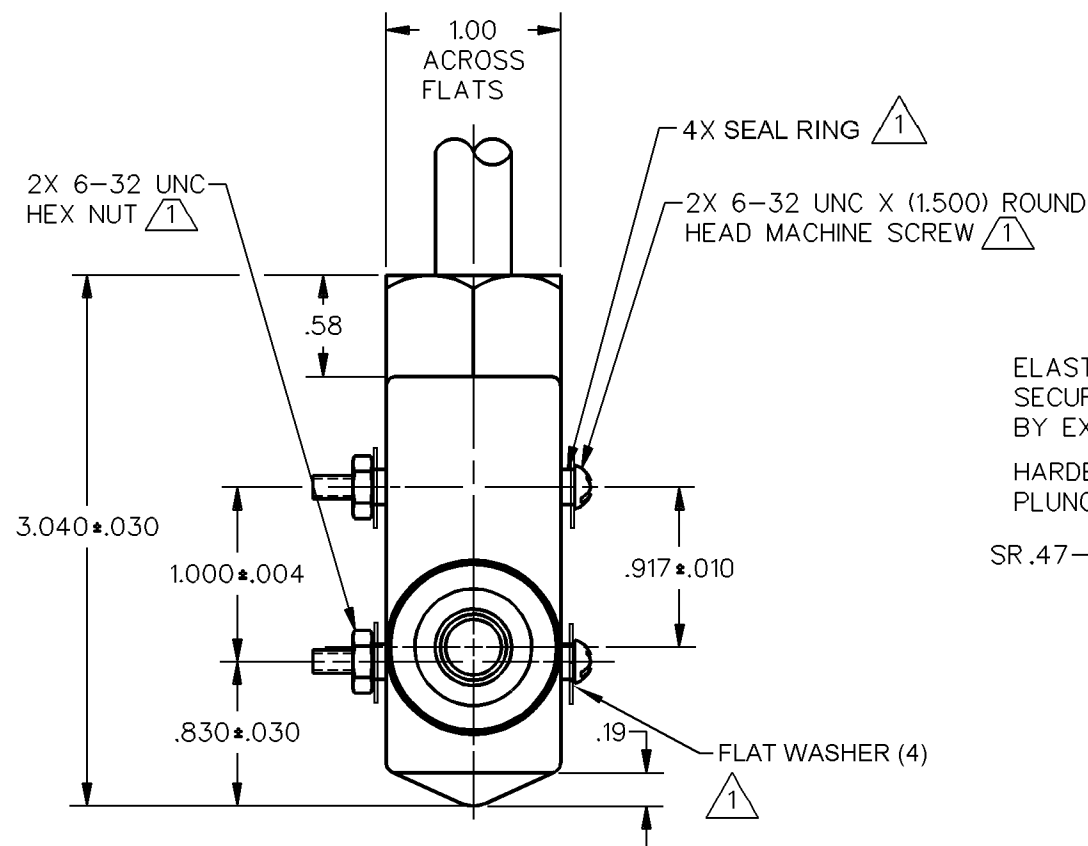


- NOTE
- ① FURNISHED UNASSEMBLED
 - 2 — SWITCH CAVITY FULLY POTTED
 - 3 — SEAL RATING: NEMA 1, 3, 4, 12, 13 IP 56

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CHARACTERISTICS	
OPERATING FORCE — — — — —	15-39 OZ
RELEASE FORCE — — — — —	10 OZ MIN
DIFFERENTIAL TRAVEL — — — — —	.002 MAX
OVERTRAVEL — — — — —	.219 MIN

ELECTRICAL DATA	
CONTACT ARRANGEMENT S P D T	
L270 10A 125, 250 OR 480 VAC 2A 600 VAC 1/8HP 125 VAC, 1/4HP 250 VAC 1/2A 125 VDC, 1/4A 250 VDC	
1.5A, 240 Vac	

THIRD ANGLE PROJECTION



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.)	±.030
TWO PLACE (.00)	±.015
THREE PLACE (.000)	±.005
ANGLES	±

WEIGHT

ANSI Y14.5M-1982 APPLIES

