

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH — ENCLOSED

CATALOG LISTING
BZE6-2RN-R

CATALOG LISTING
BZE6-2RN-R

ISSUE
M

10

REPLACES

PR-19699

29AUG07

PSR

CHECK

23AUG06

DVM

CHECK

22NOV05

BP


CHECK

24 FEB 92


RASTER
DRAWN

S A V

REVISIONS
A REINST PR19699 S A V 24 FEB 92
B CO- 73655 T S M 22 APR 93
C CO- 77179A K D R 17 FEB 94
D 0017057 VKR 22NOV05
E 0024311 RKP 23AUG06
F 0025947 KNS 30OCT06
G 0033014 BS 29AUG07

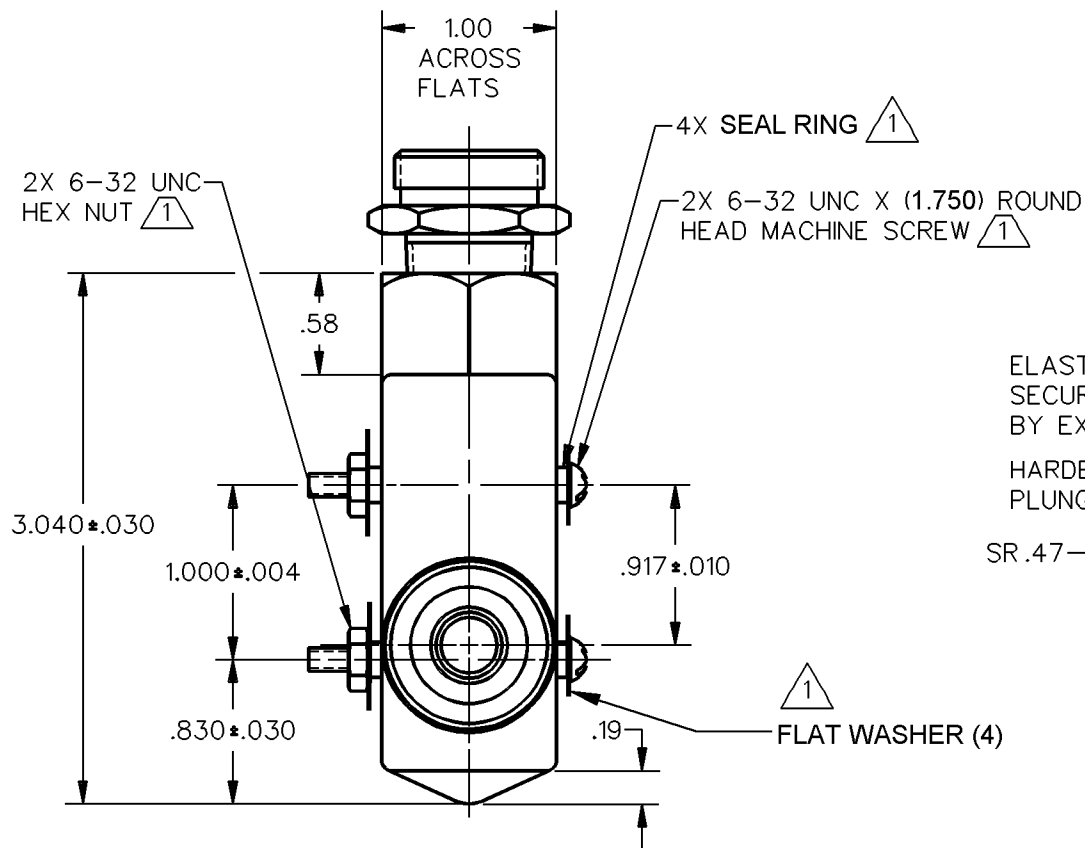

- NOTE
- 1 FURNISHED UNASSEMBLED
 - 2 - 3X 6-32 UNC X (.219) BINDING HEAD SCREW AND CUPWASHER USED ON TERMINALS
 - 3 SEALED "MINI" STYLE RECEPTACLE, BRAD HARRISON PART NO. 41103 OR EQUIVALENT
 - 4 - SEAL RATING: NEMA 1,3,4
IP66

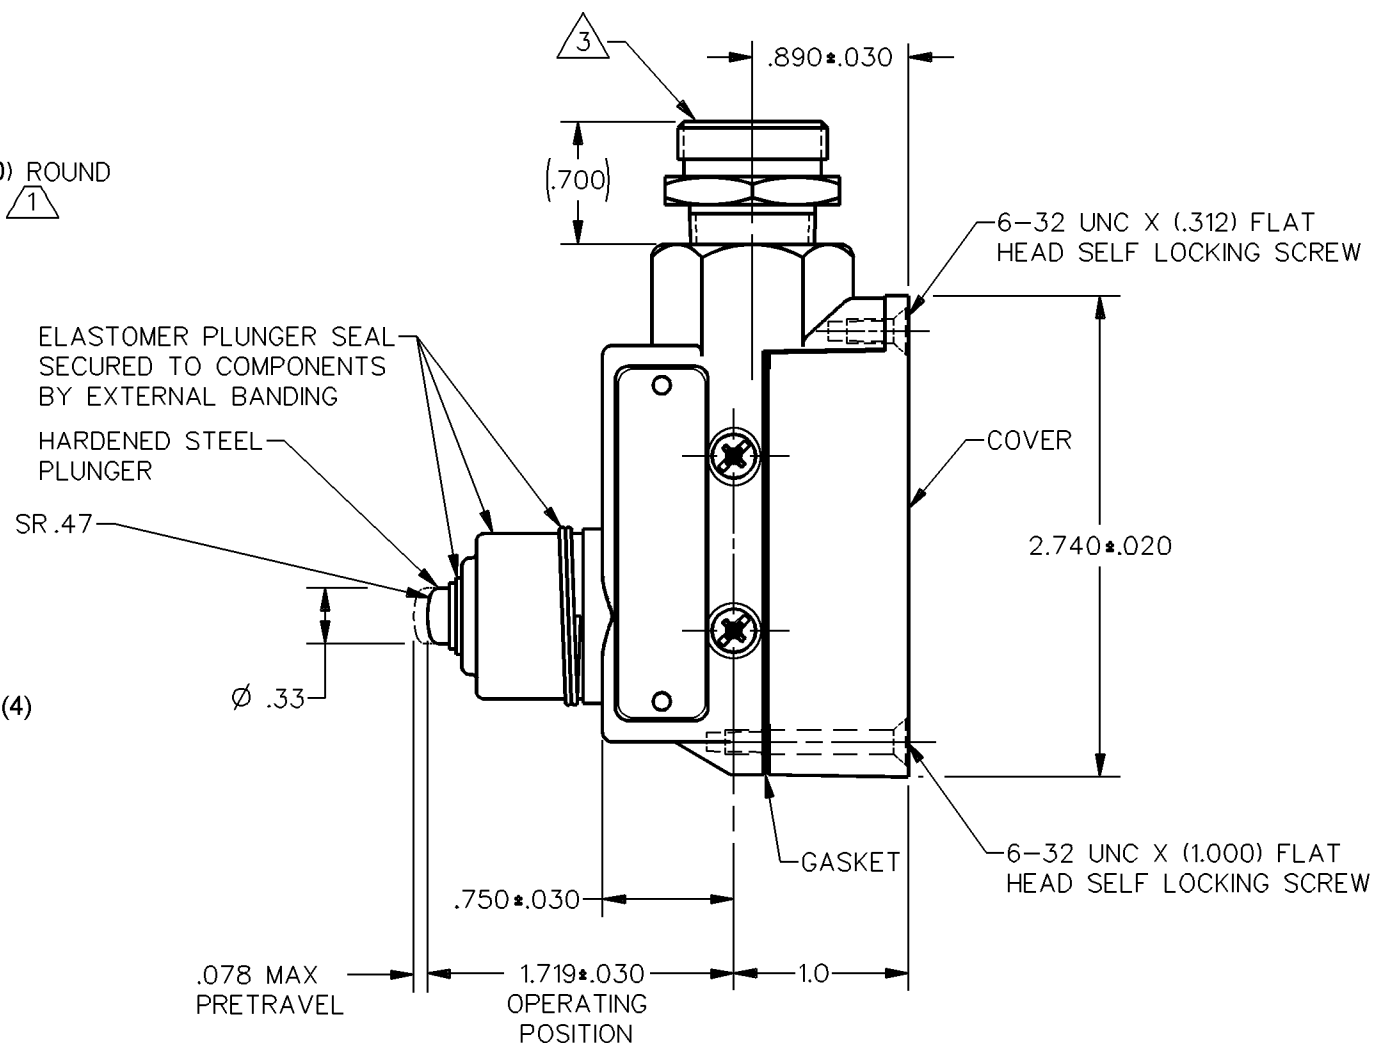

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CHARACTERISTICS

OPERATING FORCE — — — — — 9-24 OZ
RELEASE FORCE — — — — — 4 OZ MIN
DIFFERENTIAL TRAVEL — — — — .002 MAX
OVERTRAVEL — — — — — .219 MIN
BASIC SWITCH REPLACEMENT — — — BZ-2RQ77


ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L271 8A-125, 250 OR 480 VAC
2A 600 VAC
1/8HP 125 VAC, 1/4HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC



THIRD ANGLE PROJECTION



SCALE FULL


DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT

ANSI Y14.5M-1982 APPLIES

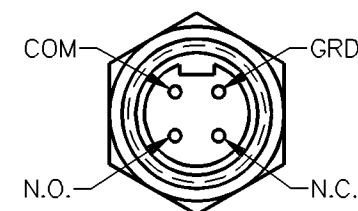

RECEPTACLE END VIEW