

BZE6-2RN19

M

DRAWING
NUMBER

10

ISSUE

REPLACES

PR-11899

RELEASE NO.

29AUG07

PSR

CHECK

24AUG06

DVM

CHECK

8 FEB 83

G

H

J

K

A


G

4 FEB 83

MASTER
DRAWN

REVISIONS

A	PR-11899
4	KAG FEB 83
B	C053191F TSK 13 APR 84
C	C054958 G J W 7 JAN 85
D	C072476 MAM 4 SEP 92
E	CO- 77179A K B R 17 FEB 94
F	0017057 VKR 23 NOV 05
G	0023923 RKP 24AUG06
H	0025947 KNS 30OCT06
J	0033014 BS 29AUG07

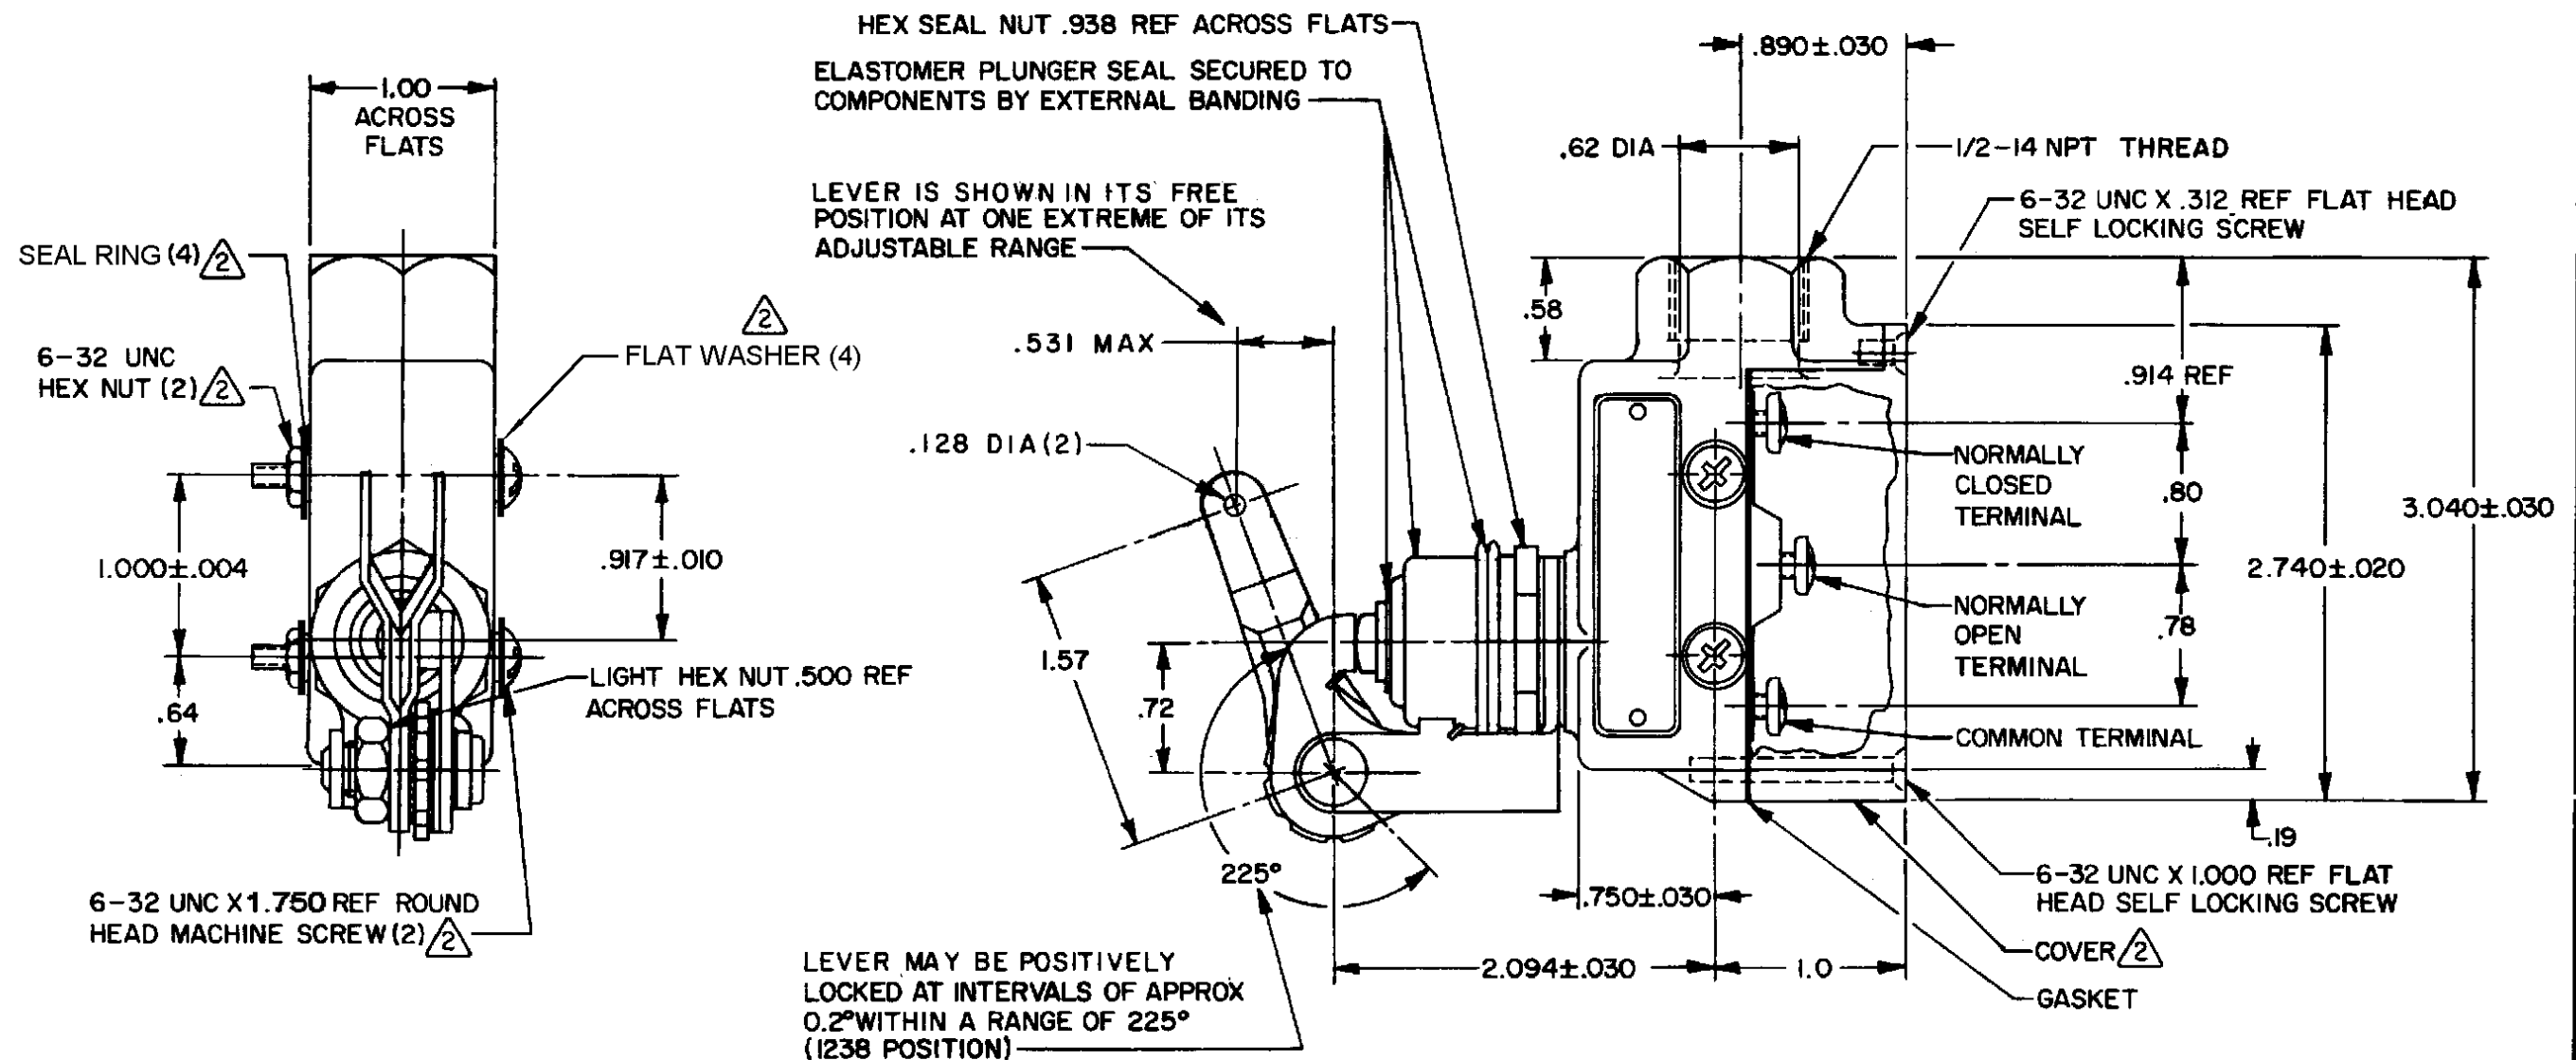

NOTES

- 1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3)
- 2 - FURNISHED UNASSEMBLED
- 3 - LEVER BRACKET ASSEMBLY MAY BE SET AT ANY POSITION AROUND AXIS OF PLUNGER
- 4 - SEAL RATING: NEMA 1,3,4
IP66

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS AT 1.57 LENGTH

OPERATING FORCE ----- 10-20 OZ

RELEASE FORCE ----- 6 OZ MIN

PRETRAVEL ----- .188 MAX

DIFFERENTIAL TRAVEL ----- .006 MAX

OVERTRAVEL ----- .219 MIN

FREE POSITION ----- BZ-2RN702

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

15A-125, 250 OR 480 VAC, 2A-600 VAC
1/8 HP-125 VAC; 1/4 HP-250 VAC
1/2A-125 VDC; 1/4A-250 VDC
CODE L74
CE 1.5A, 240 Vac

SCALE FULL				
DO NOT SCALE PRINT				
TOLERANCES				
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 2				
NO PLACES	DIM. mm	TOL. mm/IN	DIM. IN	TOL. mm/IN
ONE PLACE	IN	1/16	IN	0.010
TWO PLACES	IN	0.001	IN	0.001
THREE PLACES	K, HX	0.0001	IN	0.0001
ANGLES				
DESIGN UNITS		US CUSTOMARY		
THIRD ANGLE PROJECTION				
WEIGHT		.71 LB		