

MICRO SWITCH

FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
BZE6-2RN2-S

BZE6-2RN2-S

DRAWING
NUMBER

8

ISSUE

REPLACES

RELEASE NO. PR-14373

29AUG07 PSR

CHECK

30OCT06

PM

CHECK

24AUG06

DVM

CHECK


20 NOV

TSK

REVISIONS

A	C072476	MAM	4 SEP 92
B	C077179A	KDR	17 FEB 94
C	C081513B	JAK	25 FEB 97
D	0017057	VKR	23 NOV 05
E	0023923	RKP	24AUG06
F	0025947	KNS	30OCT06
G	0033014	BS	29AUG07

RASTER
DRAWN

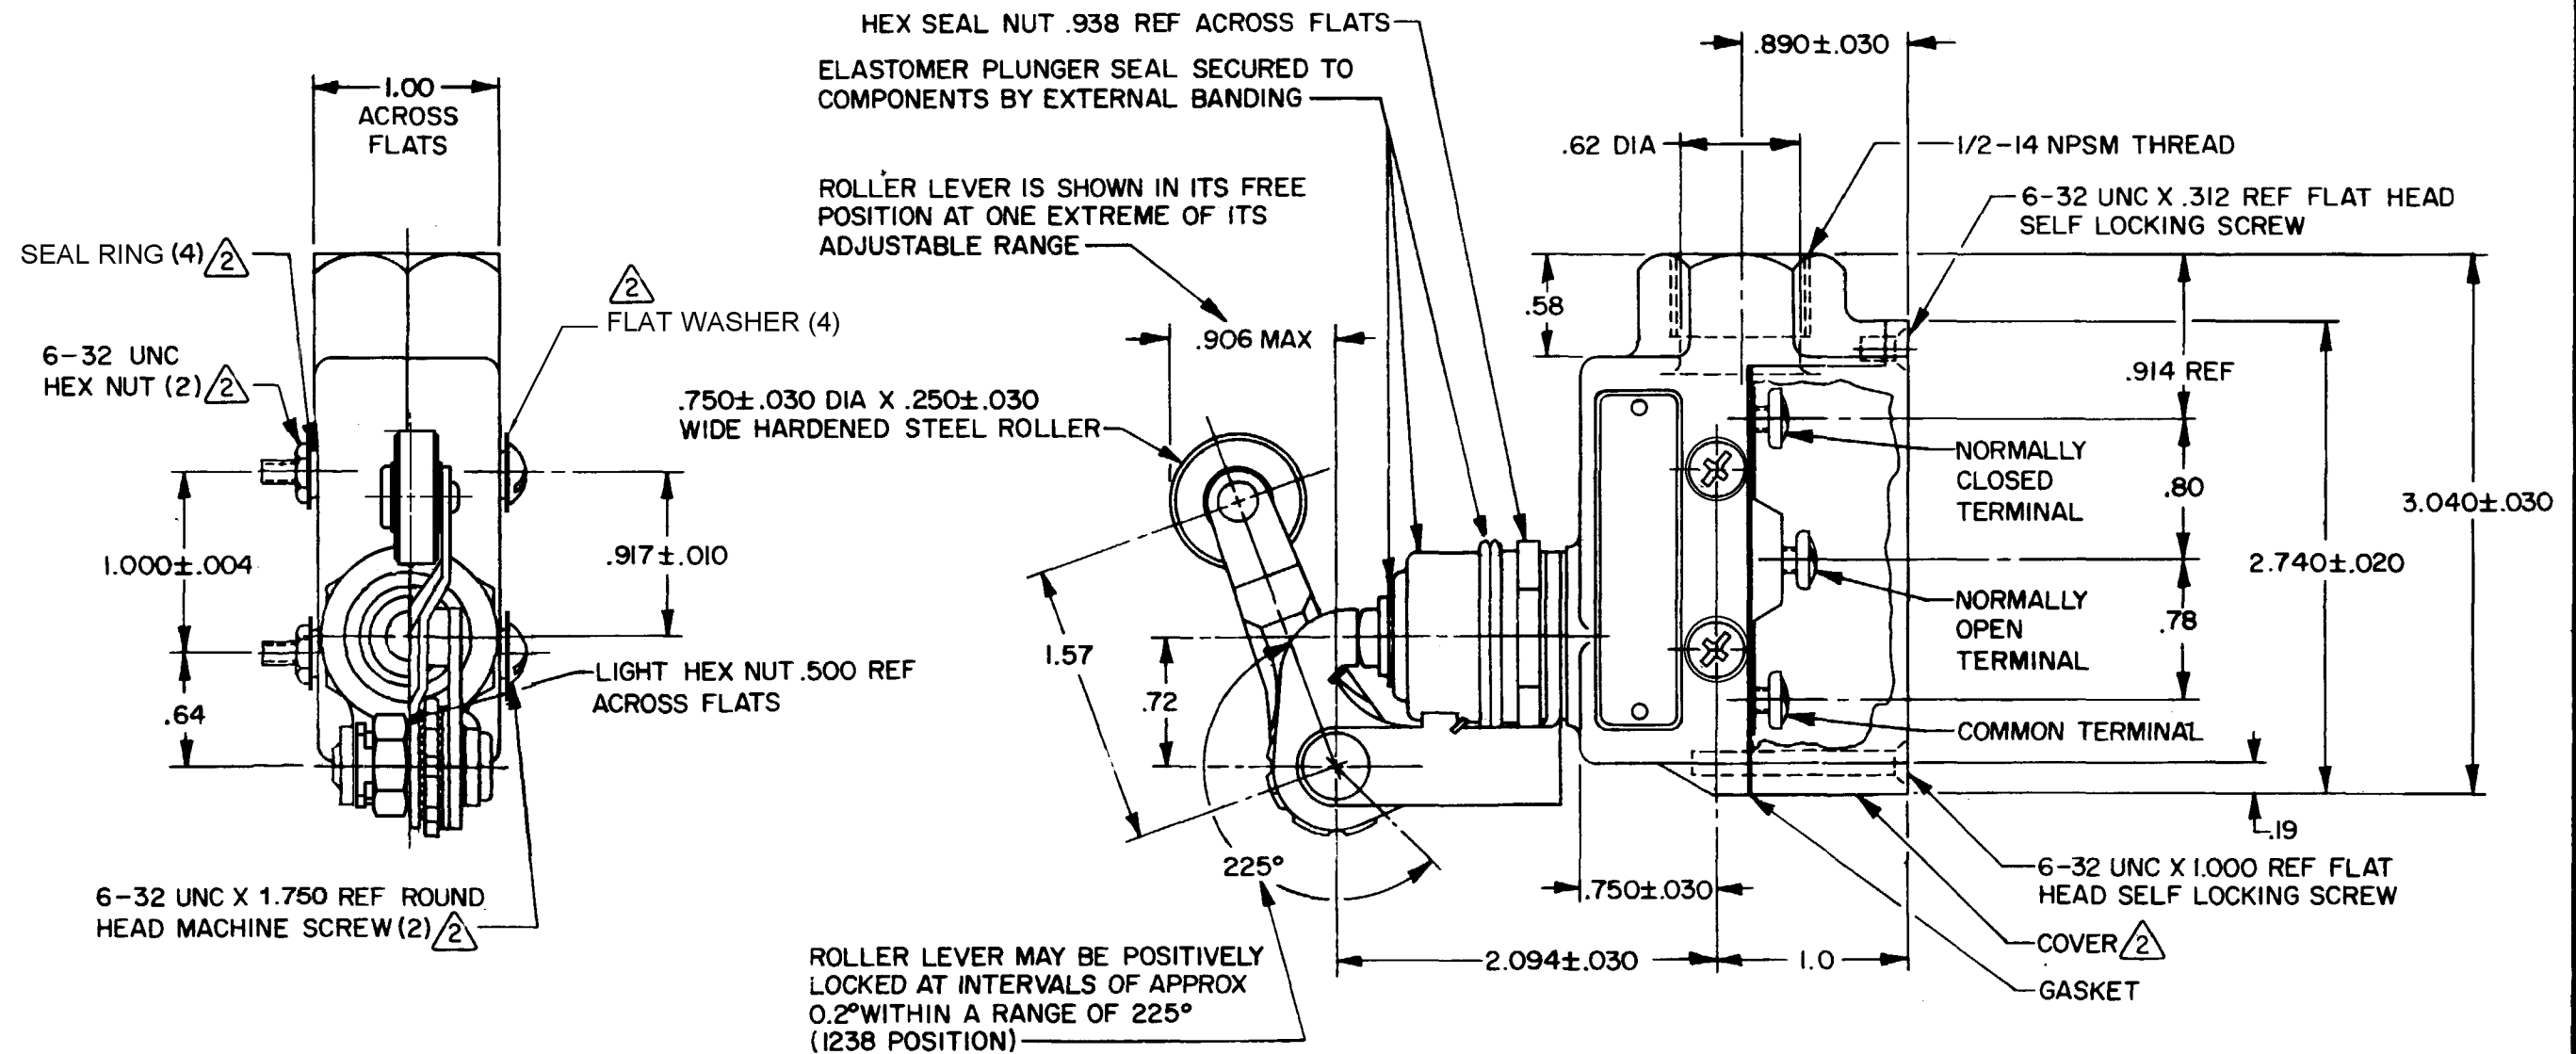

NOTES

- 1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3)
- 2 - FURNISHED UNASSEMBLED
- 3 - ROLLER LEVER BRACKET ASSEMBLY MAY BE SET AT ANY POSITION AROUND AXIS OF PLUNGER
- 4 - SEAL RATING: NEMA 1,3,4 IP66

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE	10-20 OZ
RELEASE FORCE	6 OZ MIN
PRETRAVEL	.188 MAX
DIFFERENTIAL TRAVEL	.006 MAX
OVERTRAVEL	.219 MIN
BASIC SWITCH REPLACEMENT	BZ-2RN702

ELECTRICAL DATA

CONTACT ARRANGEMENT	
S P D T	
L74	
15A 125, 250, OR 480VAC 2A 600 VAC	
1/8 HP 125 VAC, 1/4 HP 250 VAC	
1/2A 125 VDC, 1/4A 250 VDC	

CE 1.5A, 240 Vac

SCALE FULL	
DO NOT SCALE PRINT	
TOLERANCES	
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:	
NO PLACES	TOL. .001
ONE PLACE	TOL. .001
TWO PLACES	TOL. .001
THREE PLACES	TOL. .001
ANGLES	TOL. .001
DESIGN UNITS	SI METRIC
THIRD ANGLE PROJECTION	
WEIGHT .71 LB	