


MICRO SWITCH

FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
BZE6-2RN281

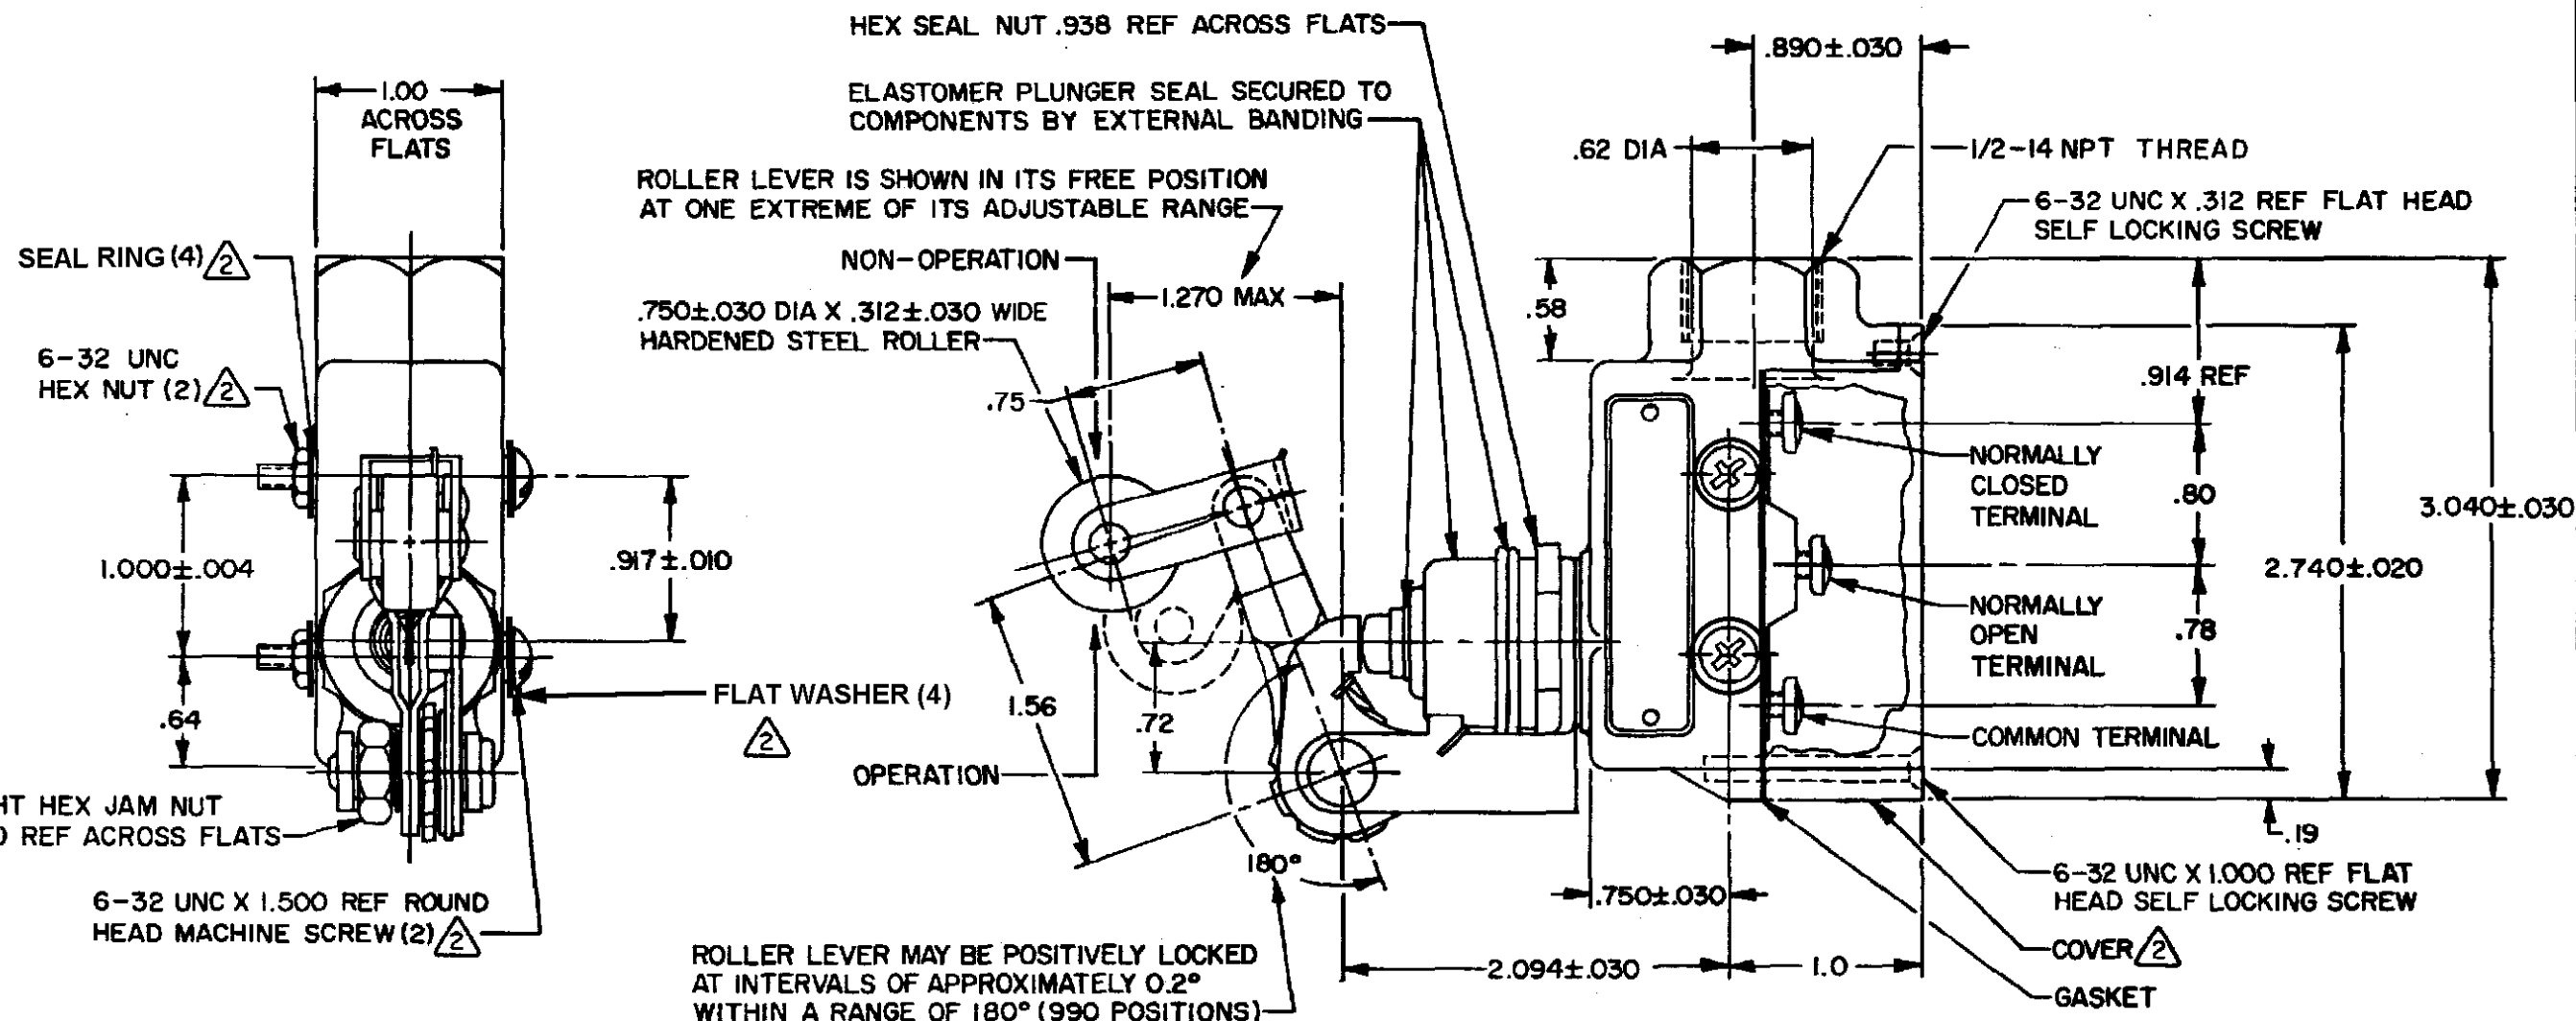

NOTES-

- 1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER(3) FURNISHED UNASSEMBLED
- 2 - ROLLER LEVER BRACKET ASSEMBLY MAY BE SET AT ANY POSITION AROUND AXIS OF PLUNGER
- 3 - SEAL RATING: NEMA 1,3 IP54

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE-----15-32 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE-----6 OZ MIN		UNLESS OTHERWISE NOTED
PRETRAVEL-----.234 MAX		DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL-----.006 MAX	15A-125, 250 OR 480 VAC, 2A-600 VAC	TOLERANCES ARE:
OVERTRAVEL-----.219 MIN	1/8 HP-125 VAC; 1/4 HP-250 VAC	ONE PLACE (.0) ±.030
BASIC SWITCH REPLACEMENT-----BZ-2RN702	1/2A-125 VDC; 1/4A-250 VDC	TWO PLACE (.00) ±.015
	CODE L74	THREE PLACE (.000) ±.005
	CE 1.5A, 240 Vac	ANGLES ±
		WEIGHT .71 LB

BZE6-2RN281

DRAWING NUMBER

ISSUE

9

REVISIONS

A	CO-38200	26 AUG 77
B	CO53191F	31 AUG 77
C	CO55989	31 APR 84
D	CO54958	NOV 84
E	CO72476	7 JAN 85
F	CO-77179A	4 SEP 92
G	0017057	17 FEB 94
H	VKR	22 NOV 05

FO-2851-A

DRAWN

S L B

REPLACES

22 NOV 05

BP

CHECK

77

31 AUG 77

31 APR 84

NOV 84

7 JAN 85

4 SEP 92

17 FEB 94

22 NOV 05

K P K

CHECK

77

26 AUG 77