

MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91928

SWITCH-ENCLOSED

CATALOG LISTING
BZE6-2RN37

M BZE6-2RN37

DRAWING
NUMBER

ISSUE

7

REVISIONS

A	0053191-G	C.J.H.	MAY 84
B	0055989	J.A.P.	NOV 84
C	0054958	J.A.P.	NOV 84
D	0072476	G.J.W.	JAN 85
E	0072476	MAM	4 SEP 92
F	0017057	V.K.R.	22 NOV 05

23 NOV 05

BP

18 NOV 80

CEB

CHECK

14 NOV 80

WJM

FO-92851-A


DRAWN

14 NOV 80

WJM

14 NOV 80

WJM

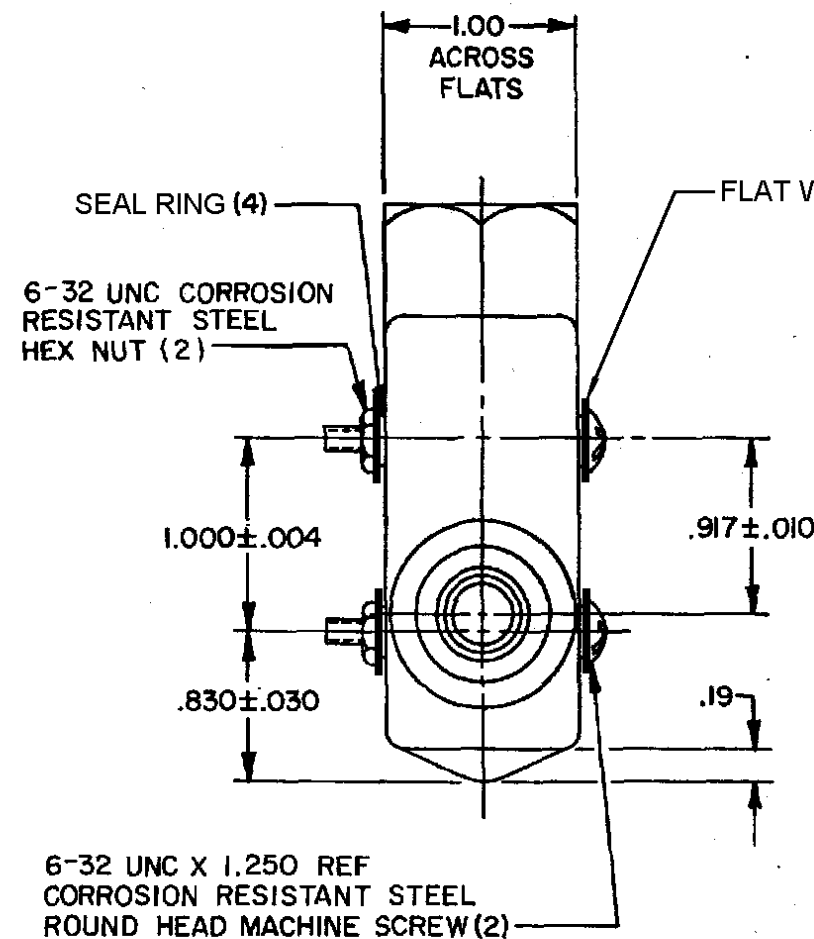


ELASTOMER PLUNGER SEAL SECURED
TO COMPONENTS BY EXTERNAL
BANDING

CORROSION RESISTANT
STEEL PLUNGER

.33 DIA

.47 SPHERICAL R

.078 MAX
PRETRAVEL

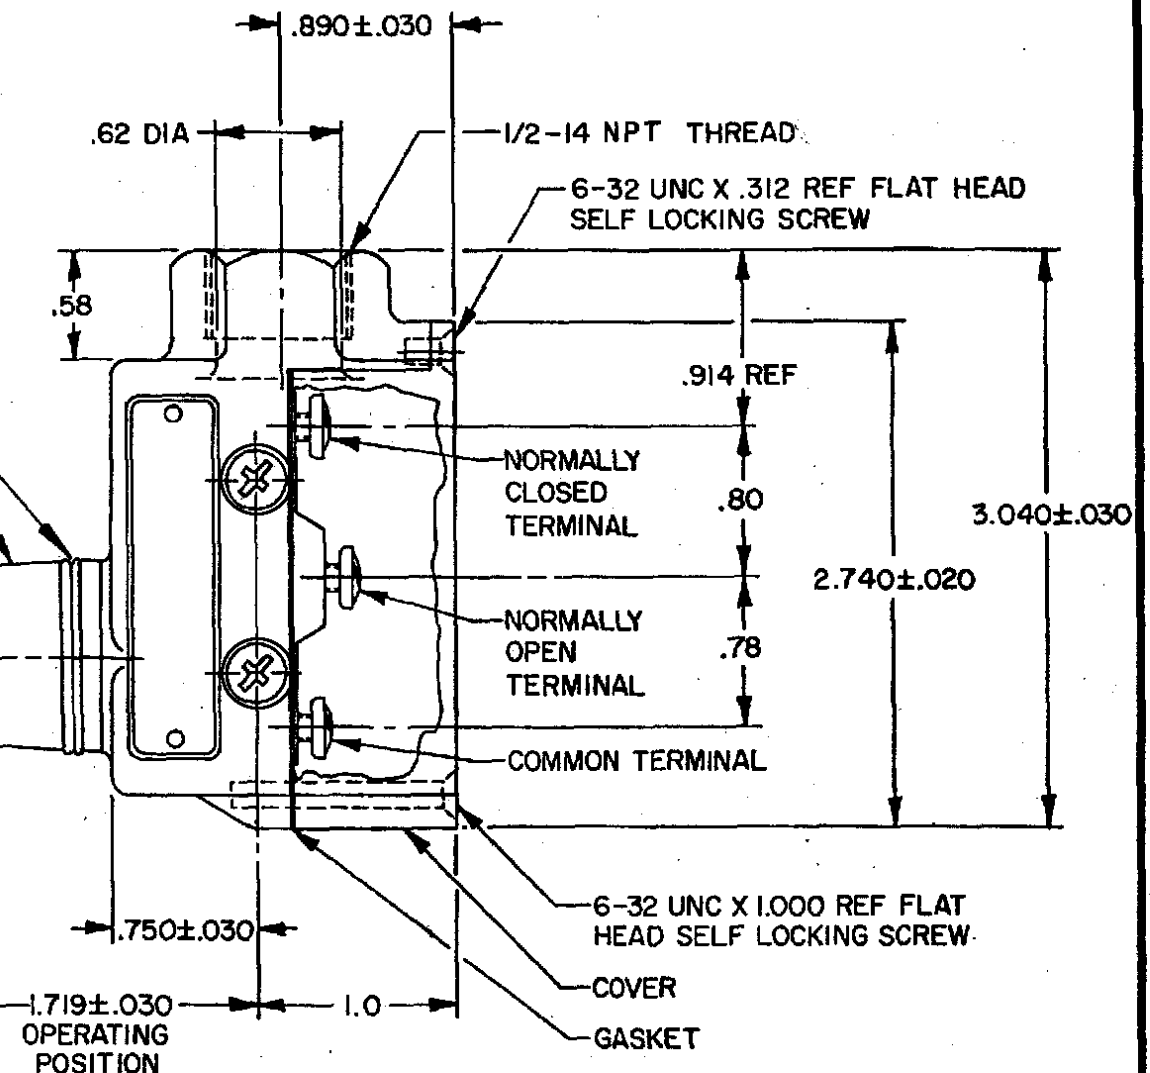

NOTE

- 1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3)
- 2 - SEAL RATING: NEMA 1,3
IP54

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 9-24 OZ

RELEASE FORCE ----- 4. OZ MIN

DIFFERENTIAL TRAVEL ----- .002 MAX

OVERTRAVEL ----- .219 MIN

BASIC SWITCH REPLACEMENT ----- BZ-2RN713

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

15A-125, 250 OR 480 VAC, 2A-600 VAC
1/8 HP-125 VAC; 1/4 HP-250 VAC
1/2 A-125 VDC; 1/4 A-250 VDC
CODE L74

CE 1.5A, 240 Vac

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES

WEIGHT .56 LB