

BZE6-2RN51

M

DRAWING
NUMBER

ISSUE

8

REPLACES

PR-9791

CHECK

BP

CHECK

BP

CHECK

BP

CHECK

BP

CHECK

BP

CHECK

BP

CHECK

BP

CHECK

BP

CHECK

BP

CHECK

BP

CHECK

BP

CHECK

BP

CHECK


BP

CHECK

BP

CHECK

BP

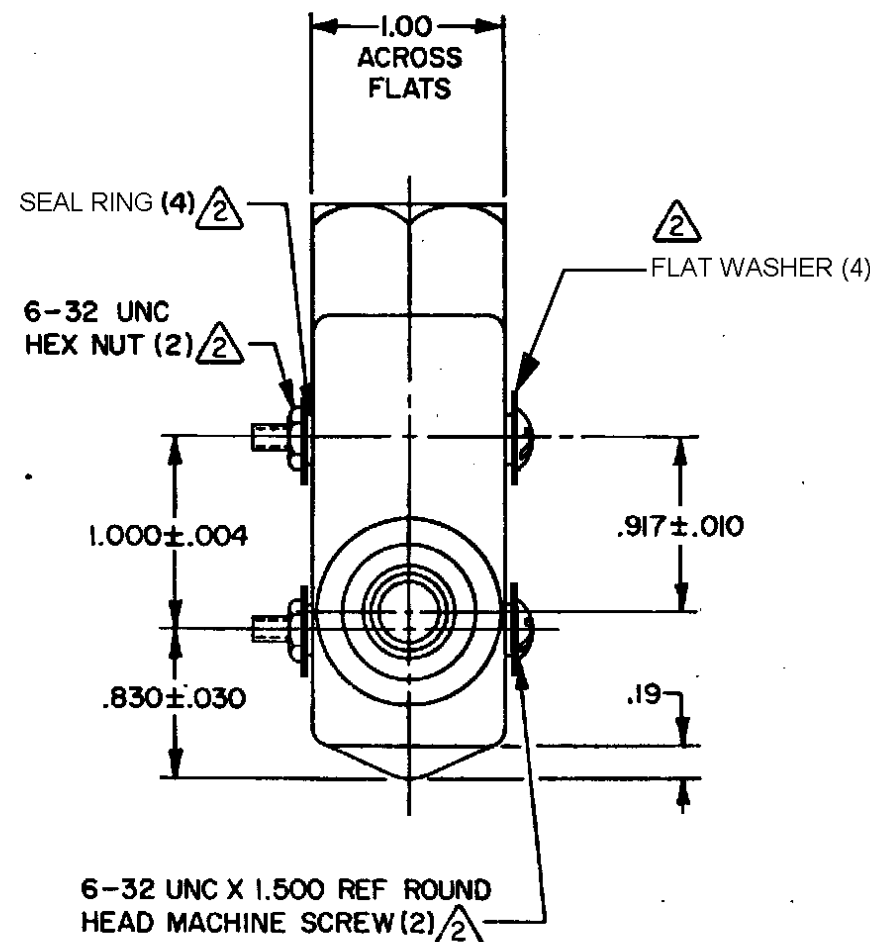

ELASTOMER PLUNGER SEAL SECURED TO
COMPONENTS BY EXTERNAL BANDING


HARDENED STEEL PLUNGER

.33 DIA

.47 SPHERICAL R

.078 MAX
PRETRAVEL

1.719±.030
OPERATING
POSITION

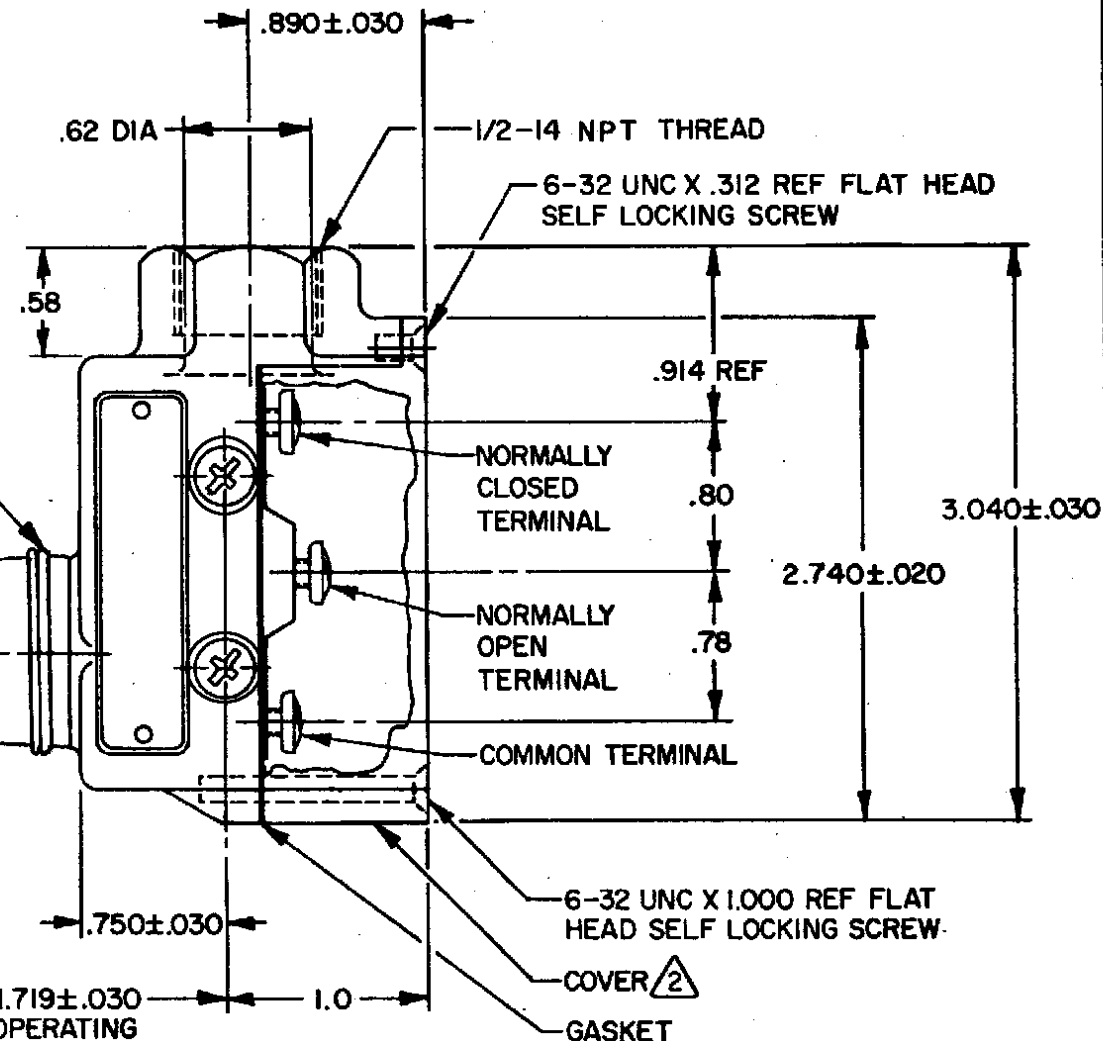

NOTES -

① - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3)
FURNISHED UNASSEMBLED

3 - SEAL RATING: NEMA1,3
IP54

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE — — — — 15 - 39 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE — — — — 10 OZ MIN	15A-125, 250 OR 480 VAC, 2A-600 VAC	UNLESS OTHERWISE NOTED
DIFFERENTIAL TRAVEL — — — .002 MAX	1/8 HP-125 VAC; 1/4 HP-250 VAC	DIMENSIONS ARE IN INCHES
OVERTRAVEL — — — — .219 MIN	1/2A-125 VDC; 1/4A-250 VDC	TOLERANCES ARE:
BASIC SWITCH REPLACEMENT — — BZ-2RQ77	CODE L74	ONE PLACE (.01) ±.030
	CE 1.5A, 240Vac	TWO PLACE (.00) ±.015
		THREE PLACE (.000) ±.005
		ANGLES
		WEIGHT: .56 LB