



FED. MFG. CODE 91929

CATALOG LISTING
BZE6-2RN8034

CATALOG LISTING

BZE6-2RN8034

RASTER FO-8285 I-A		DRAWN		CATALOG LISTING		M		BZE6-2RN8034		PAGE 1 OF 1		ISSUE		11		BP		22NOV05		RELEASE NO		REPLACES	
SLB		29 AUG 77		CHECK		K		P		K		P		K		P		K		P		K	
SLB		29 AUG 77		CHECK		K		P		K		P		K		P		K		P		K	
SLB		29 AUG 77		CHECK		K		P		K		P		K		P		K		P		K	
SLB		29 AUG 77		CHECK		K		P		K		P		K		P		K		P		K	
SLB		29 AUG 77		CHECK		K		P		K		P		K		P		K		P		K	
SLB		29 AUG 77		CHECK		K		P		K		P		K		P		K		P		K	
SLB		29 AUG 77		CHECK		K		P		K		P		K		P		K		P		K	
SLB		29 AUG 77		CHECK		K		P		K		P		K		P		K		P		K	
SLB		29 AUG 77		CHECK		K		P		K		P		K		P		K		P		K	
SLB		29 AUG 77		CHECK		K		P		K		P		K		P		K		P		K	
SLB		29 AUG 77		CHECK		K		P		K		P		K		P		K		P		K	
SLB		29 AUG 77		CHECK		K		P		K		P		K		P		K		P		K	
SLB		29 AUG 77		CHECK		K		P		K		P		K		P		K		P		K	
SLB		29 AUG 77		CHECK		K		P		K		P		K		P		K		P		K	
SLB		29 AUG 77		CHECK		K		P		K		P		K		P		K		P		K	
SLB		29 AUG 77		CHECK		K		P		K		P		K		P		K		P		K	
SLB		29 AUG 77		CHECK		K		P		K		P		K		P		K		P		K	
SLB		29 AUG 77		CHECK		K		P		K		P		K		P		K		P		K	
SLB		29 AUG 77		CHECK		K		P		K		P		K		P		K		P		K	
SLB		29 AUG 77		CHECK		K		P		K		P		K		P		K		P		K	
SLB		29 AUG 77		CHECK		K		P		K		P		K		P		K		P		K	
SLB		29 AUG 77		CHECK		K		P		K		P		K		P		K		P		K	
SLB		29 AUG 77		CHECK		K		P		K		P		K		P		K		P		K	
SLB		29 AUG 77		CHECK		K		P		K		P		K		P		K		P		K	
SLB		29 AUG 77		CHECK		K		P		K		P		K		P		K		P		K	
SLB		29 AUG 77		CHECK		K		P		K		P		K		P		K		P		K	
SLB		29 AUG 77		CHECK		K		P		K		P		K		P		K		P		K	
SLB		29 AUG 77		CHECK		K		P		K		P		K		P		K		P		K	
SLB		29 AUG 77		CHECK		K		P		K		P		K		P		K		P		K	
SLB		29 AUG 77		CHECK		K		P		K</													

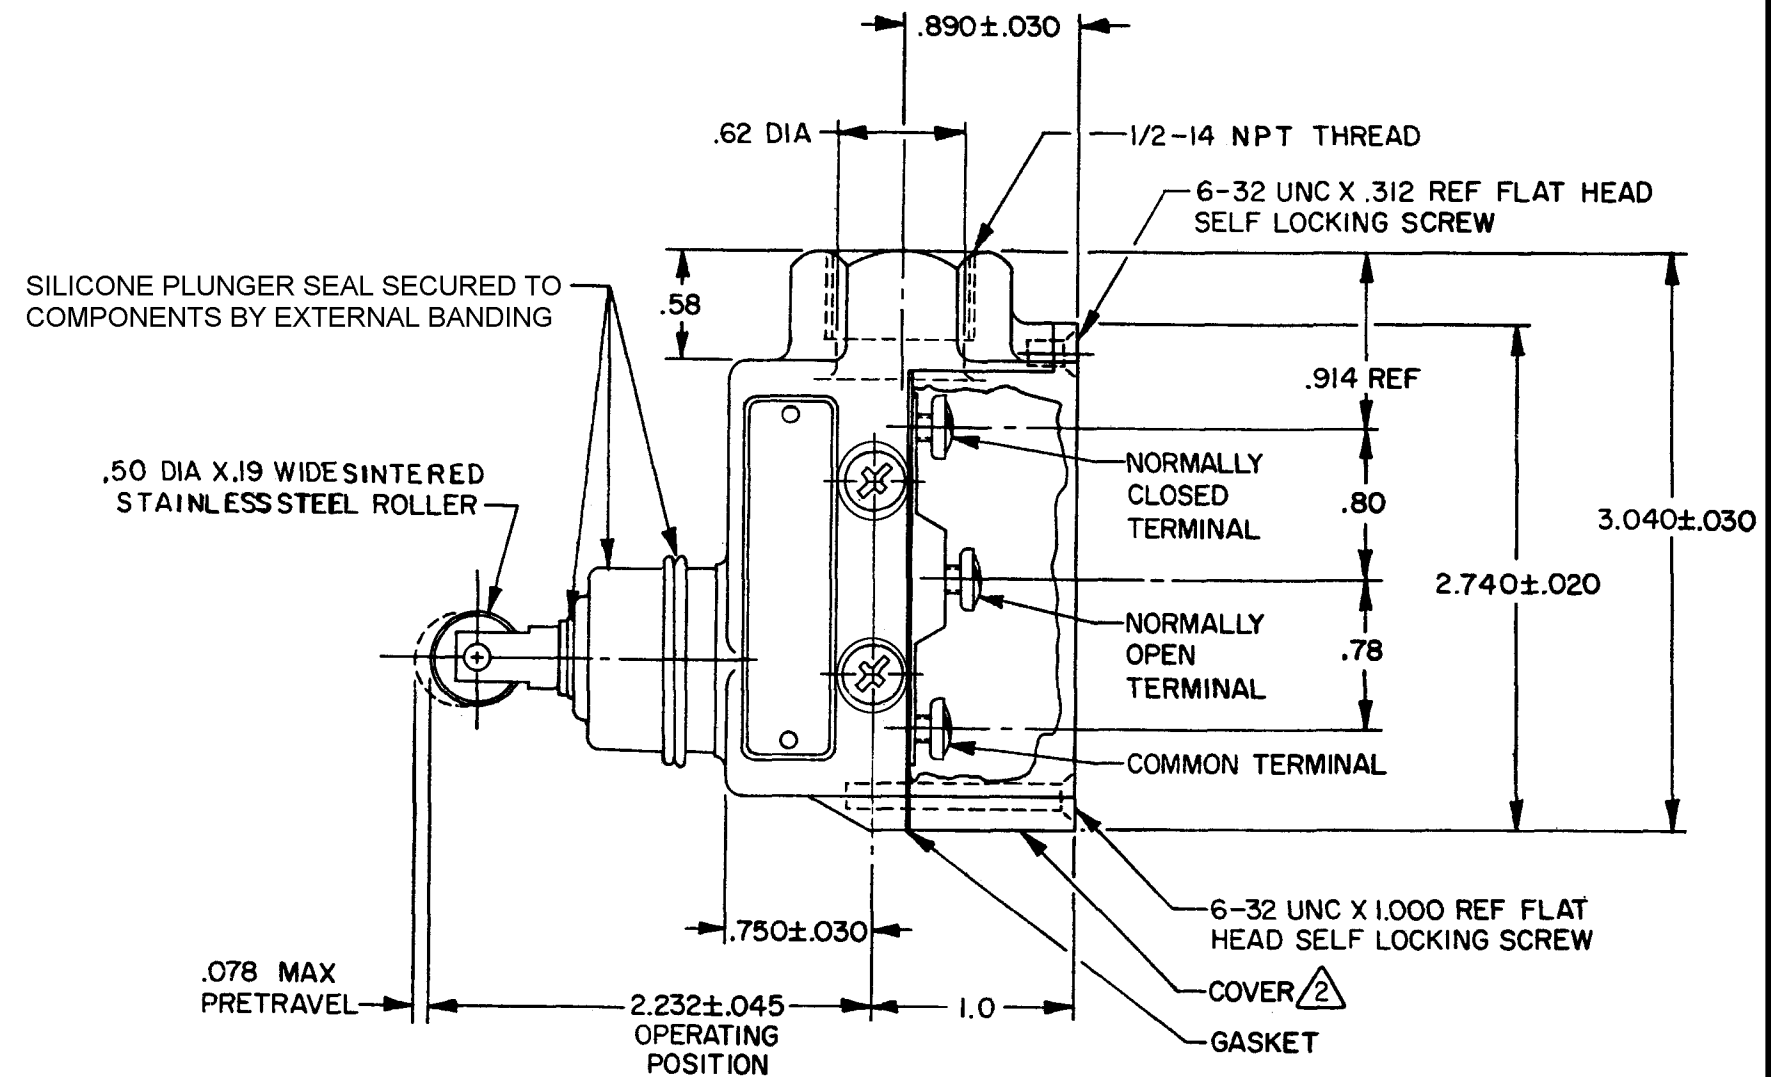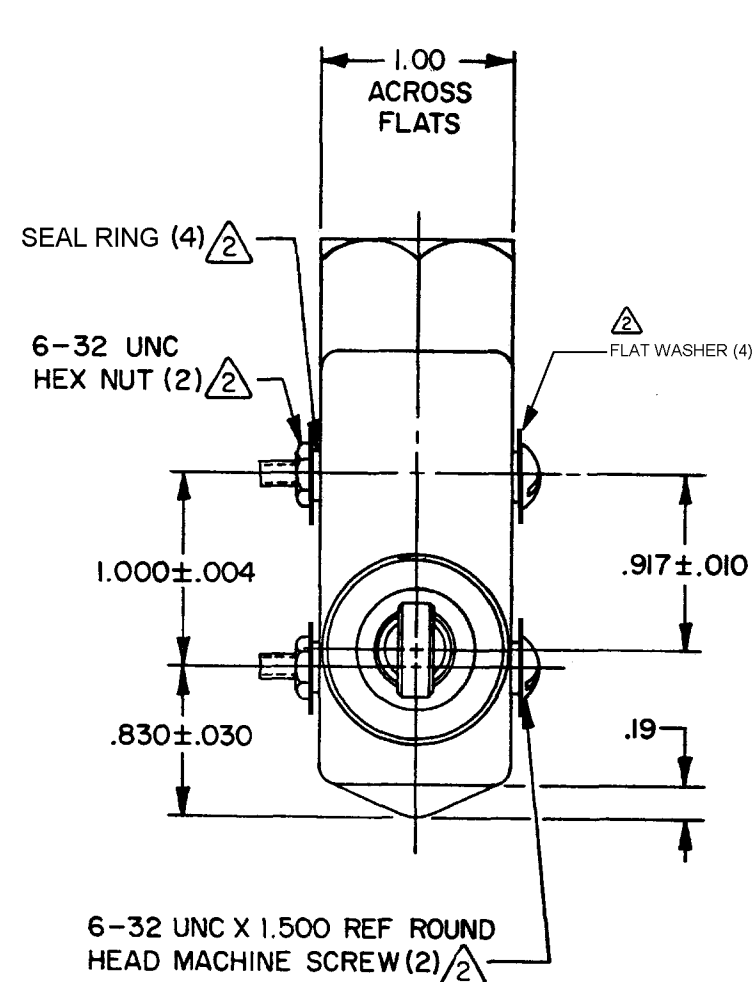

1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3)
 2 - FURNISHED UNASSEMBLED
 3 - TEMPERATURE RANGE: -40° F TO +160° F (-40° C TO +71° C)
 4 - SEAL RATING: NEMA1,3
 IP54

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		
CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE-----15-39 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE-----10 OZ MIN	15A-125, <u>250</u> OK 480 VAC, 2A-600 VAC 1/8 HP-125 VAC; 1/4 HP- <u>250</u> VAC 1/2A-125 VDC; 1/4A-250 <u>VDC</u> CODE L74 SP RL	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL-----.0004-.0020		TOLERANCES ARE
OVERTRAVEL-----.219 MIN	CE 1.5A, 240Vac	ONE PLACE (.01) $\pm .03$ TWO PLACE (.00) $\pm .01$ THREE PLACE (.000) $\pm .00$ ANGLES $\pm$
		WEIGHT .56 LB APPROX