


**MICRO SWITCH**  
 FREEPORT, ILLINOIS, U.S.A.  
 A DIVISION OF HONEYWELL  
 FED. MFG. CODE 91929

**SWITCH-ENCLOSED**

CATALOG LISTING  
**BZE6-2RQ219**

RASTER  
 FO-5285 1-A  
 DRAWN  
 S L B  
 12 SEPT 77  
 CHECK  
 K P K  
 14 SEP 77  
 BS  
 29 AUG 07  
 G 0033014  
 KRB  
 10 NOV 05  
 F 0016894  
 L J F  
 26 SEP 92  
 E C072618  
 TSK  
 26 FEB 85  
 D C054958  
 C J H  
 8 NOV 84  
 C C055989  
 C J H  
 MAY 84  
 B C053194-G  
 12 SEPT 77  
 S L B  
 38200  
 A CO-  
 REVISIONS  
 ISSUE  
 3  
 9  
 DRAWING  
 NUMBER  
 M  
 BZE6-2RQ219  
 REPLACES  
 PSR 29 AUG 07  
 RELEASE NO.

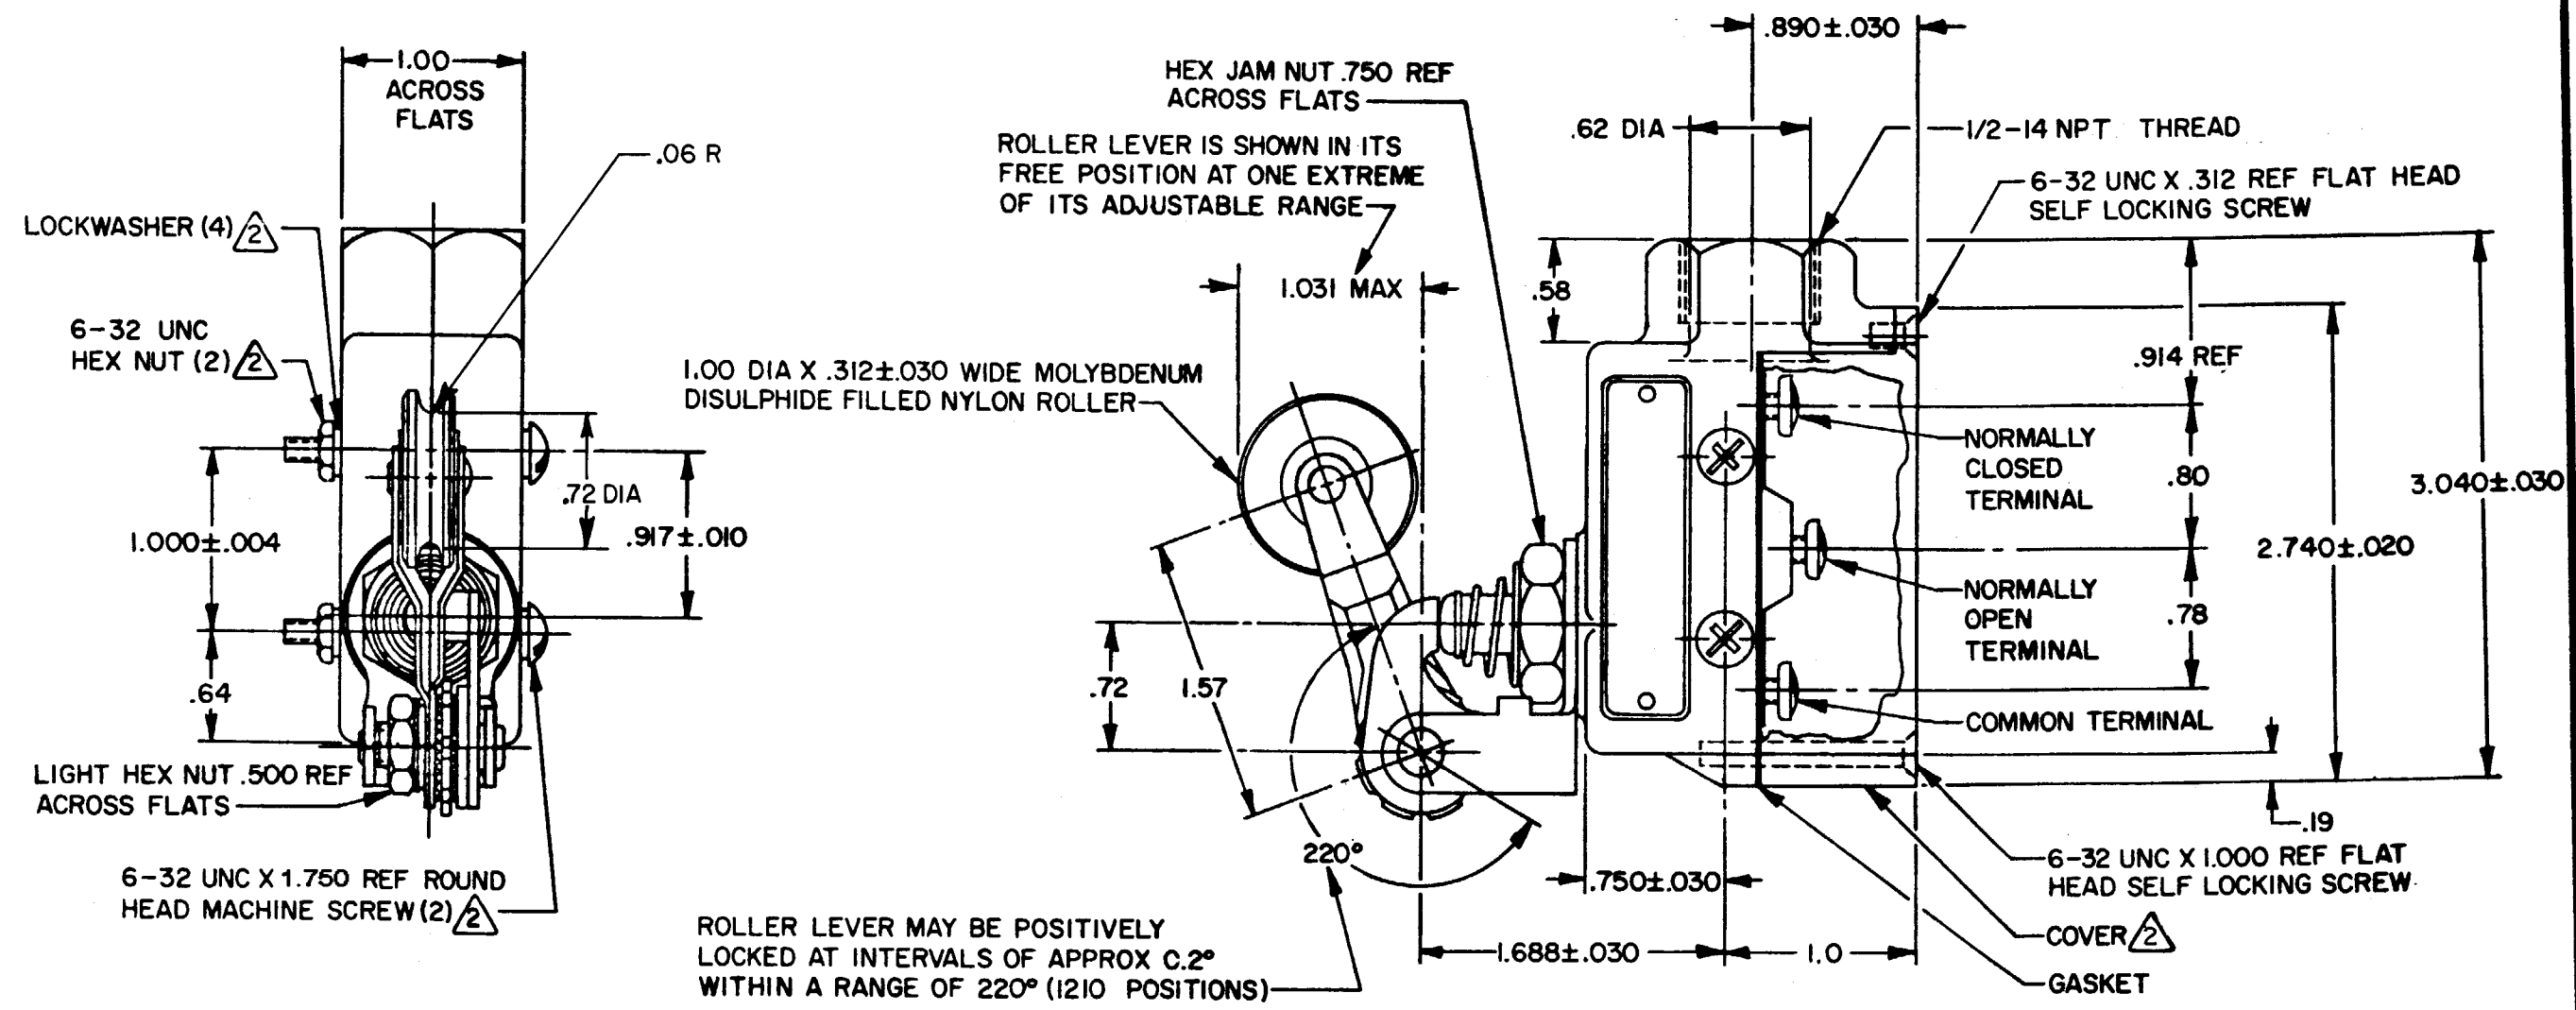

**NOTES-**

- 1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3)
- (2) FURNISHED UNASSEMBLED
- 3 - ROLLER LEVER BRACKET ASSEMBLY MAY BE SET AT ANY ONE OF EIGHT POSITIONS SPACED 45° APART
- 4 - SEAL RATING: NEMA1  
IP40

| THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH. |                                     |                           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|---------------------------|
| CHARACTERISTICS                                                                                                                                                                     | ELECTRICAL DATA                     | SCALE FULL                |
| OPERATING FORCE ————— 10-18 OZ                                                                                                                                                      | CONTACT ARRANGEMENT<br>S P D T      | DO NOT SCALE PRINT        |
| RELEASE FORCE ————— 6 OZ MIN                                                                                                                                                        | 15A-125, 250 OR 480 VAC, 2A-600 VAC | UNLESS OTHERWISE NOTED    |
| PRETRAVEL ————— .188 MAX                                                                                                                                                            | 1/8 HP-125 VAC; 1/4 HP-250 VAC      | DIMENSIONS ARE IN INCHES  |
| DIFFERENTIAL TRAVEL ————— .006 MAX                                                                                                                                                  | 1/2A-125 VDC; 1/4A-250 VDC          | <b>TOLERANCES ARE:</b>    |
| OVERTRAVEL ————— .219 MIN                                                                                                                                                           | CODE L74                            | ONE PLACE (.0) ± .030     |
| BASIC SWITCH REPLACEMENT ——— BZ-2RQ68                                                                                                                                               | CE 1.5A, 240 Vac                    | TWO PLACE (.00) ± .015    |
|                                                                                                                                                                                     |                                     | THREE PLACE (.000) ± .006 |
|                                                                                                                                                                                     |                                     | ANGLES                    |
|                                                                                                                                                                                     |                                     | WEIGHT .70 LB             |