

BZE6-2RQ4

M

DRAWING
NUMBER

ISSUE
13
8

REPLACES

RELEASE NO.

29AUG07

PSR

CHECK

77

14 SEP 77

14 SEP 77

14 SEP 77

14 SEP 77

14 SEP 77

14 SEP 77


14 SEP 77

14 SEP 77

14 SEP 77

14 SEP 77


14 SEP 77

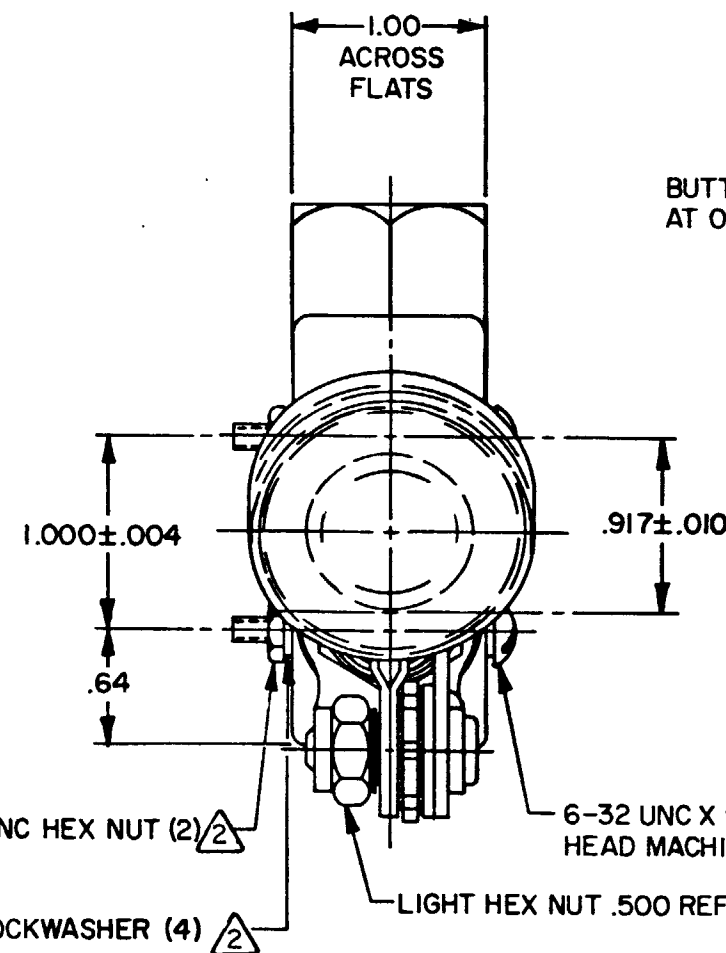


BUTTON LEVER IS SHOWN IN ITS FREE POSITION
AT ONE EXTREME OF ITS ADJUSTABLE RANGE

HEX JAM NUT .750 REF ACROSS FLATS

POINT "A"

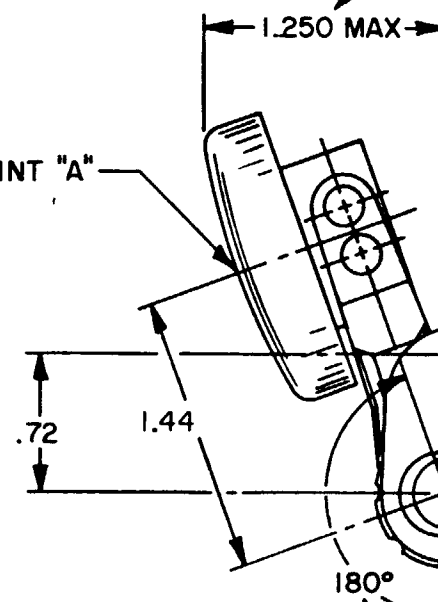

BUTTON LEVER MAY BE POSITIVELY LOCKED
AT INTERVALS OF APPROXIMATELY 0.2° WITHIN
A RANGE OF 180° (90° POSITION)

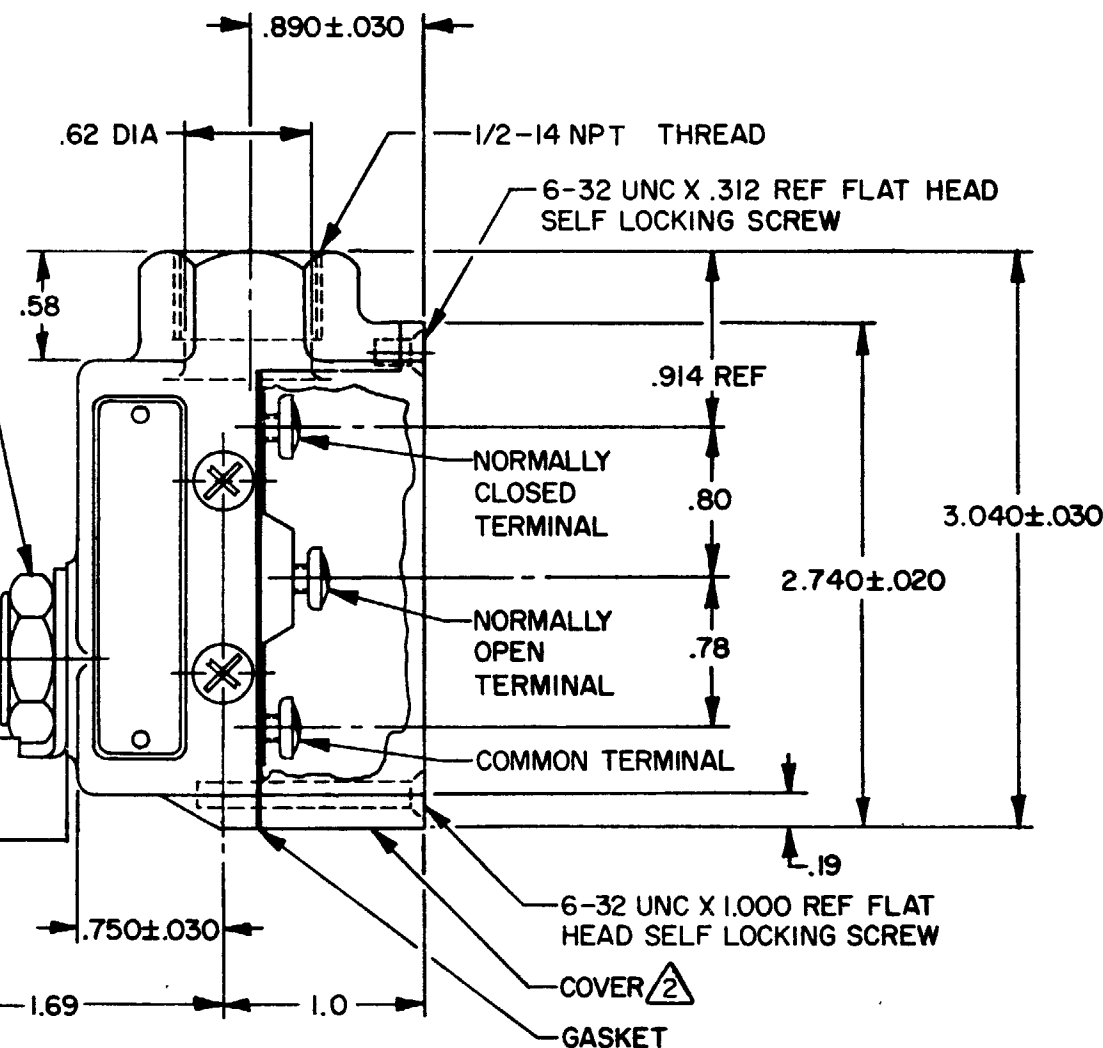

NOTES-

- 1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3)
- 2 - FURNISHED UNASSEMBLED
- 3 - BUTTON LEVER BRACKET ASSEMBLY MAY BE SET AT ANY ONE OF EIGHT POSITIONS SPACED 45° APART
- 4 - SEAL RATING: NEMA1 IP40

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS AT POINT "A"	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE - - - - - 10-18 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE - - - - - 6 OZ MIN	15A-125, 250 OR 480 VAC, 2A-600 VAC 1/8 HP-125 VAC; 1/4 HP-250 VAC 1/2A-125 VDC; 1/4A-250 VDC CODE L74	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL-.006 MAX(1/4° MAX)	CE 1.5A, 240 Vac	TOLERANCES ARE:
OVERTRAVEL - - - - -.219 MIN(9° MIN)		ONE PLACE (.0) ±.030
BASIC SWITCH REPLACEMENT - - - BZ-2RQ68		TWO PLACE (.00) ±.015
		THREE PLACE (.000) ±.005
		ANGLES
		WEIGHT .73LB

RASTER
FO-52851-A

DRAWN

SLB

12 SEP 77