

MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91529

SWITCH - ENCLOSED

CATALOG LISTING
BZE6-2RQ62-S

BZE6-2RQ62-S

M

DRAWING
NUMBER

6

ISSUE

REPLACES

RELEASE NO. PR-16823

PSR 29AUG07

CHECK

31OCT06

VA

CHECK

19 OCT 88

MAM

CHECK

17 OCT 88



BGS

REVISIONS

A	0072618
11	SEP 92
B	0077869
20	SEP 94
C	0025985
31	OCT 06
D	0033014
29	AUG 07

RASTER
FO-8285 1-A

DRAWN

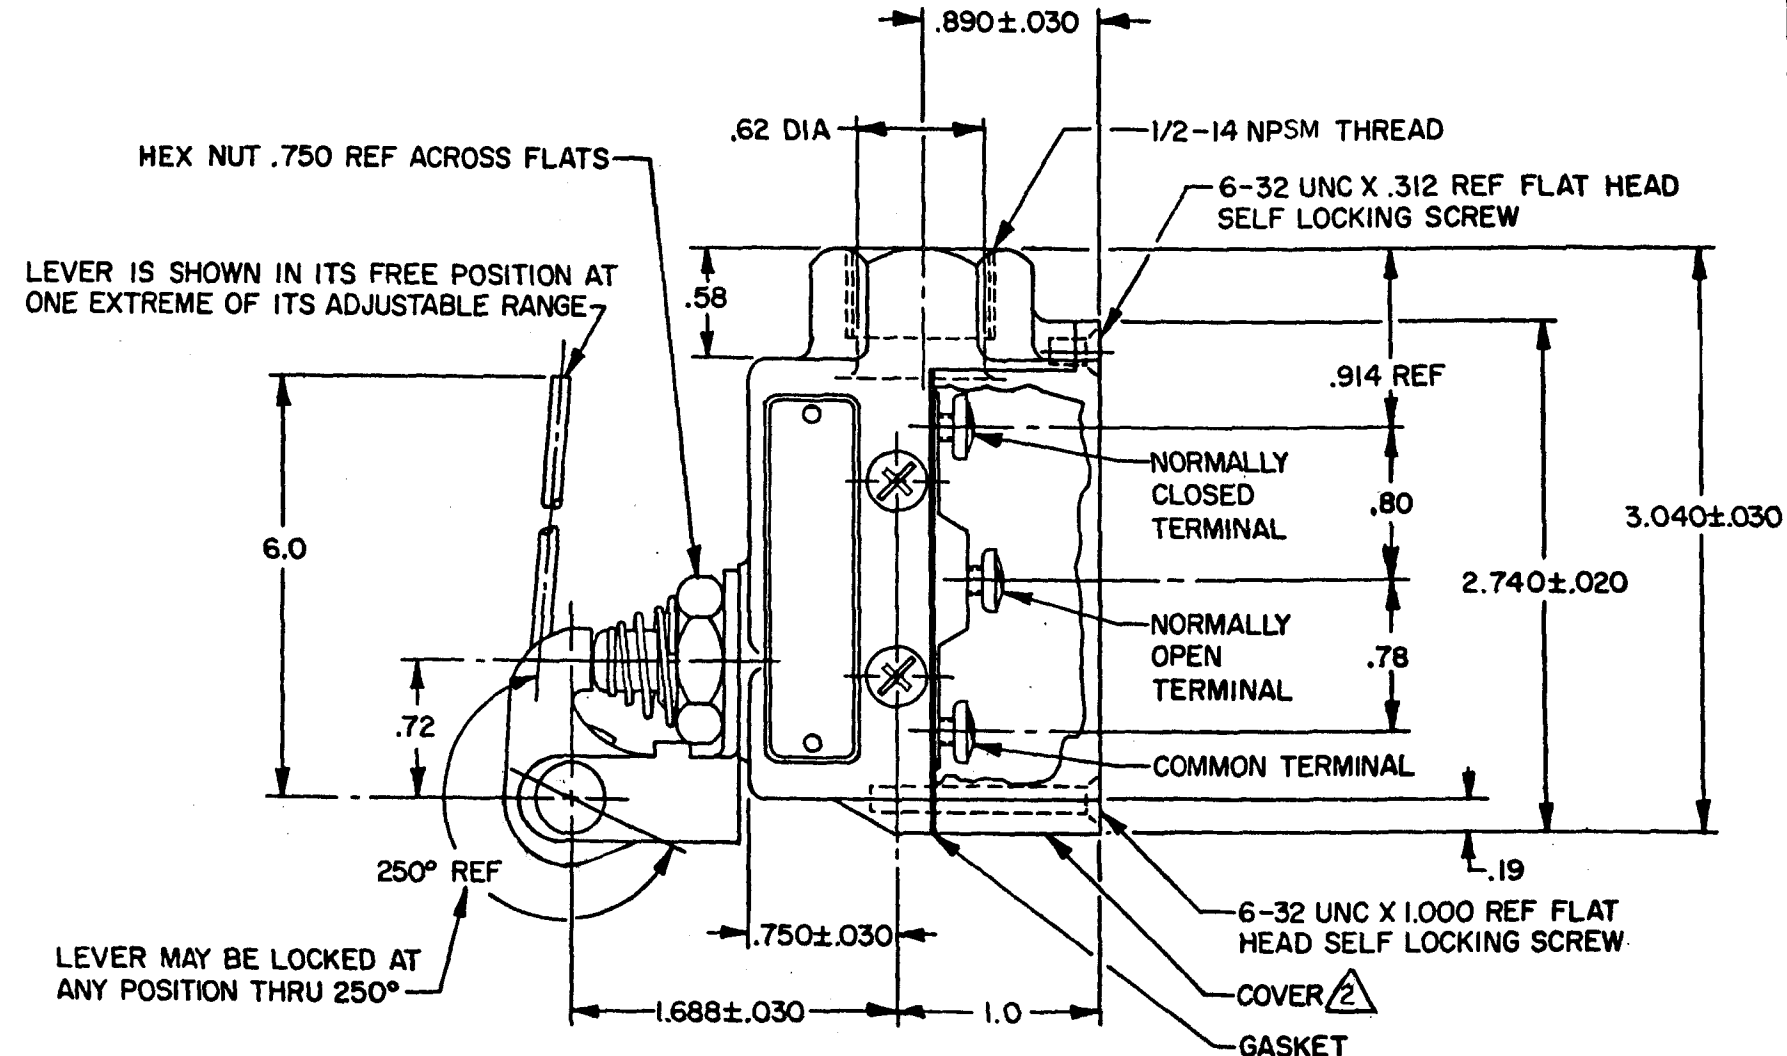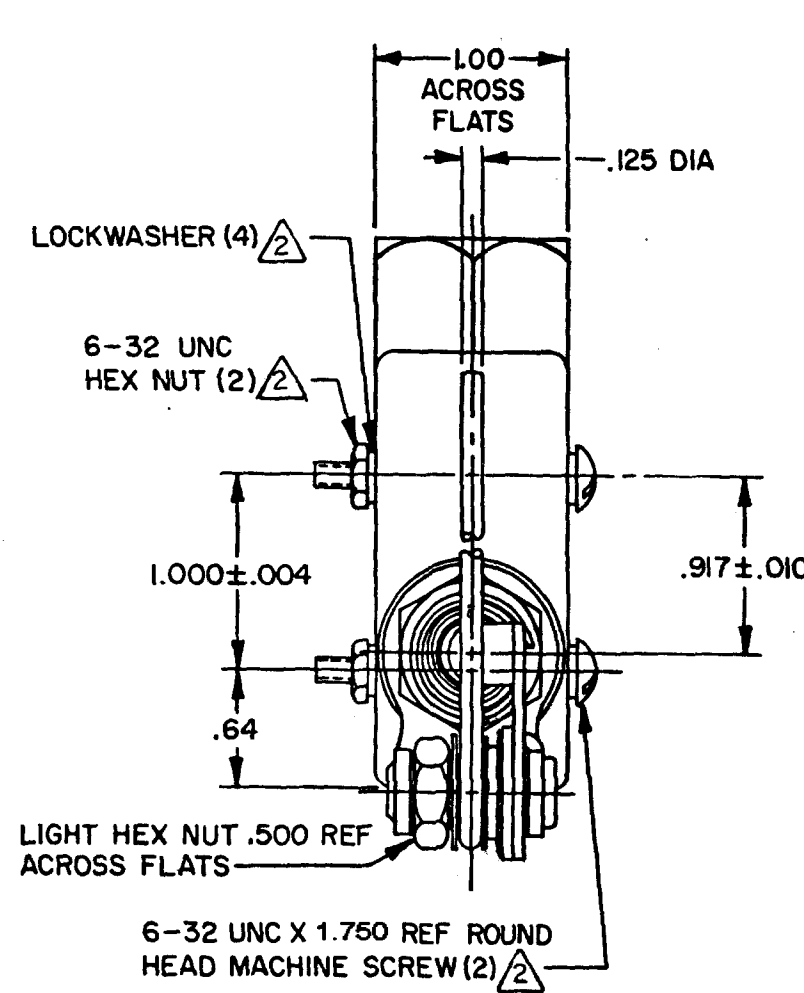

NOTES -

- 1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3)
- 2 - FURNISHED UNASSEMBLED
- 3 - LEVER BRACKET ASSEMBLY MAY BE SET AT ANY ONE OF EIGHT POSITIONS SPACED 45° APART
- 4 - SEAL RATING: NEMA 1
IP40

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE — 2-5 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE — 2 OZ MIN	L74	UNLESS OTHERWISE NOTED
PRETRAVEL — .718 MAX	15A-125, 250, OR 480VAC 2A-600 VAC	DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL — .229 MAX	1/8 HP-125 VAC, 1/4 HP-250 VAC	TOLERANCES ARE:
OVERTRAVEL — .838 MIN	1/2A-125 VDC, 1/4A-250 VDC	ONE PLACE (.0) ±.030
BASIC SWITCH REPLACEMENT — BZ-2RQ68	CE 1.5A, 240Vac	TWO PLACE (.00) ±.015
		THREE PLACE (.000) ±.005
		ANGLES ±
		WEIGHT .70 LB