

MICRO SWITCH
FREEPORT, ILLINOIS, U S A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
BZE6-2RQ81-S

BZE6-2RQ81-S

M

DRAWING
NUMBER

ISSUE

4

5

PSR

29AUG07

CHECK

REVISIONS

A PR-14307

MAM

4 NOV 85

B C072618

LJF

11 SEP 92

C 0016894

KRB

10 NOV 05

D 0033014

BS

29AUG07

CHECK

8 NOV 85

GA

CHECK

4 NOV 85

CHECK

4 NOV 85

CHECK

4 NOV 85

CHECK

4 NOV 85

CHECK

4 NOV 85

CHECK

RASTER
FO-52851-A
DRAWN

REPLACES

PR-14307

29AUG07

PSR

29AUG07

CHECK

8 NOV 85

GA

CHECK

4 NOV 85

CHECK

4 NOV 85

CHECK

4 NOV 85

CHECK

4 NOV 85

CHECK

4 NOV 85

CHECK

4 NOV 85

CHECK

4 NOV 85

CHECK

4 NOV 85

CHECK

4 NOV 85

CHECK

4 NOV 85

CHECK

4 NOV 85

CHECK

4 NOV 85

CHECK

4 NOV 85

CHECK

4 NOV 85

CHECK

4 NOV 85

CHECK

4 NOV 85



CHECK

4 NOV 85

CHECK

4 NOV 85

CHECK

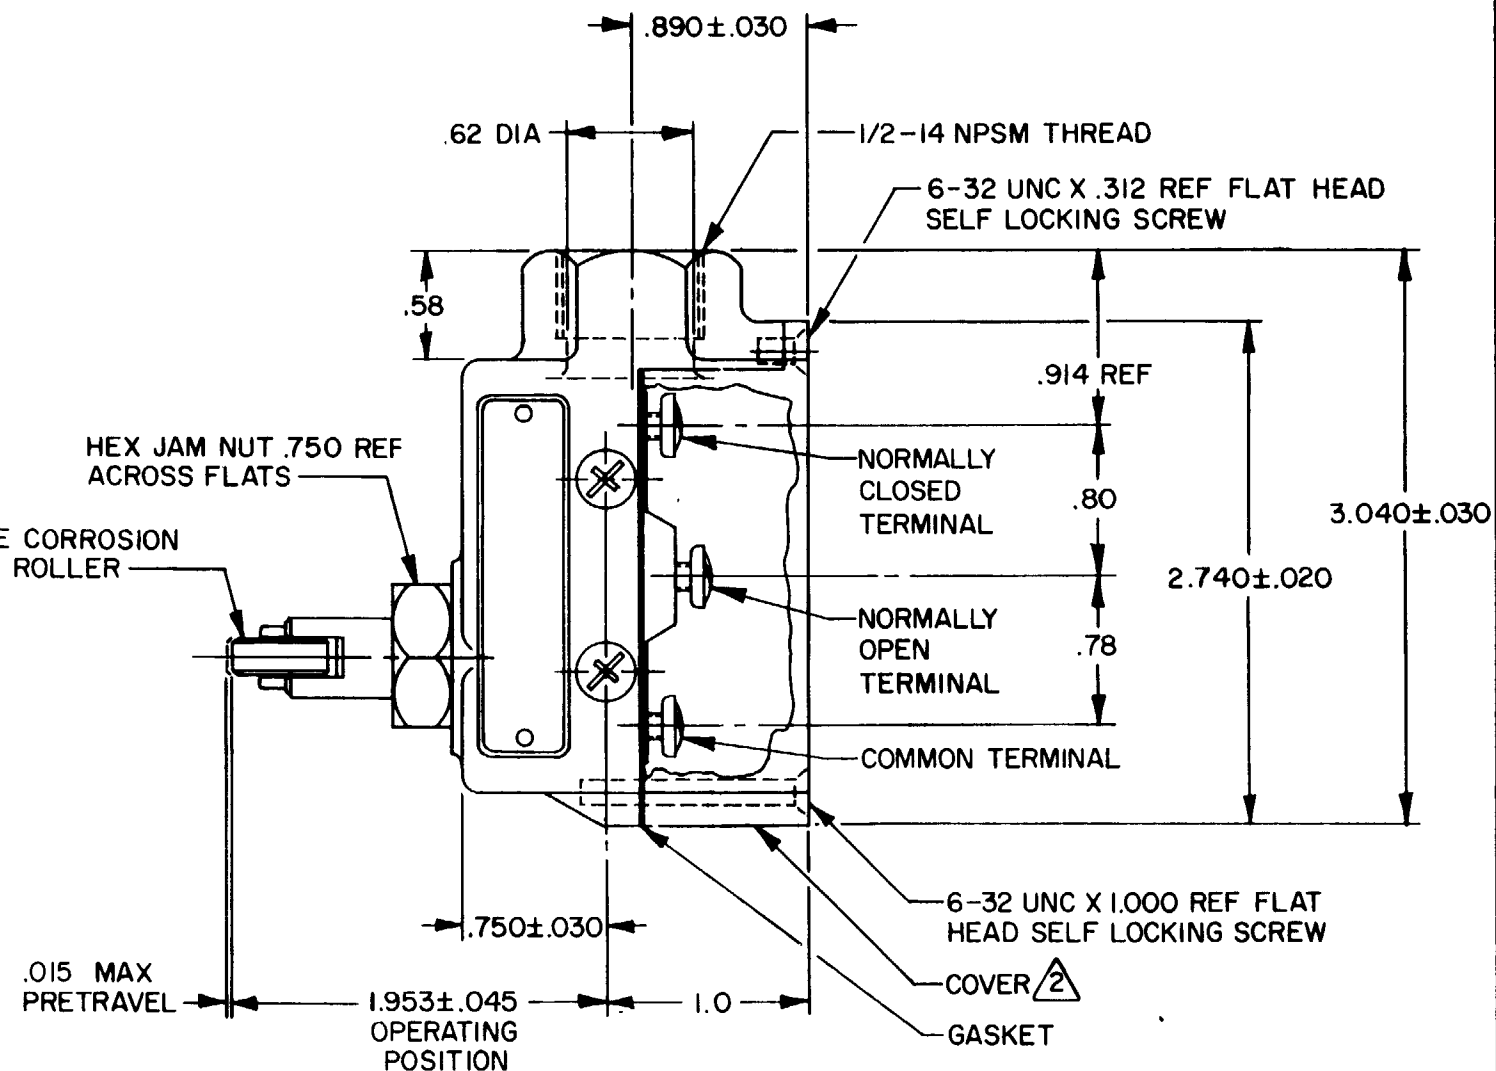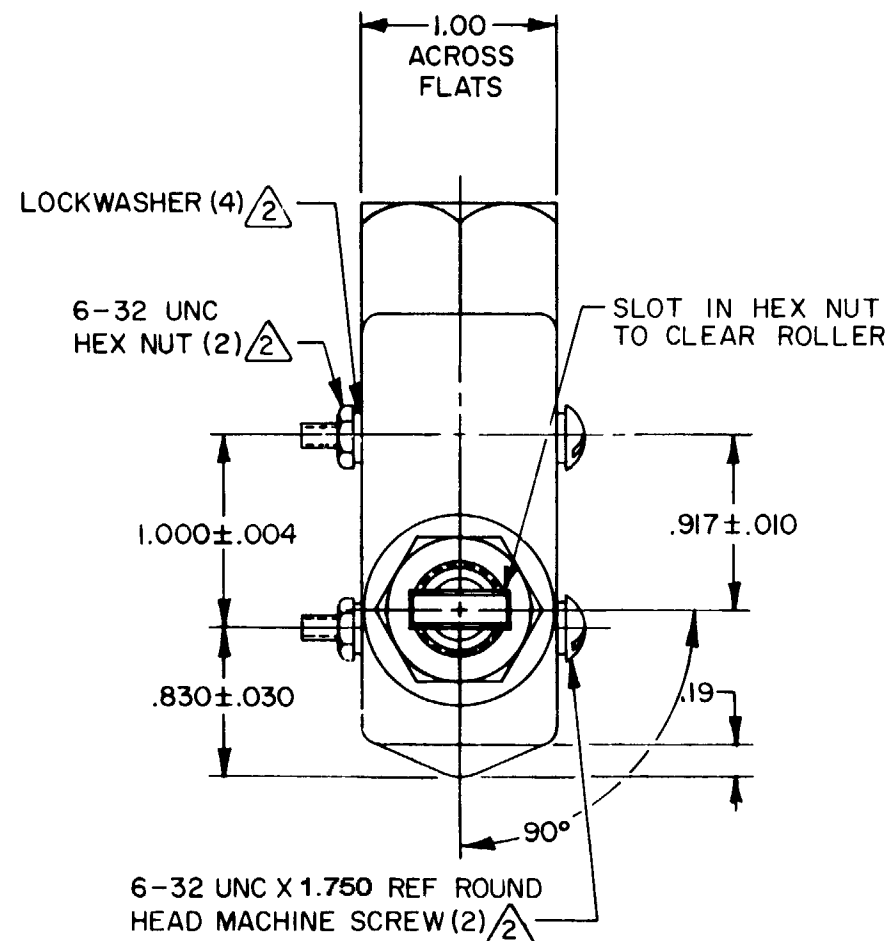

NOTES -

- 1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3)
- 2 - FURNISHED UNASSEMBLED
- 3 - SEAL RATING: NEMA1 IP40

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE - - - - - 9 - 13 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE - - - - - 4 OZ MIN	15A-125, 250 OR 480 VAC, 2A-600 VAC 1/8 HP-125 VAC; 1/4 HP-250 VAC 1/2A-125 VDC; 1/4A-250 VDC CODE L74	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL - - - - .002 MAX	CE 1.5A, 240 Vac	TOLERANCES ARE: ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES
OVERTRAVEL - - - - - .140 MIN		WEIGHT .56 LB
BASIC SWITCH REPLACEMENT - - - BZ-2RQ785		