

MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
BZE6-2RQ814

BZE6-2RQ814

M
DRAWING
NUMBER

ISSUE
9
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

REVISIONS

A	CO-1	28200
B	SLB	18 SEPT 77
C	CO5319IF	13 APR 84
D	CO55989	8 NOV 84
E	CO54958	26 FEB 85
F	CO68055	9 AUG 90
G	CO72618	11 SEP 92
H	CO016894	10 NOV 05
I	CO033014	29 AUG 07

RASTER
FO-5285 1-A

REPLACES

RELEASE NO.

29AUG07

PSR

CHECK

77

23 SEP

ROB

CHECK



77

23 SEP

CHECK

77

19 SEPT

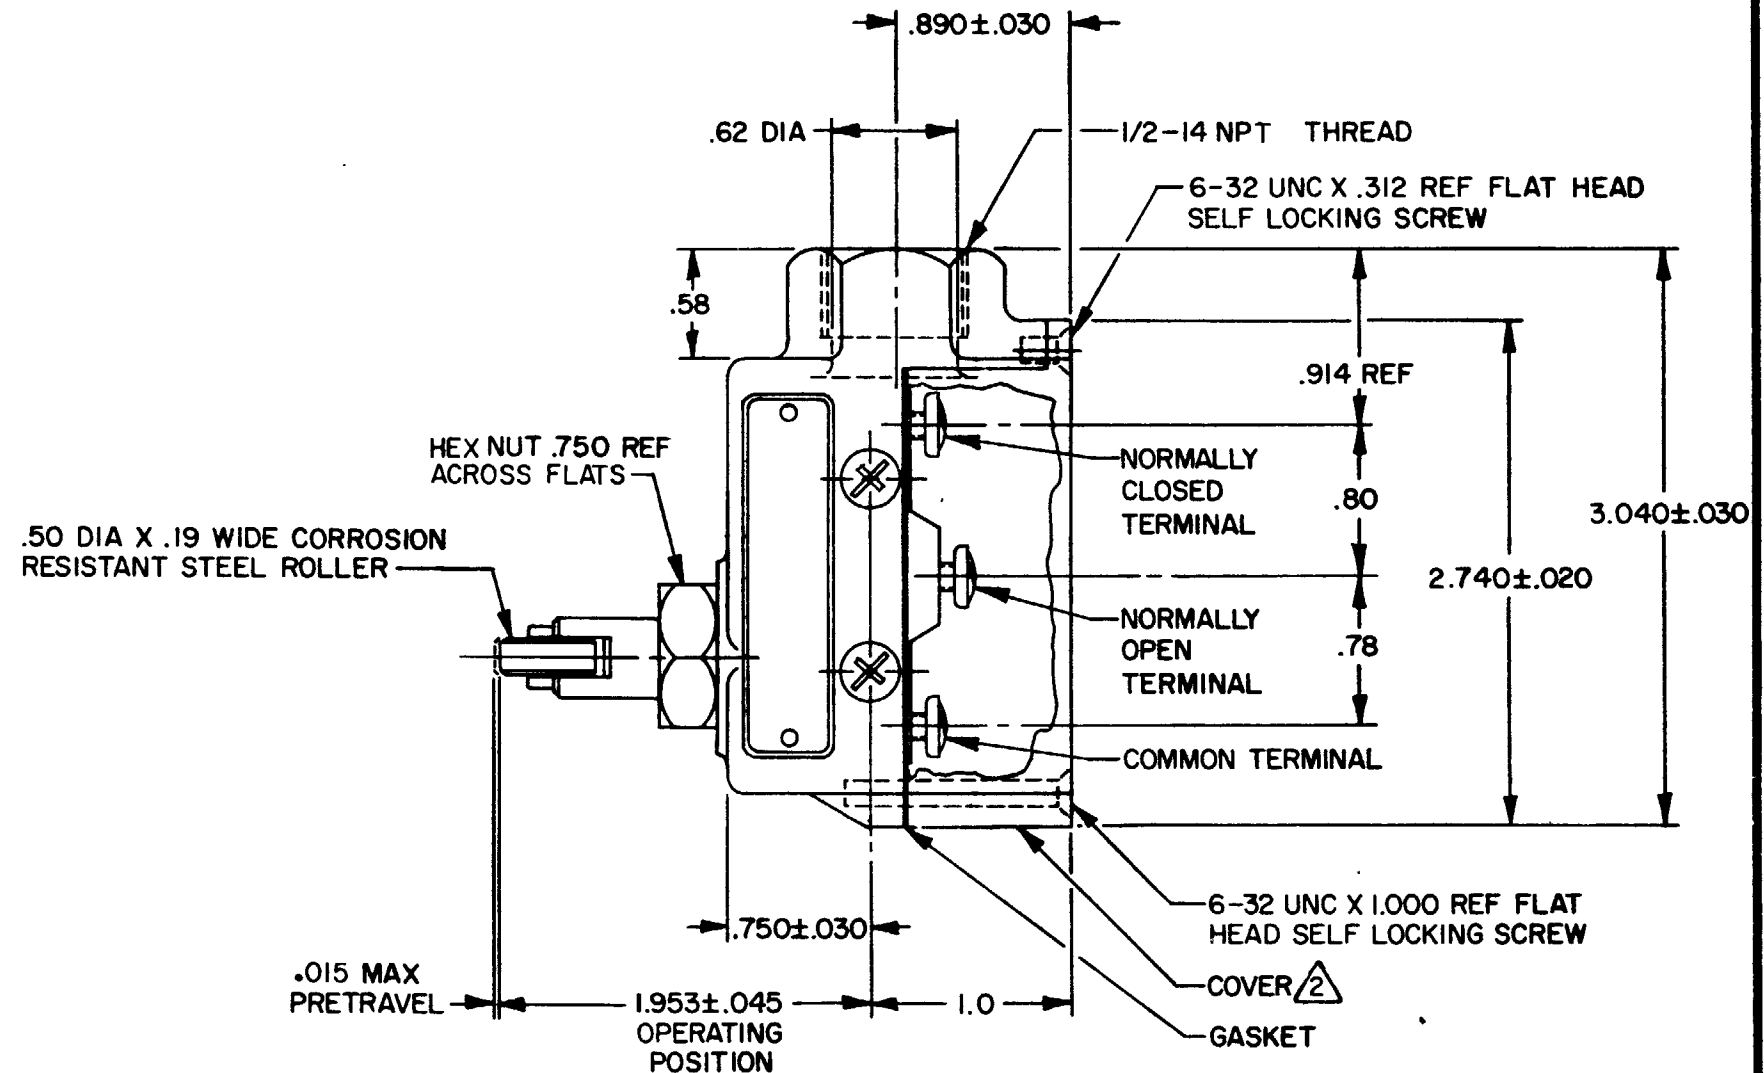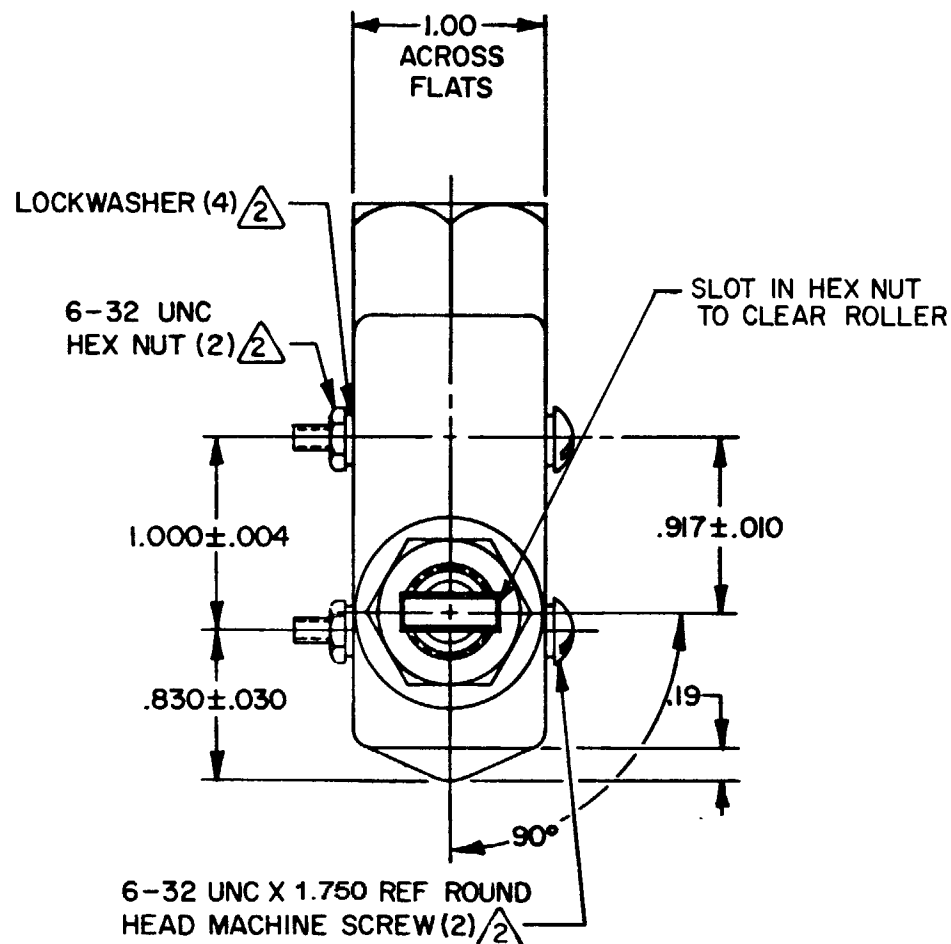

NOTES-

- 1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3)
2 - FURNISHED UNASSEMBLED
3 - SEAL RATING: NEMA 1
IP40

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE - - - - - 25-40 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE - - - - - 10 OZ MIN		UNLESS OTHERWISE NOTED
DIFFERENTIAL TRAVEL - - - - - .002 MAX	CODE L35	DIMENSIONS ARE IN INCHES
OVERTRAVEL - - - - - .140 MIN	5A-125, 250 OR 480 VAC	TOLERANCES ARE:
BASIC SWITCH REPLACEMENT - - - - - BZ-2RQ780	1/2A-125 VDC, 1/4A-250 VDC	ONE PLACE (.0) ±.030
	CE 1.5A, 240 Vac SP	TWO PLACE (.00) ±.015
		THREE PLACE (.000) ±.005
		ANGLES
		WEIGHT .56 LB