MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH – ENCLOSED

CATALOG LISTING
BZE6–2RQ9–S

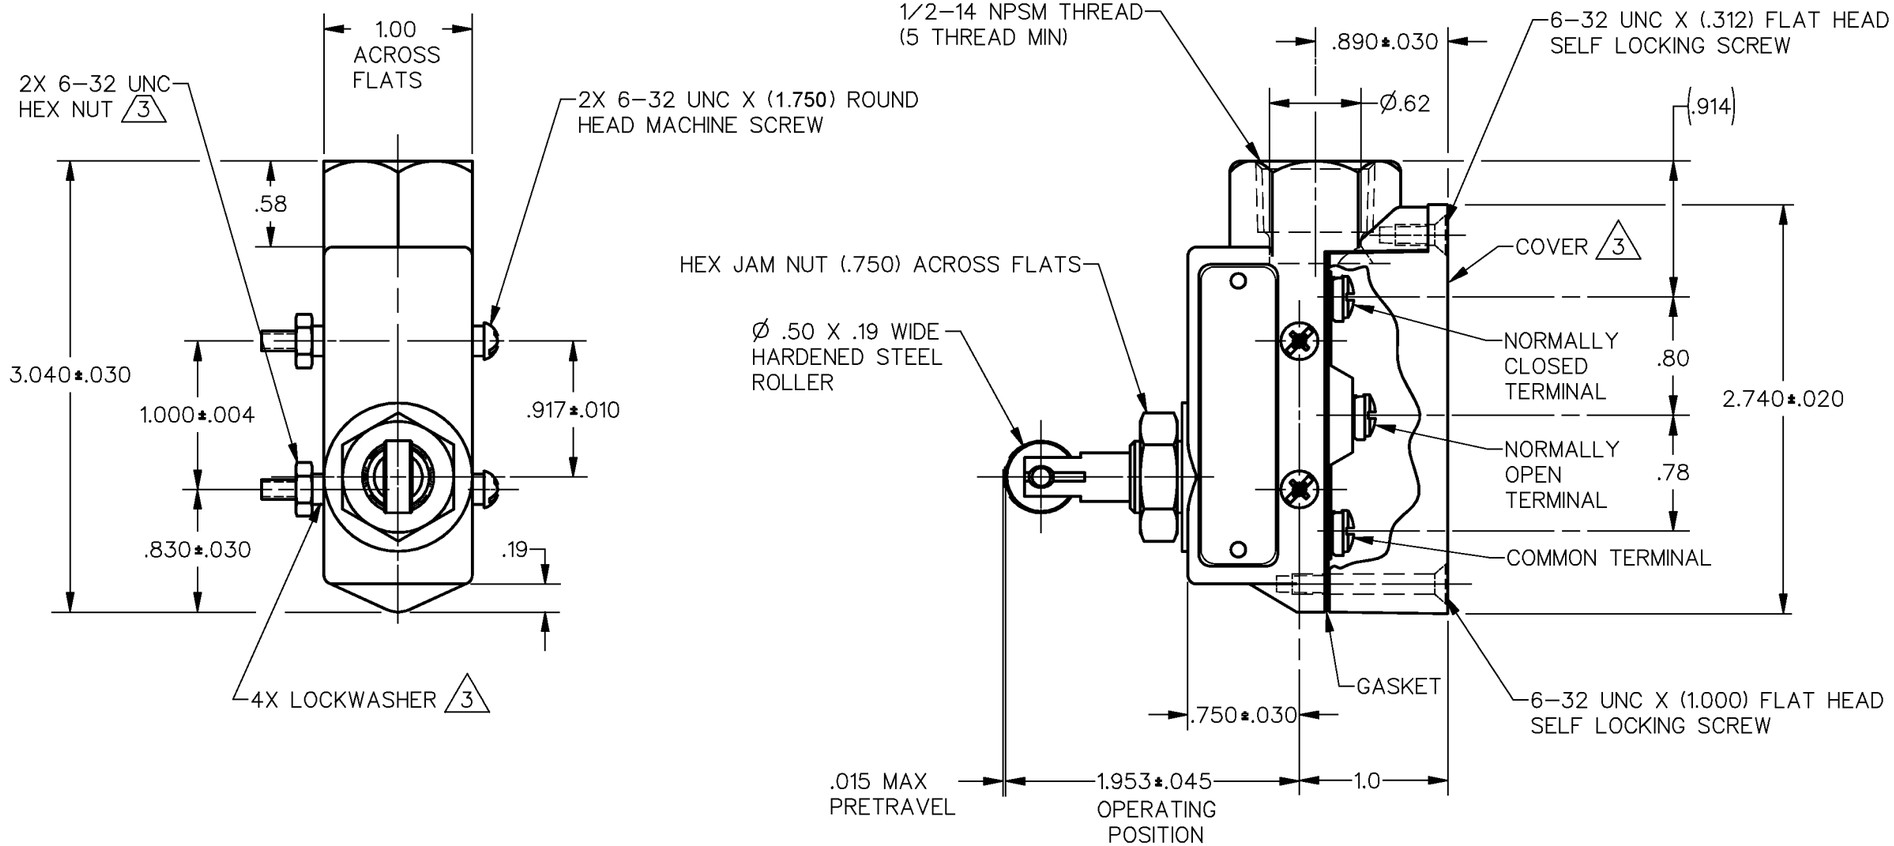

NOTES
1 – ZINC ENCLOSURE FINISHED WITH GRAY PAINT
2 – 3X 6–32 UNC X (.219) BINDING HEAD TERMINAL SCREW AND CUPWASHER
3 FURNISHED UNASSEMBLED
4 - SEAL RATING: NEMA 1
IP40

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

CHARACTERISTICS

OPERATING FORCE	9–13 OZ
RELEASE FORCE	4 OZ MIN
DIFFERENTIAL TRAVEL	.002 MAX
OVERTRAVEL	.140 MIN
SWITCH – BASIC REPLACEMENT	BZ–2RQ69

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L74
15A 125, 250 OR 480 VAC
2A 600 VAC
1/8HP 125 VAC, 1/4HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC

CE 1.5A, 240 Vac

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .56 LB

ANSI Y14.5M–1982 APPLIES

CATALOG LISTING BZE6–2RQ9–S
PAGE 1 OF 1
ISSUE 5 M
RELEASE NO. PR–14687
REPLACES

REVISIONS

A	OBSOLETE C077459	K E U 31 MAY 94	29AUG07
B	REISNT PR22094	S A V 20 MAR 96	
C	0016894	KRB 10 NOV 05	PSR
D	0033014	BS 29AUG07	

RASTER
DRAWN S A V 20 MAR 96
CHECK RJ 10 NOV 05
CHECK PSR 29AUG07
CHECK