
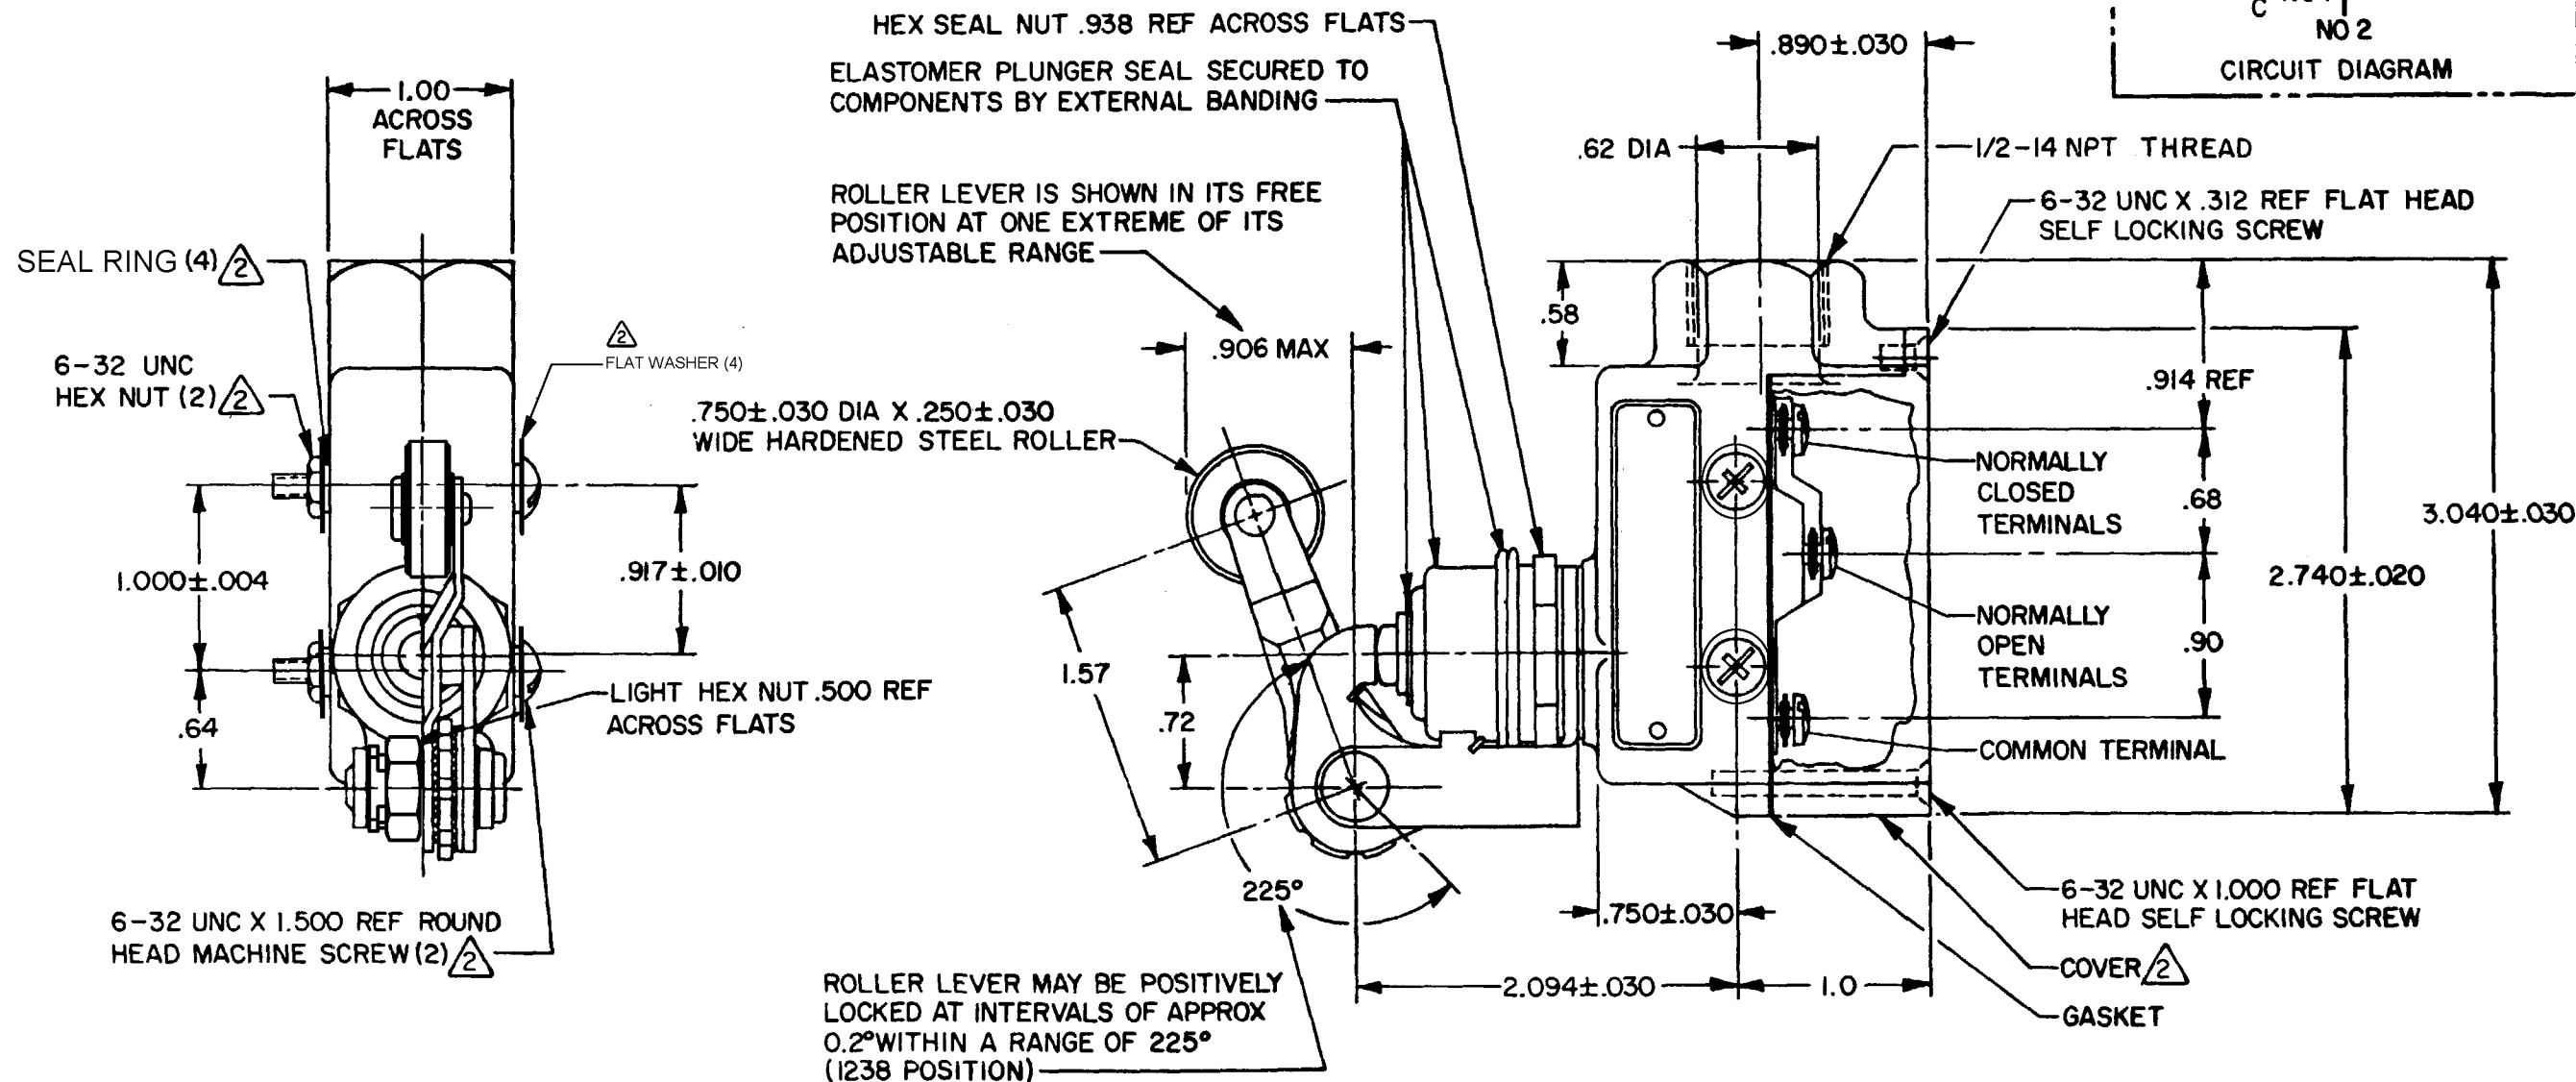


MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
BZE6-3YN2

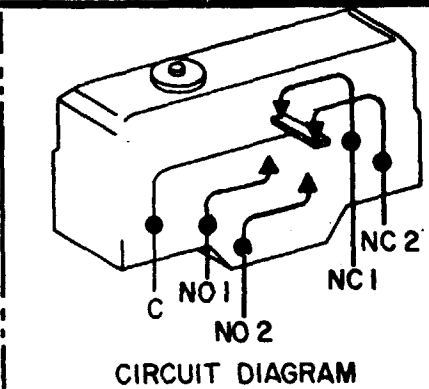

ROLLER LEVER MAY BE POSITIVELY
LOCKED AT INTERVALS OF APPROX
0.2° WITHIN A RANGE OF 225°
(1238 POSITION)

NOTES

- 1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND WASHER (SEMS) (5)
- ② FURNISHED UNASSEMBLED
- 3 - ROLLER LEVER BRACKET ASSEMBLY MAY BE SET AT ANY POSITION AROUND
AXIS OF PLUNGER
- 4 - SEAL RATING: NEMA 1, 3
IP54

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF
HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ——— 11-25 OZ	CONTACT ARRANGEMENT SPDT SPLIT CONTACT	DO NOT SCALE PRINT
RELEASE FORCE ——— 4 OZ MIN	CODE L4 5A - 250 VAC	UNLESS OTHERWISE NOTED
PRETRAVEL ——— .188 MAX		DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL ——— .012 MAX		TOLERANCES ARE:
OVERTRAVEL ——— .219 MIN		ONE PLACE (.0) ±.030
BASIC SWITCH REPLACEMENT — BZ-3YN702		TWO PLACE (.00) ±.015
		THREE PLACE (.000) ±.005
		ANGLES
		WEIGHT .71 LB

FORMTEK

DRAWN

SLB 30 AUG 77

CHECK K P K

BP 22 NOV 05

RELEASE NO.

REPLACES

BZE6-3YN2

M

DRAWING
NUMBER

9

ISSUE

REVISEMENTS

A CO-38200
SLB
3 AUG 77

B CO53191F
TSK
13 APR 84

C CO55989
CJH
8 NOV 84

D CO54958
G J W
7 JAN 85

E CO72618
L J F
14 SEP 92

F CO-77179B
K D R
21 FEB 94

G CO81513B
J A K
5 MAR 97

H 0017057
V K R
22 NOV 05