

MICRO SWITCH



A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FED. MFR. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
BZE 6-3YNT

CATALOG LISTING
BZE 6-3YNT
PAGE 1 OF 1
REPLACES
SR 10559
07DEC05
RJ
CHECK
BRJ
9, OCT '62
BRJ
9, OCT '62
DAW
CHECK
LMH
9 OCT 62
DRAWN
RASTER
FA-80578-A01

REV	DATE	BY	CHK	DESCRIPTION
A	17 JUL 64	W K		28 MAR 64
B	03191	K S		16 AUG 64
C	09958	J W		9 JAN 65
D	77198	DR		21 FEB 64
E	204566			
F	0017590			
G	07DEC05			

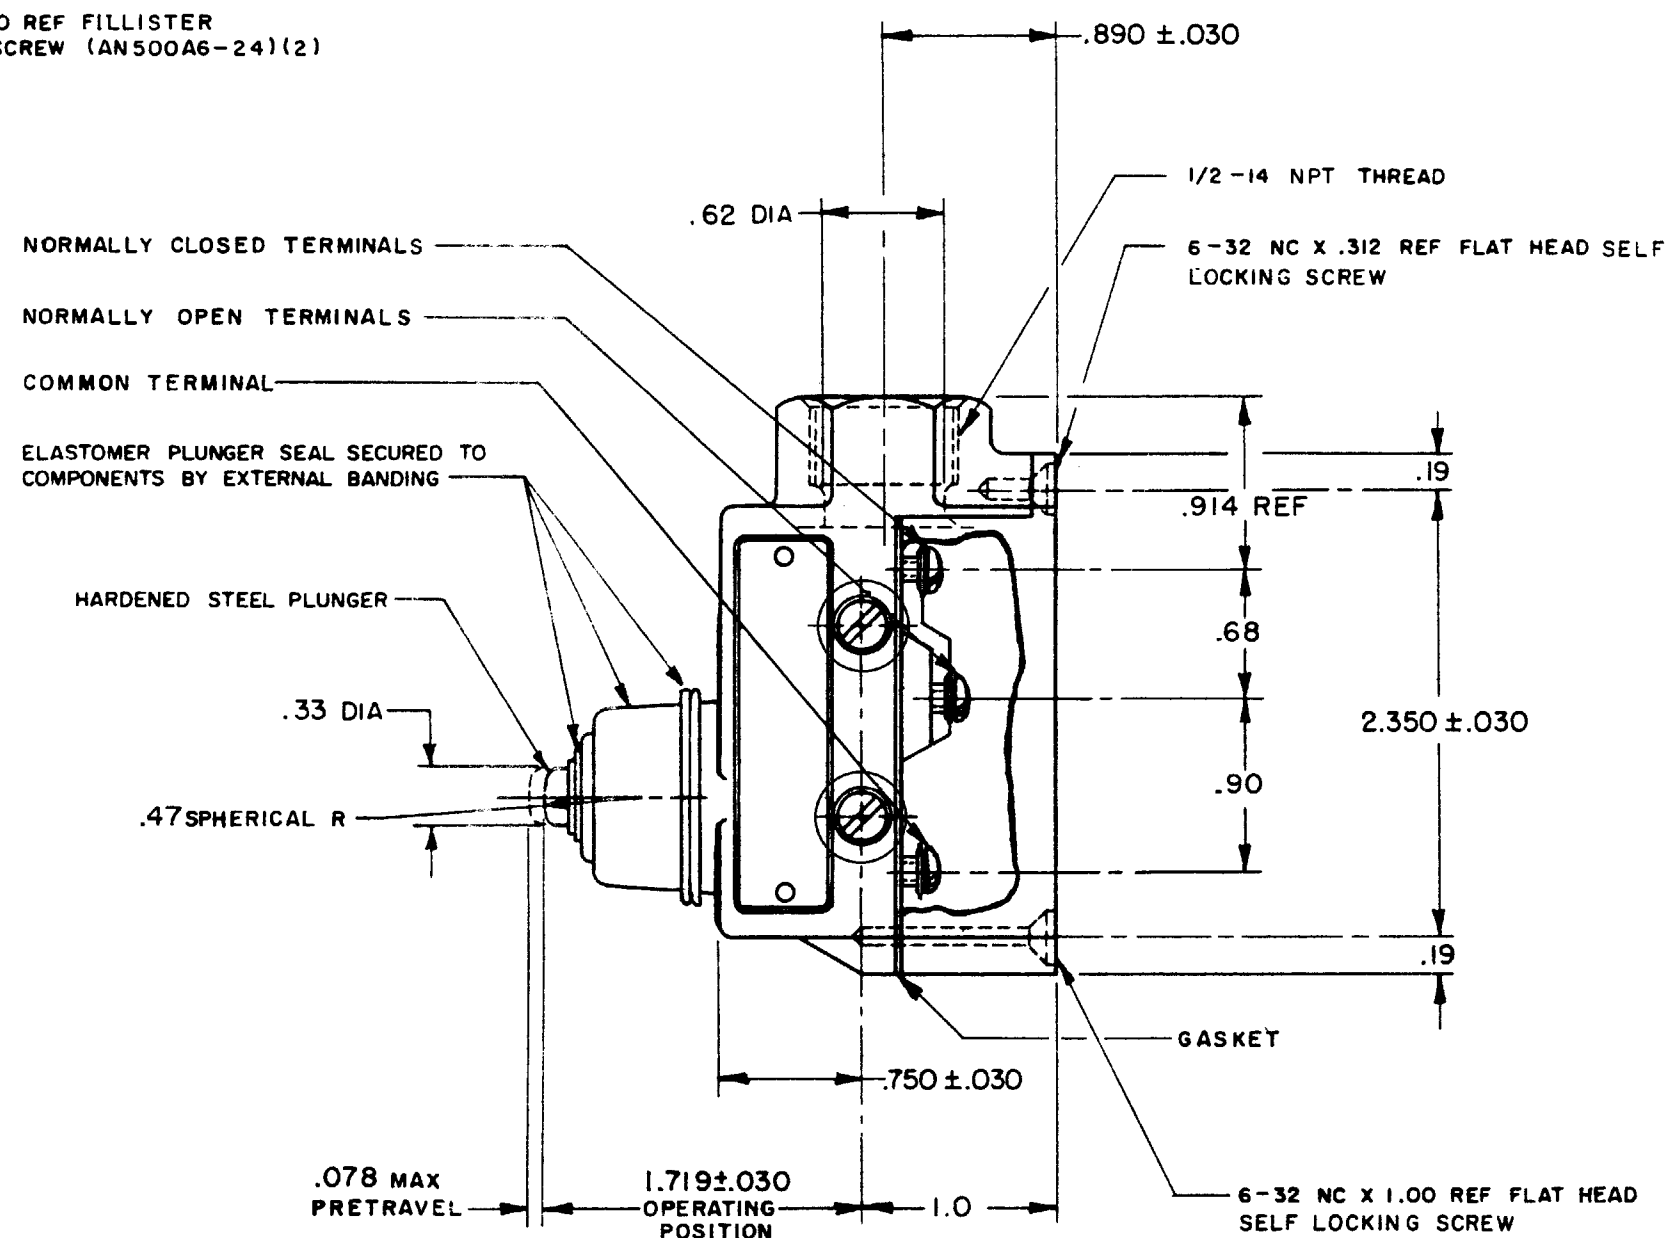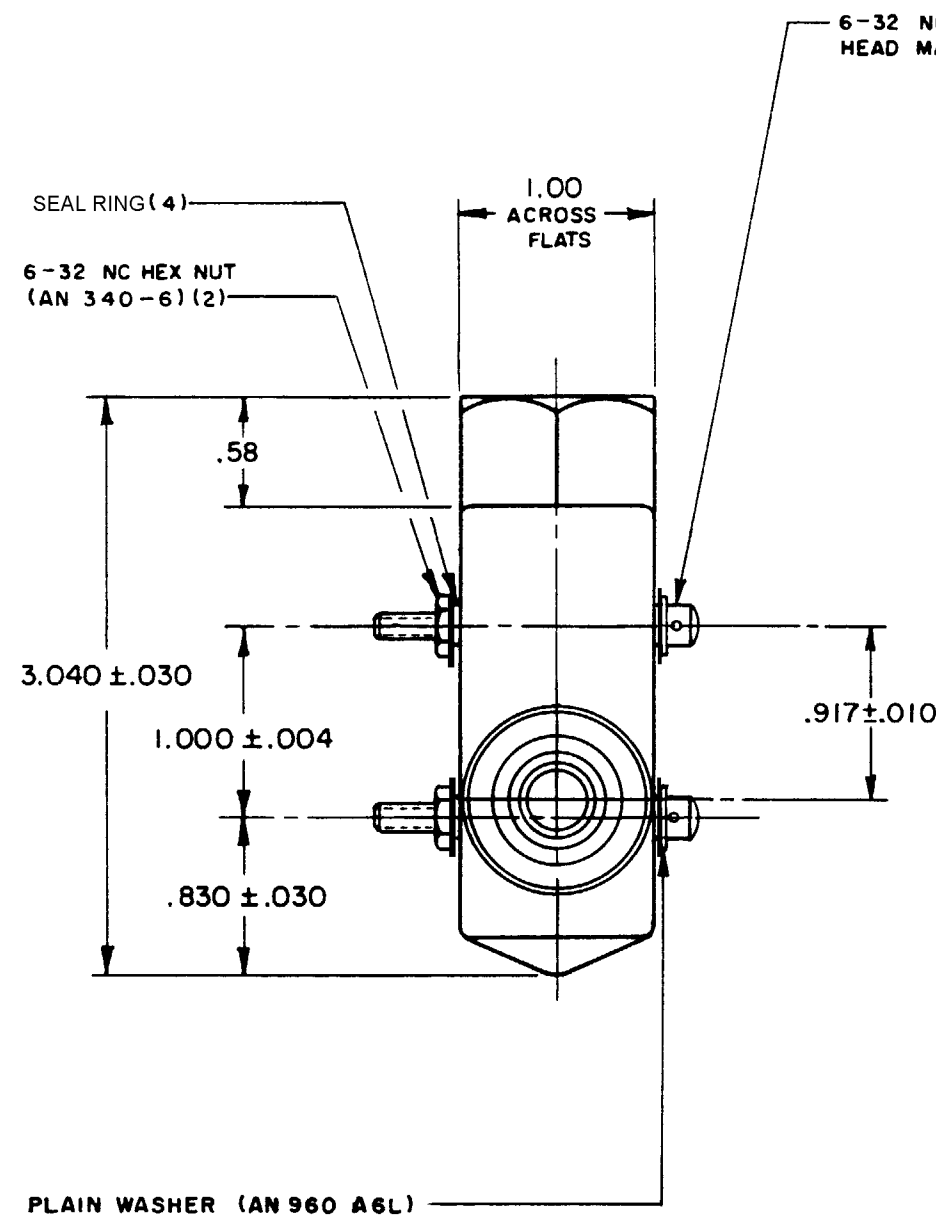

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA		SCALE FULL
OPERATING FORCE — — — — 22-54 OZ		CONTACT ARRANGEMENT	BREAK DISTANCE	DO NOT SCALE PRINT
RELEASE FORCE — — — — 10 OZ MIN		SINGLE POLE DOUBLE THROW SPLIT CONTACT		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL — — — .004 MAX		5A 250 VAC		TOLERANCES ARE:
OVERTRAVEL — — — — .219 MIN				ONE PLACE (.0) 2.030
SWITCH-BASIC REPLACEMENT — — BZ-3YN703				TWO PLACE (.00) 2.015
				THREE PLACE (.000) 2.005
				ANGLES 2
				WEIGHT .56 LB

NOTES

- 1 - ZINC ENCLOSURE
- 2 - 6-32 NC X .218 REF BINDER HEAD TERMINAL SCREW AND LOCKWASHER (SEMS) (5)
- 3 - SWITCH WILL PREFORM SATISFACTORILY IN TEMPERATURES TO -65°F