
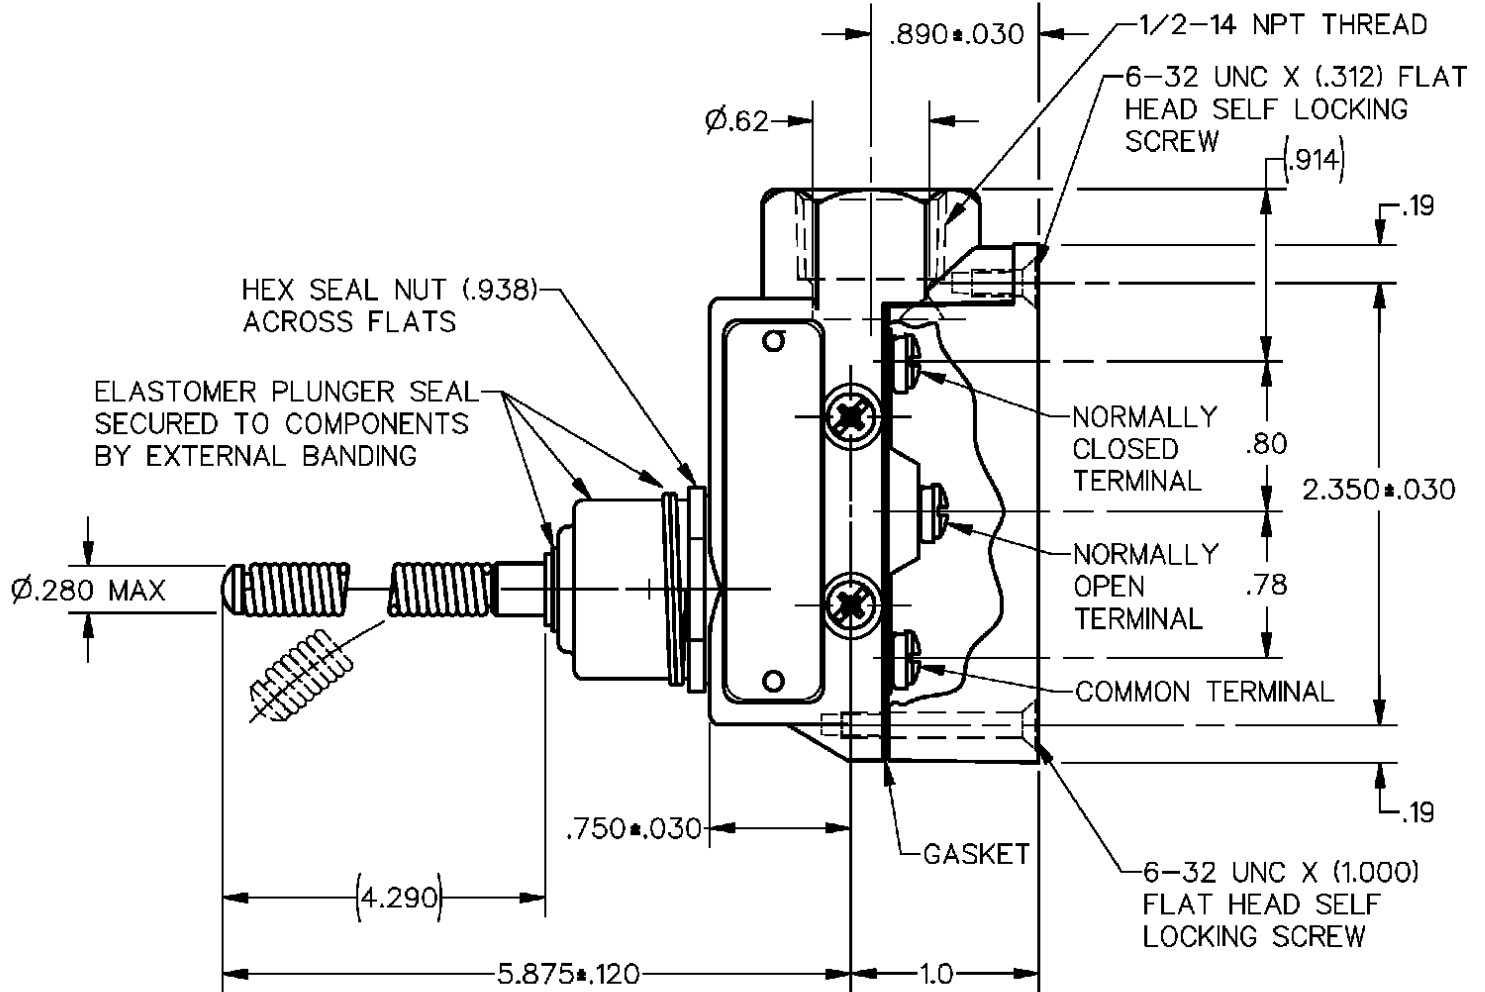


CATALOG LISTING
BZE6-7RN18
PAGE 1 OF 1
RELEASE NO. PR-22651 REPLACES
CHECK
REVISIONS
A 0017057
VJR
23NOV05
CHECK
23NOV05
BP
CHECK
20 FEB 97
JAK
DDM/CAD
DRAWN

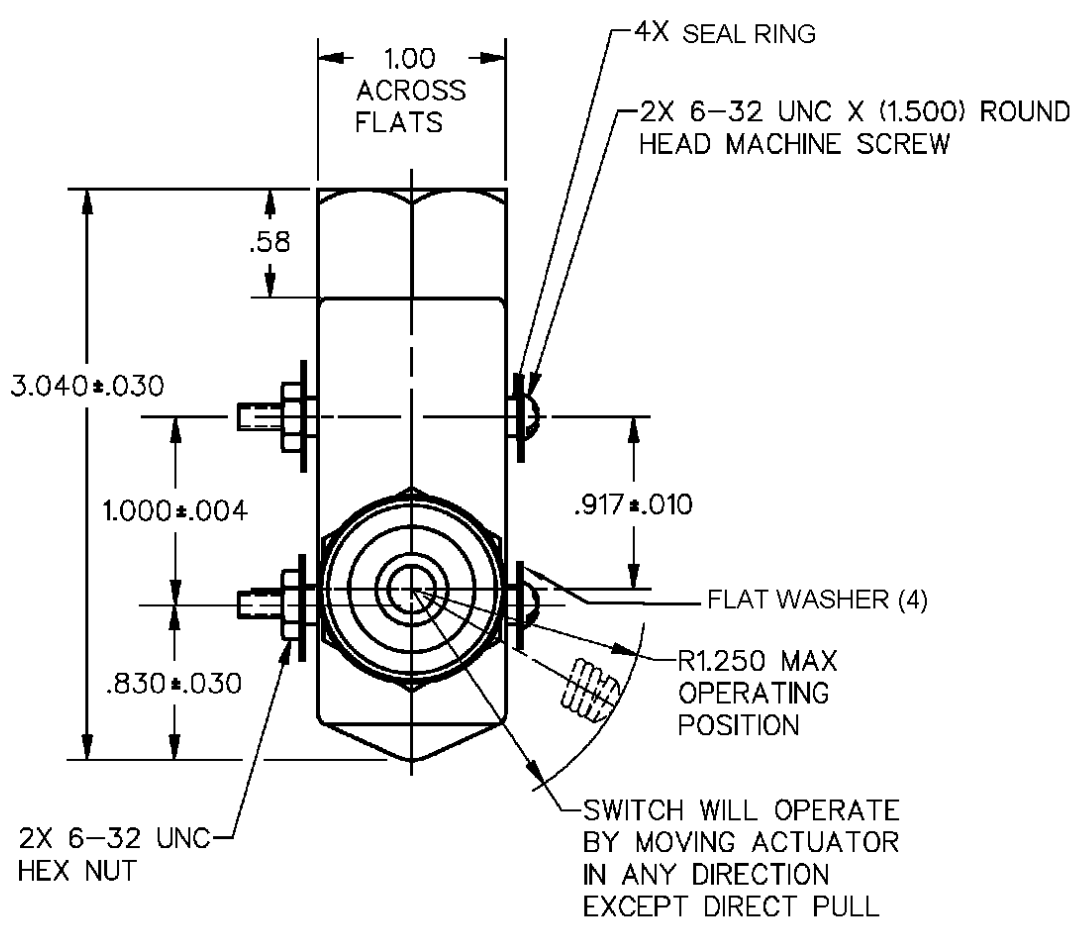

NOTE
1 - 3X 6-32 UNC X (.219) TERMINAL SCREW AND CUPWASHER
2 - SEAL RATING: NEMA1,3
IP54

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH		THIRD ANGLE PROJECTION
CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE — — — — — 7 OZ MAX	CONTACT ARRANGEMENT	DO NOT SCALE PRINT
OPERATING POSITION — — — — — 15° MAX	S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
SWITCH BASIC REPLACEMENT — — — BZ-7R-A2	L96	ONE PLACE (.0) ± .030
	15A 125, 250 OR 480 VAC	TWO PLACE (.00) ± .015
	1/8HP 125 VAC, 1/4HP 250 VAC	THREE PLACE (.000) ± .005
	1/2A 125 VDC, 1/4A 250 VDC	ANGLES ±
	CE 1.5A, 240Vac	WEIGHT

ANSI Y14.5M-1982 APPLIES