**MICRO SWITCH**
a Honeywell Division
FED. MFG. CODE 91929

# SWITCH – ENCLOSED

CATALOG LISTING
BZE6–7RN1812

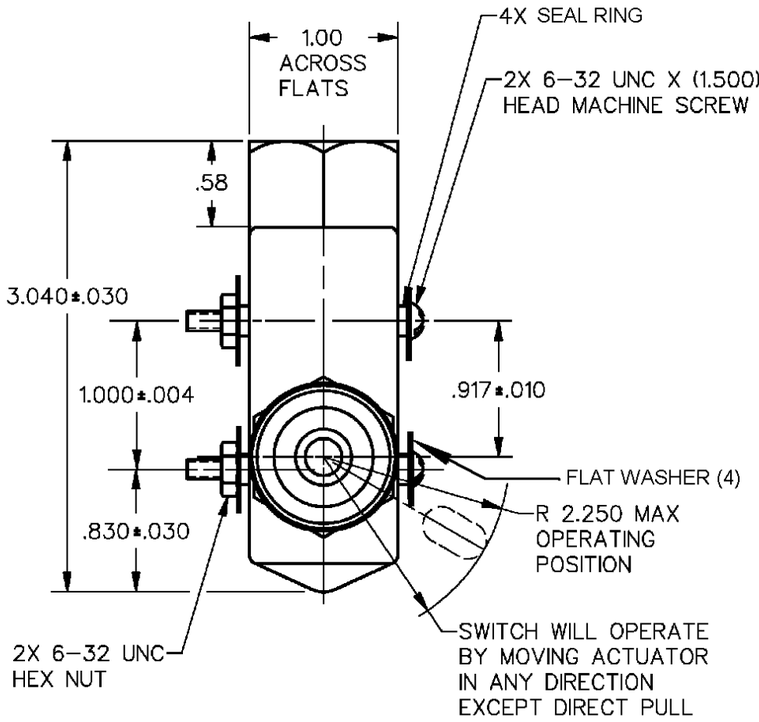


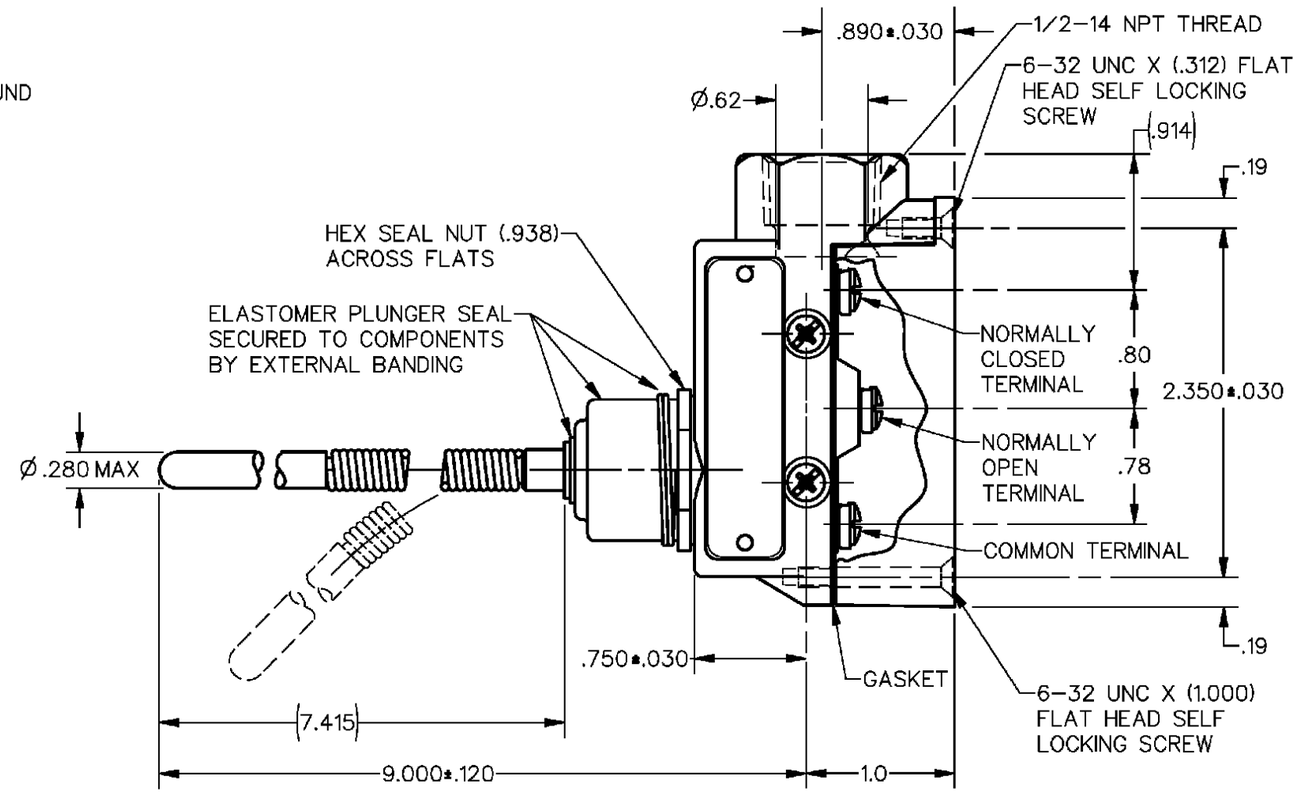


| CHARACTERISTICS | |
|---|---|
| OPERATING FORCE | 7 OZ MAX |
| OPERATING POSITION | 15° MAX |
| SWITCH – BASIC REPLACEMENT | BZ–7R–A2 |

**ELECTRICAL DATA**

CONTACT ARRANGEMENT
S P D T

L96
15A 125, 250 OR 480 VAC
1/8HP 125 VAC, 1/4HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC

CE 1.5A, 240Vac

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

**UNLESS OTHERWISE SPECIFIED TOLERANCES ARE**

| | | |
|---|---|---|
| ONE PLACE | (.0) | ±.030 |
| TWO PLACE | (.00) | ±.015 |
| THREE PLACE | (.000) | ±.005 |
| ANGLES | | ± |

WEIGHT

NOTE
1 – 3X 6–32 UNC X (.219) TERMINAL SCREW AND CUPWASHER
2 - SEAL RATING: NEMA1,3
IP54

ANSI Y14.5M–1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CATALOG LISTING BZE6–7RN1812
RELEASE NO. PR–22651 REPLACES
ISSUE 2

REVISIONS
A 0017057 VKR 23NOV05

| DRAWN | CHECK | CHECK | CHECK | CHECK |
|---|---|---|---|---|
| JAK 20 FEB 97 | BP 23 NOV 05 | | | DDM/CAD |