


MICRO SWITCH
a Honeywell Division

SWITCH — ENCLOSED

CATALOG LISTING
BZE6-7RN51

FED. MFG. CODE 91929

CATALOG LISTING
BZE6-7RN51
PAGE 1 OF 1
RELEASE NO. PR-22651 REPLACES
ISSUE **M** 2
CHECK
REVISIONS
A 0017057
VKR
23NOV05
CHECK
BP 23NOV05
CHECK
JAK 21 FEB 97
DDM/CAD
DRAWN

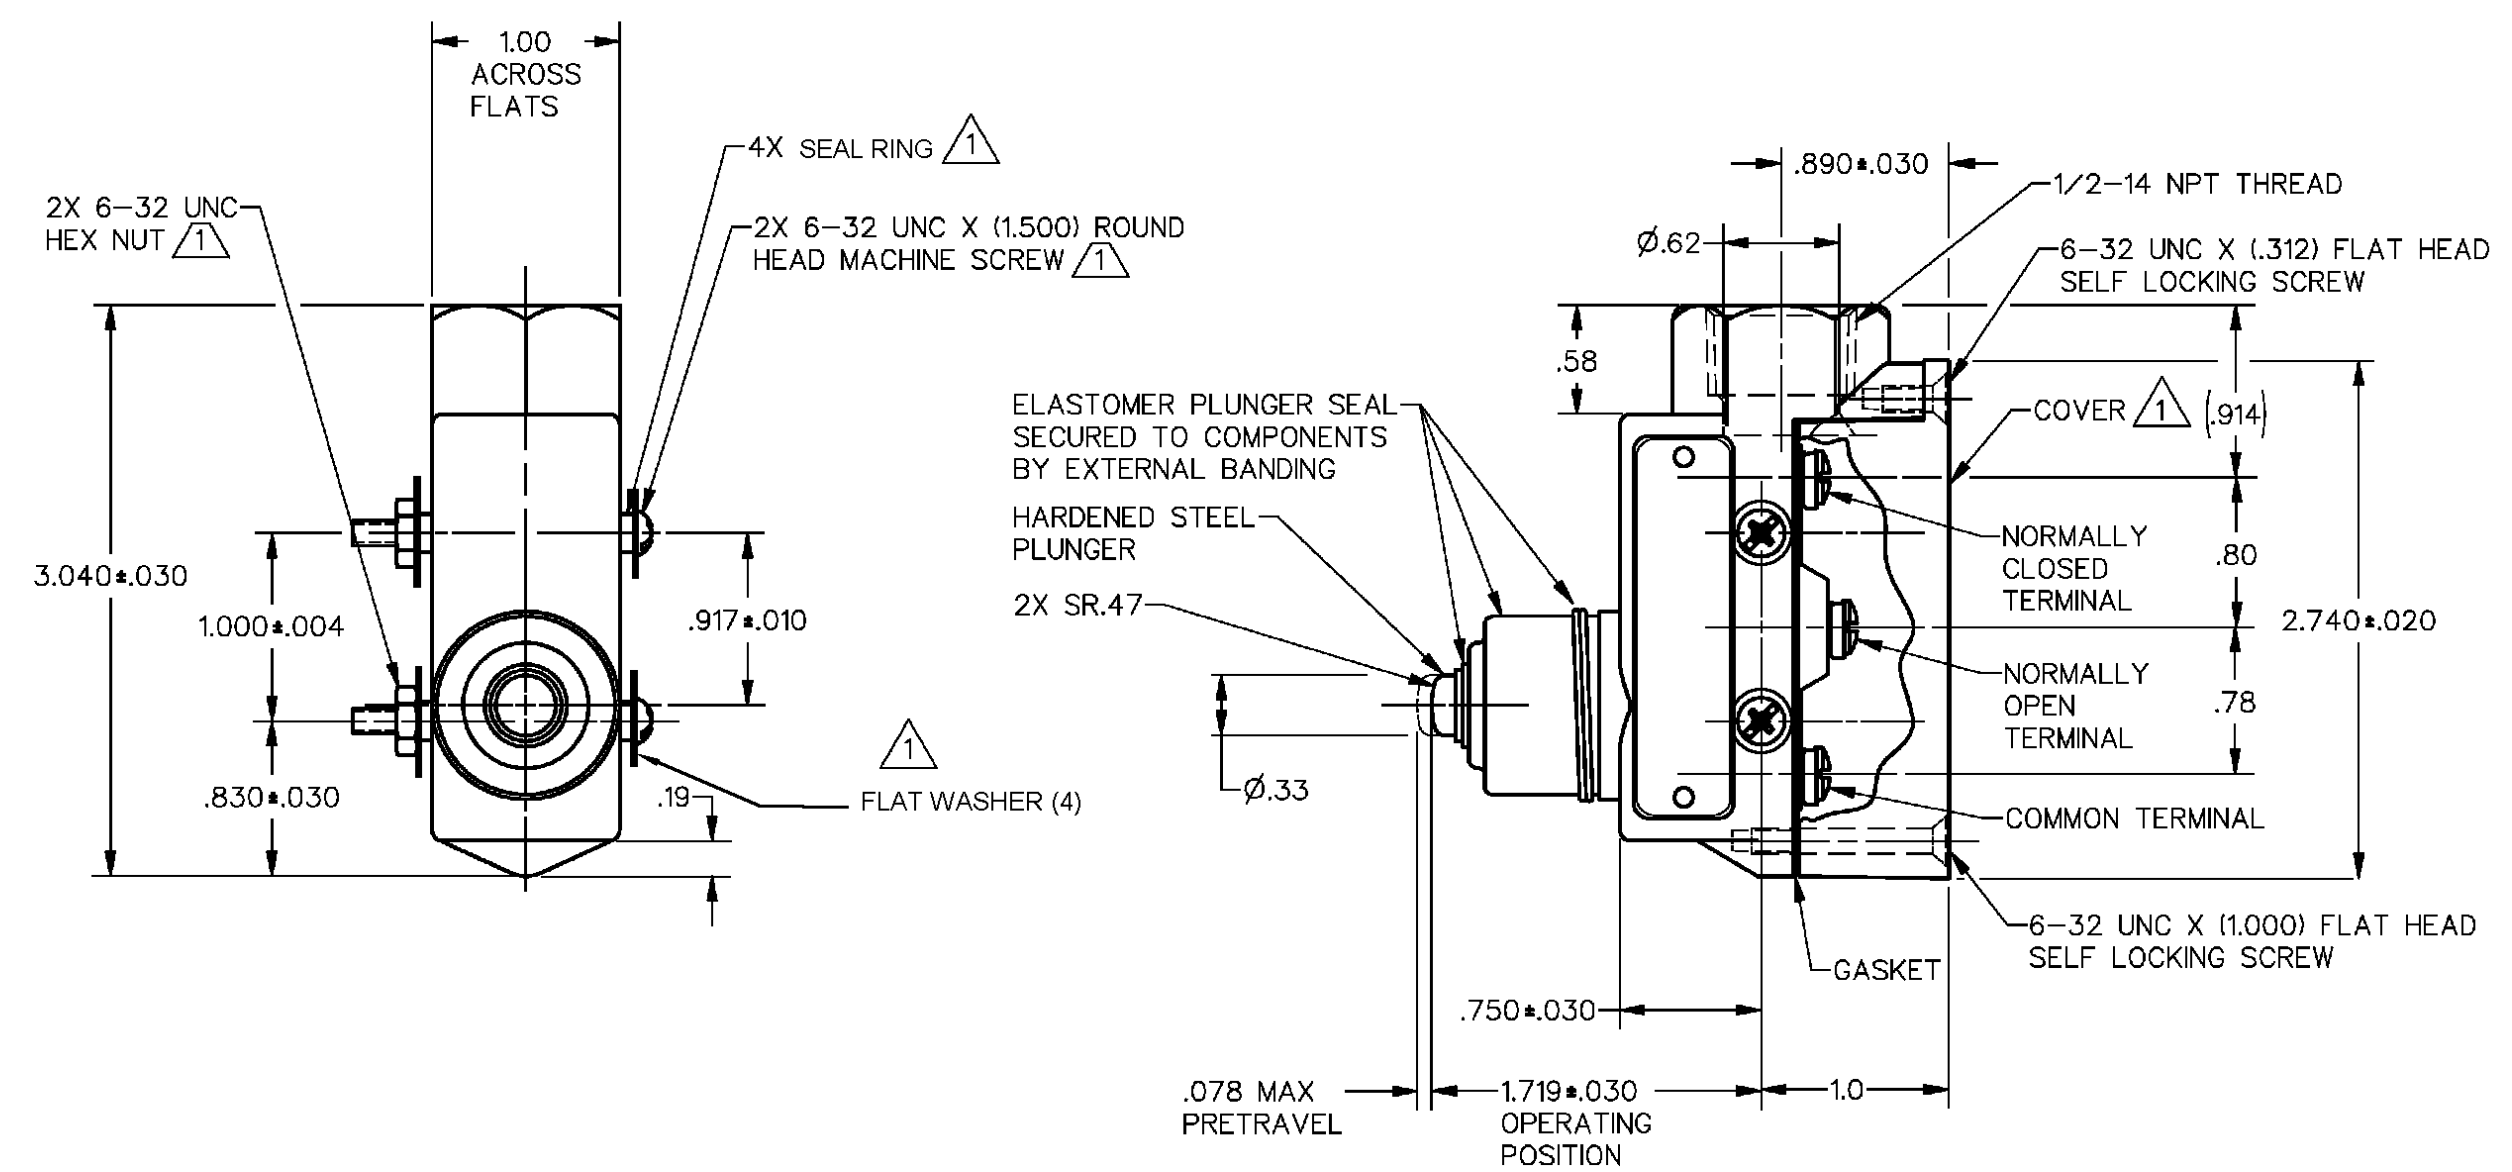

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CHARACTERISTICS	ELECTRICAL DATA
OPERATING FORCE ——— 28-54 OZ	CONTACT ARRANGEMENT S P D T
RELEASE FORCE ——— 10 OZ MIN	L74 15A 125, <u>250</u> OR 480 VAC
DIFFERENTIAL TRAVEL ——— .005 MAX	2A 600 VAC
OVERTRAVEL ——— .219 MIN	1/8HP 125 VAC, 1/4HP <u>250</u> VAC
BASIC SWITCH REPLACEMENT ——— BZ-7RQ67	1/2A 125 VDC, 1/4A 250 VDC
	CE 1.5A, 240Vac

THIRD ANGLE PROJECTION	
SCALE	FULL
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE	(.0) ± .030
TWO PLACE	(.00) ± .015
THREE PLACE	(.000) ± .005
ANGLES	±
WEIGHT	.56 LB

NOTE
1 FURNISHED UNASSEMBLED
2 - 3X 6-32 UNC X (.219) BINDING HEAD TERMINAL SCREW AND CUPWASHER
3 - SEAL RATING: NEMA1,3
IP54

ANSI Y14.5M-1982 APPLIES