

MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
BZE6-7RQ9

BZE6-7RQ9

M

DRAWING
NUMBER

ISSUE

8
8
8

REPLACES

PR-11125

29AUG07

PSR

CHECK

10 NOV 05

RJ

CHECK

16 APR 82

CEB

TSK



16 APR 82

CHECK

16 APR 82

CEB

TSK

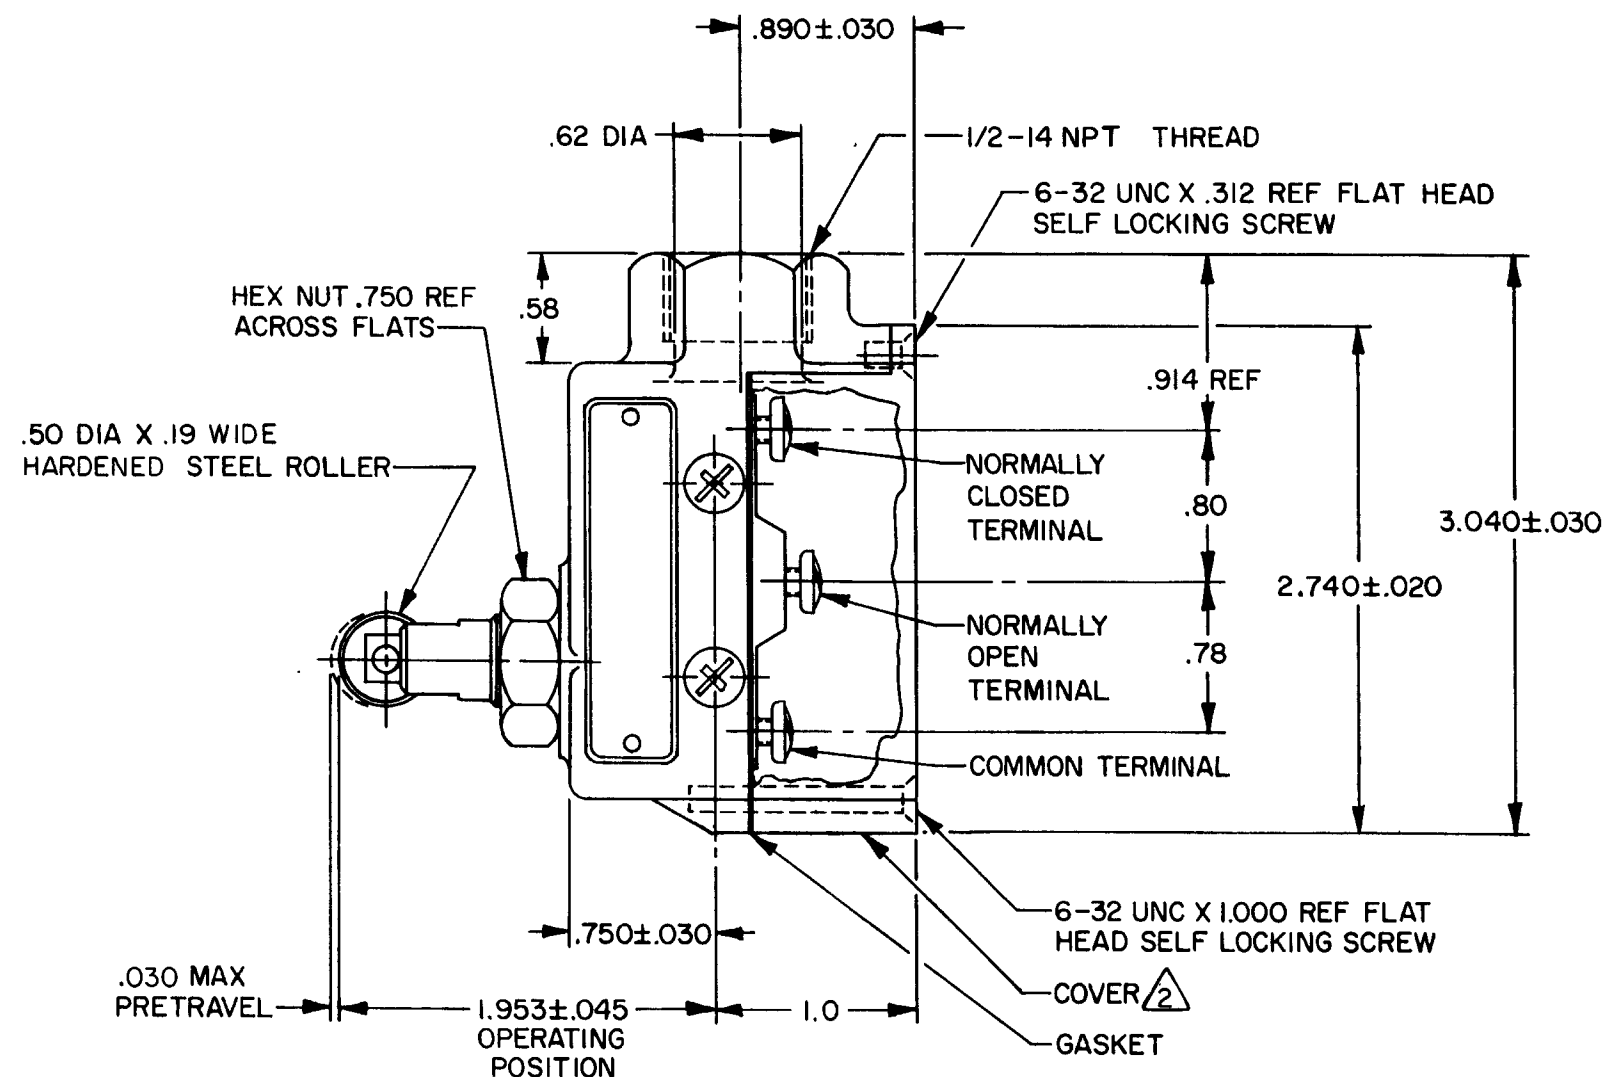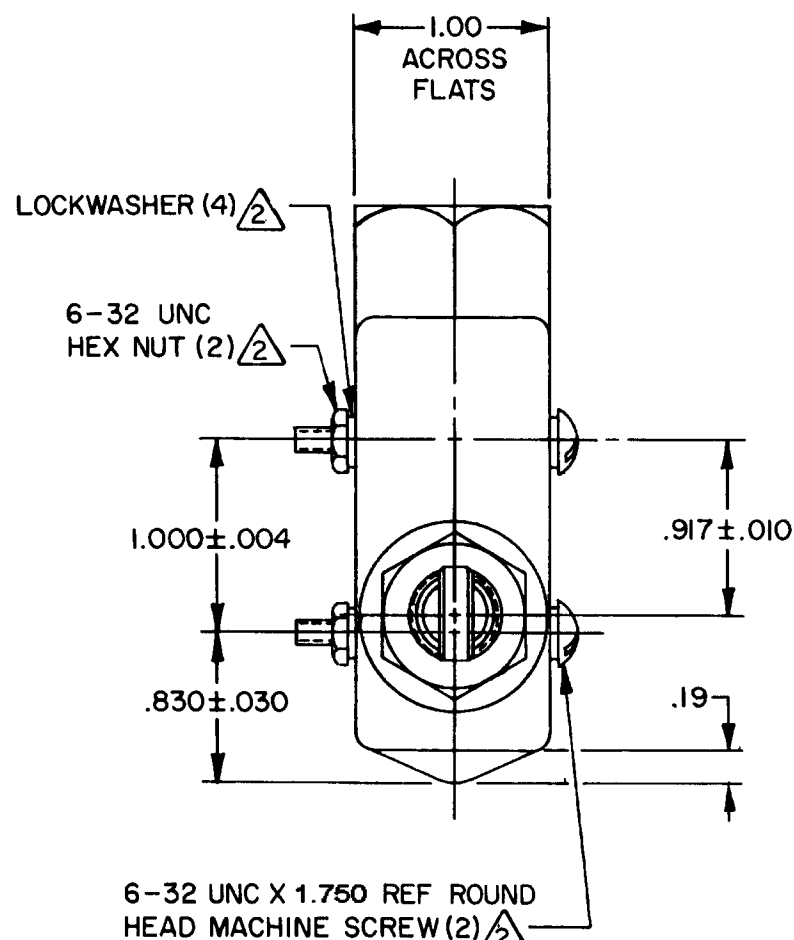

NOTES -

- 1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3)
- ² - FURNISHED UNASSEMBLED
- 3 - SEAL RATING: NEMA 1
IP40

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 22-28 OZ

RELEASE FORCE ----- 4 OZ MIN

DIFFERENTIAL TRAVEL ----- .005 MAX

OVERTRAVEL ----- .140 MIN

BASIC SWITCH REPLACEMENT ----- BZ-7RQ69

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

15A-125, 250 OR 480 VAC, 2A-600 VAC

1/8 HP-125 VAC; 1/4 HP-250 VAC

1/2A-125 VDC; 1/4A-250 VDC

CODE L74

CE 1.5A, 240 Vac

SR

91

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE UNLESS NOTED. TOLERANCES ARE ±

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/64	X	0.015
ONE PLACE	X, X	0.015	X, X	0.015
TWO PLACES	X, XX	0.005	X, XX	0.005
THREE PLACES	X, XXX	0.001	X, XXX	0.001

DESIGN UNITS ☐ SI METRIC ☒ US CUSTOMARY

THIRD ANGLE PROJECTION



WEIGHT .56 LB