

MICRO SWITCH
FREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL
FED MFG CODE 91928

SWITCH-ENCLOSED

CATALOG LISTING
BZE6-RN18X1

BZE6-RN18X1

M

DRAWING
NUMBER

ISSUE
X10

REPLACES

PR-11937

29AUG07

PSR

CHECK

23NOV05

BP

CHECK

14 FEB 83

14 FEB 83

14 FEB 83

CHECK

14 FEB 83

CHECK

14 FEB 83

REVISIONS

A	PR-11937	14 FEB 83
B	C053191	17 FEB 84
C	C054958	30 MAY 85
D	C072618	14 SEP 92
E	77179-E	16 MAY 94
G	0017057	VKR 23NOV05
H	0023923	RKP 24AUG06
J	0025947	KML 27OCT06
K	0033014	BS 29AUG07

RASTER
FO-32881-B

DRAWN

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CHARACTERISTICS

OPERATING FORCE-----7 OZ MAX
OPERATING POSITION-----15° MAX

RESET CHARACTERISTICS

OPERATING FORCE-----12-30 OZ
OVERTRAVEL-----.141 MIN
BASIC SWITCH REPLACEMENT-----BZ-RX-A29

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T MAINTAINED CONTACT

CODE L67 15A-125, 250 OR 480 VAC
1/4HP-125 VAC, 1/2HP-250 VAC
1/2A-125 VDC, 1/4A-250 VDC

CE 1 5A 240Vac

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS CONVERSIONS ARE ONLY FOR
REFERENCE UNLESS NOTED TOLERANCES ARE 2


DIM	TOL	DIM	TOL
mm	mm/in	in	mm/in
NO PLACES	X	1/04	X
ONE PLACE	X X	0 4/018	X X
TWO PLACES	X X X	0 16/100	X X X
THREE PLACES	X X X X	0 64/1000	X X X X
ANGLES	X	0 13/008	X

SI METRIC ☐ US CUSTOMARY ☐

DESIGN UNITS ☐ THIRD ANGLE PROJECTION ☐

THIRD ANGLE PROJECTION

WEIGHT .78 LB

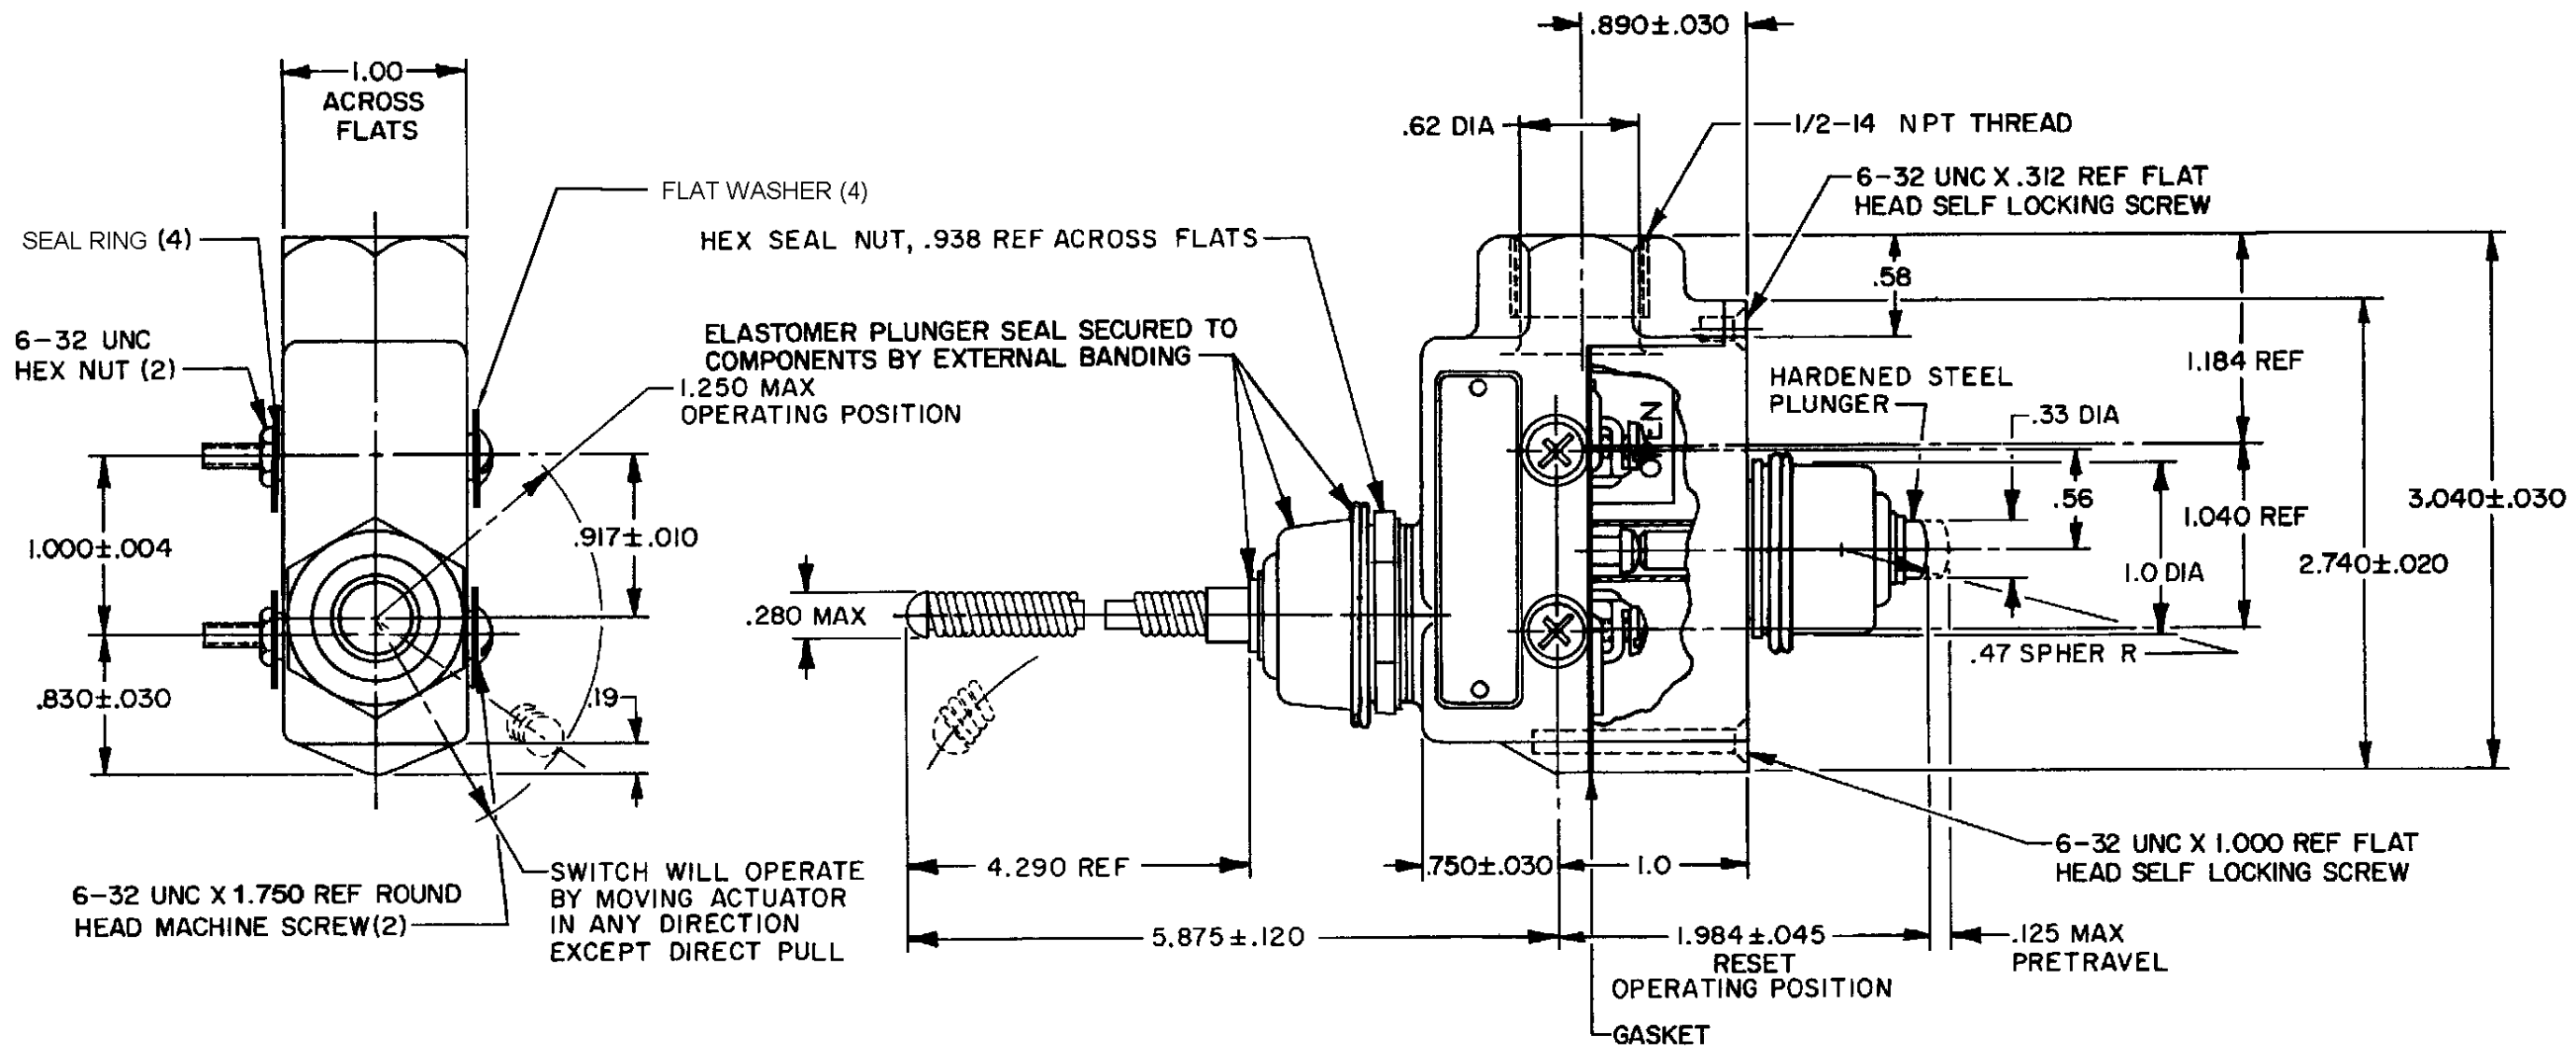

NOTES-

- 1 - 6-32 UNC X .218 REF BINDING HEAD TERMINAL SCREW (3)
- 2 - SEAL RATING NEMA1 3 4 IP66