

MICRO SWITCH

FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
BZE6-RN18X2

BZE6-RN18X2

M

DRAWING
NUMBER

6

ISSUE

REPLACES

PR-21007

29AUG07

PSR

CHECK

23NOV05

BP

CHECK

2 MAY 94

KEU


CHECK

29 APR 94

KEU

DRAWN

RASTER

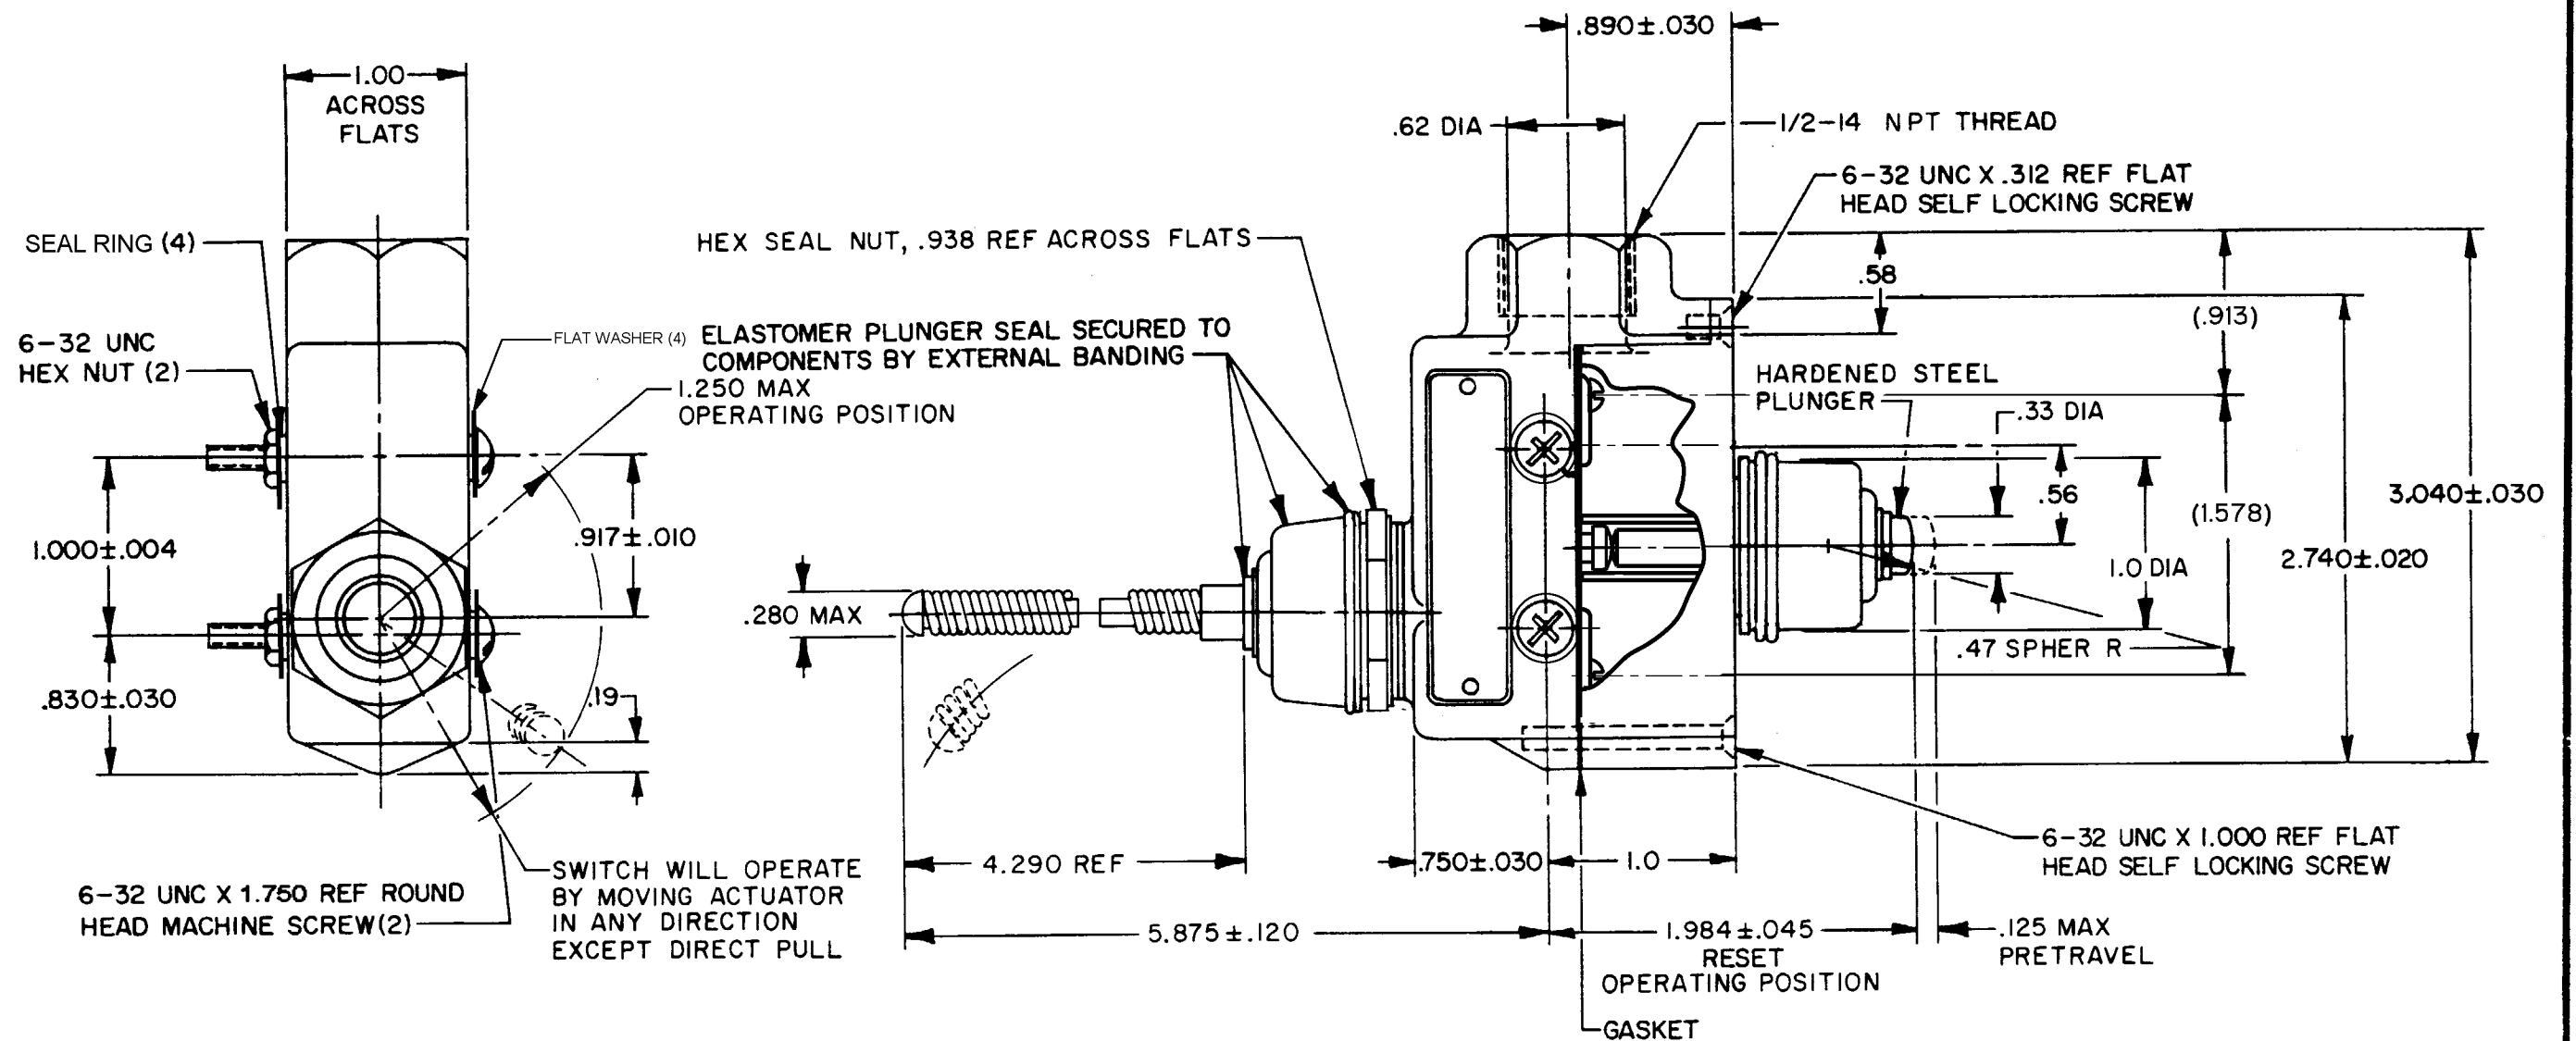

1 - SEAL RATING: NEMA1,3,4
IP66

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE----- 7 OZ MAX
OPERATING POSITION----- 15° MAX

RESET CHARACTERISTICS

OPERATING FORCE----- 12-30 OZ
OVERTRAVEL----- .141 MIN
BASIC SWITCH REPLACEMENT----- BZ-RX60

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T MAINTAINED CONTACT

CODE L67 15A-125, 250 OR 480 VAC
1/4HP-125 VAC; 1/2HP-250 VAC
1/2A-125 VDC; 1/4A-250 VDC

CE 1.5A, 240Vac

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:

DIM.	TOL.	DIM.	TOL.
NO PLACES	X	1/16	0.0005
ONE PLACE	X.X	3/16, 1/8	0.001
TWO PLACES	X.XX	1/4, 3/8, 1/2	0.002
THREE PLACES	X.XXX	3/4, 1, 1 1/2	0.005
ANGLES			

DESIGN UNITS ☐ SI METRIC ☐ US CUSTOMARY

THIRD ANGLE PROJECTION

WEIGHT .78 LB