

CATALOG LISTING

BZE6-RN18X3

ISSUE

6

REVISIONS

A	0084573	JAK	28 APR 97
B	0017057	VKR	23 NOV 05
C	0023923	RKP	24 AUG 06
D	0025947	KML	27 OCT 06
E	0033014	BS	29 AUG 07

RASTER

DRAWN

JAK

21 FEB 97

CHECK

TSM

25 FEB 97

CHECK



PSR

29 AUG 07

RELEASE NO.

PR-22651

REPLACES

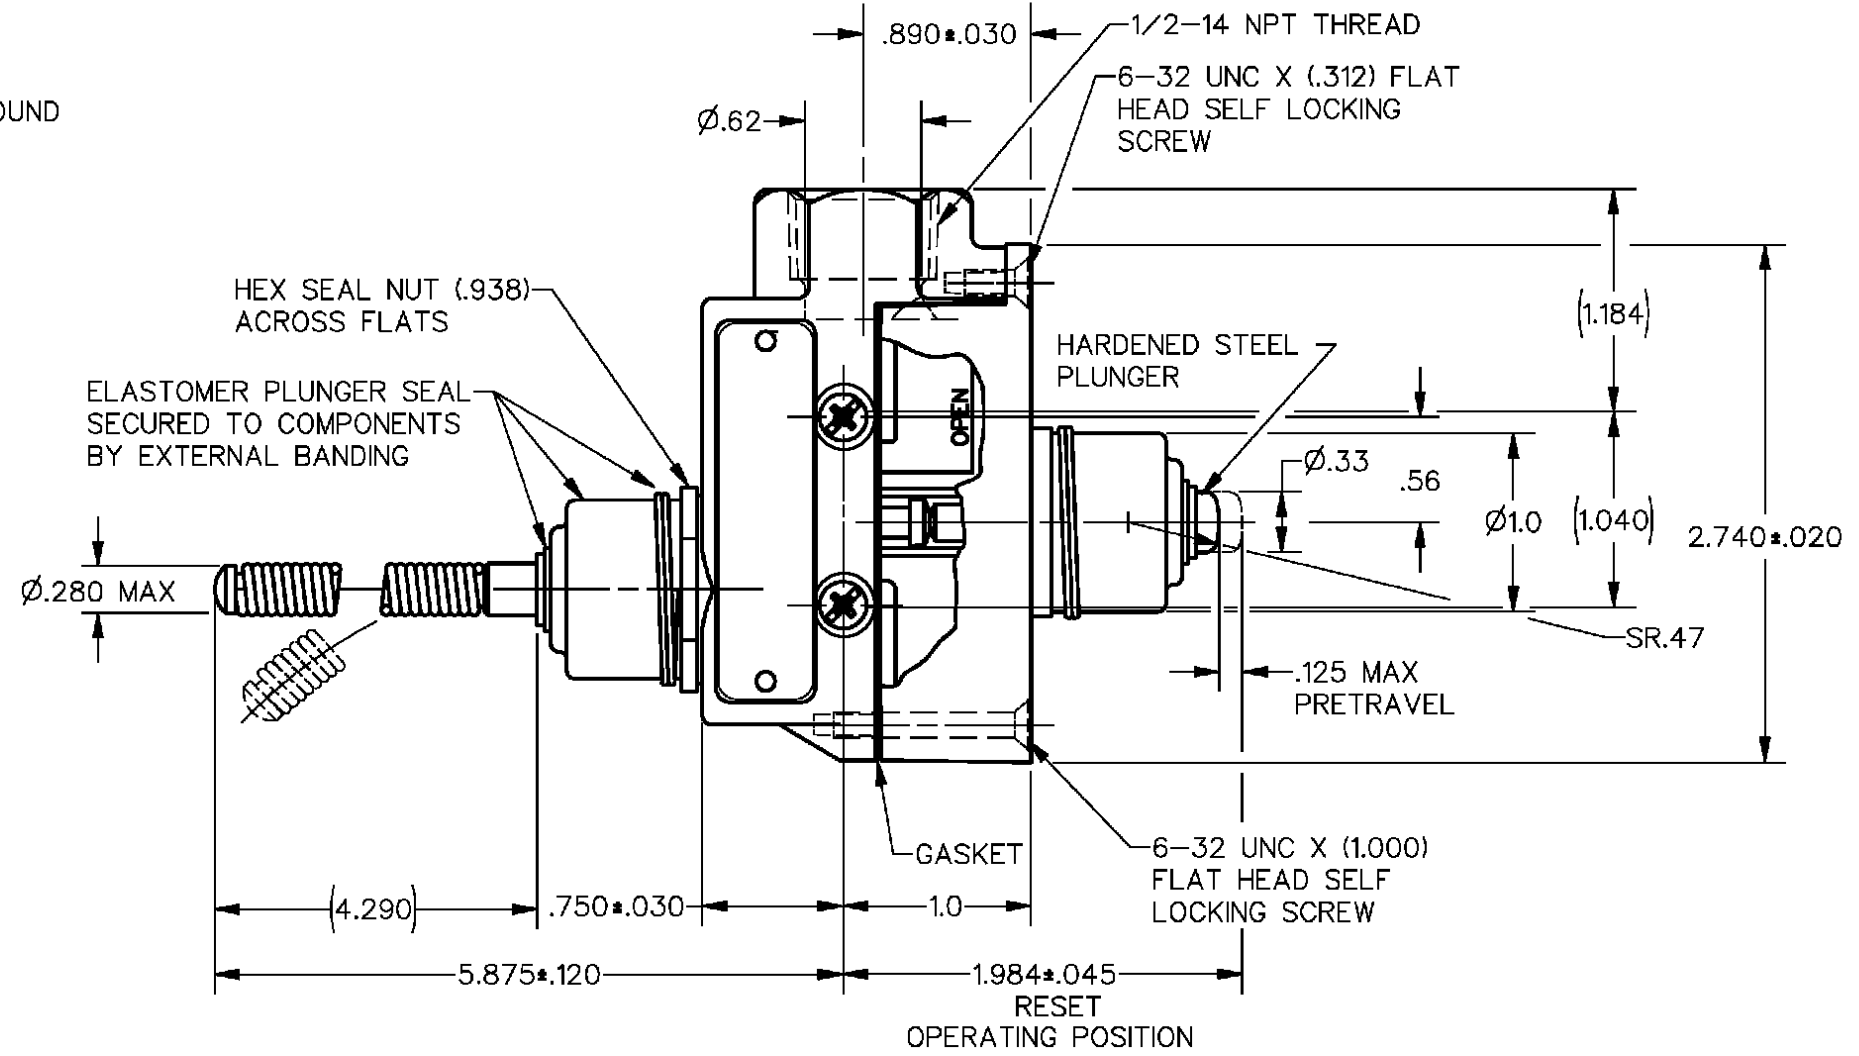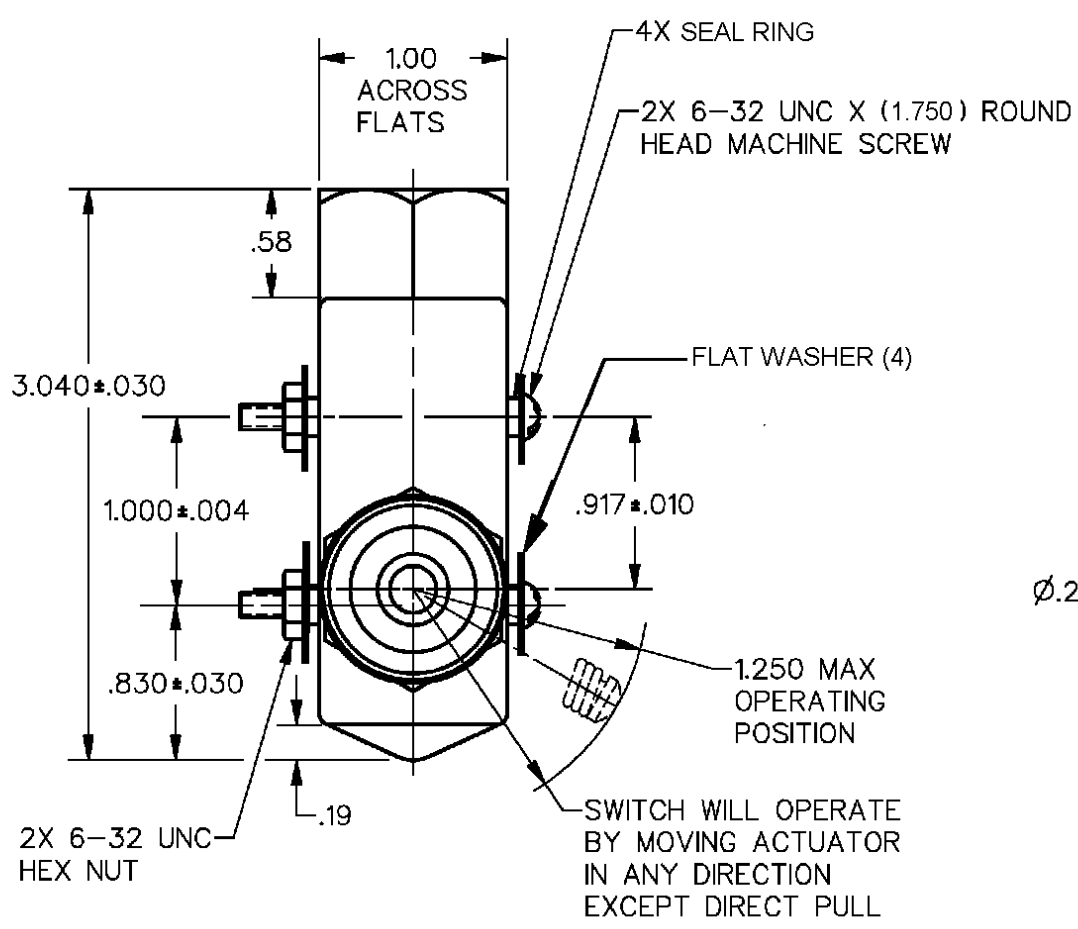

1- SEAL RATING: NEMA1,3,4
IP66

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH		THIRD ANGLE PROJECTION
CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE — — — — 12 OZ MAX	CONTACT ARRANGEMENT	DO NOT SCALE PRINT
OPERATING POSITION — — — — 15° MAX	S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
RESET CHARACTERISTICS	L67 15A 125, 250 OR 480 VAC 1/4HP 125 VAC, 1/2HP 250 VAC 1/2A 125 VDC, 1/4A 250 VDC	ONE PLACE (.0) ± .030
OPERATING FORCE — — — — 12-36 OZ	CE 1.5A, 240Vac	TWO PLACE (.00) ± .015
OVERTRAVEL — — — — .141 MIN		THREE PLACE (.000) ± .005
SWITCH - BASIC REPLACEMENT — — — BZ-RX61		ANGLES ±
		WEIGHT .78 LB

ANSI Y14.5M-1982 APPLIES