
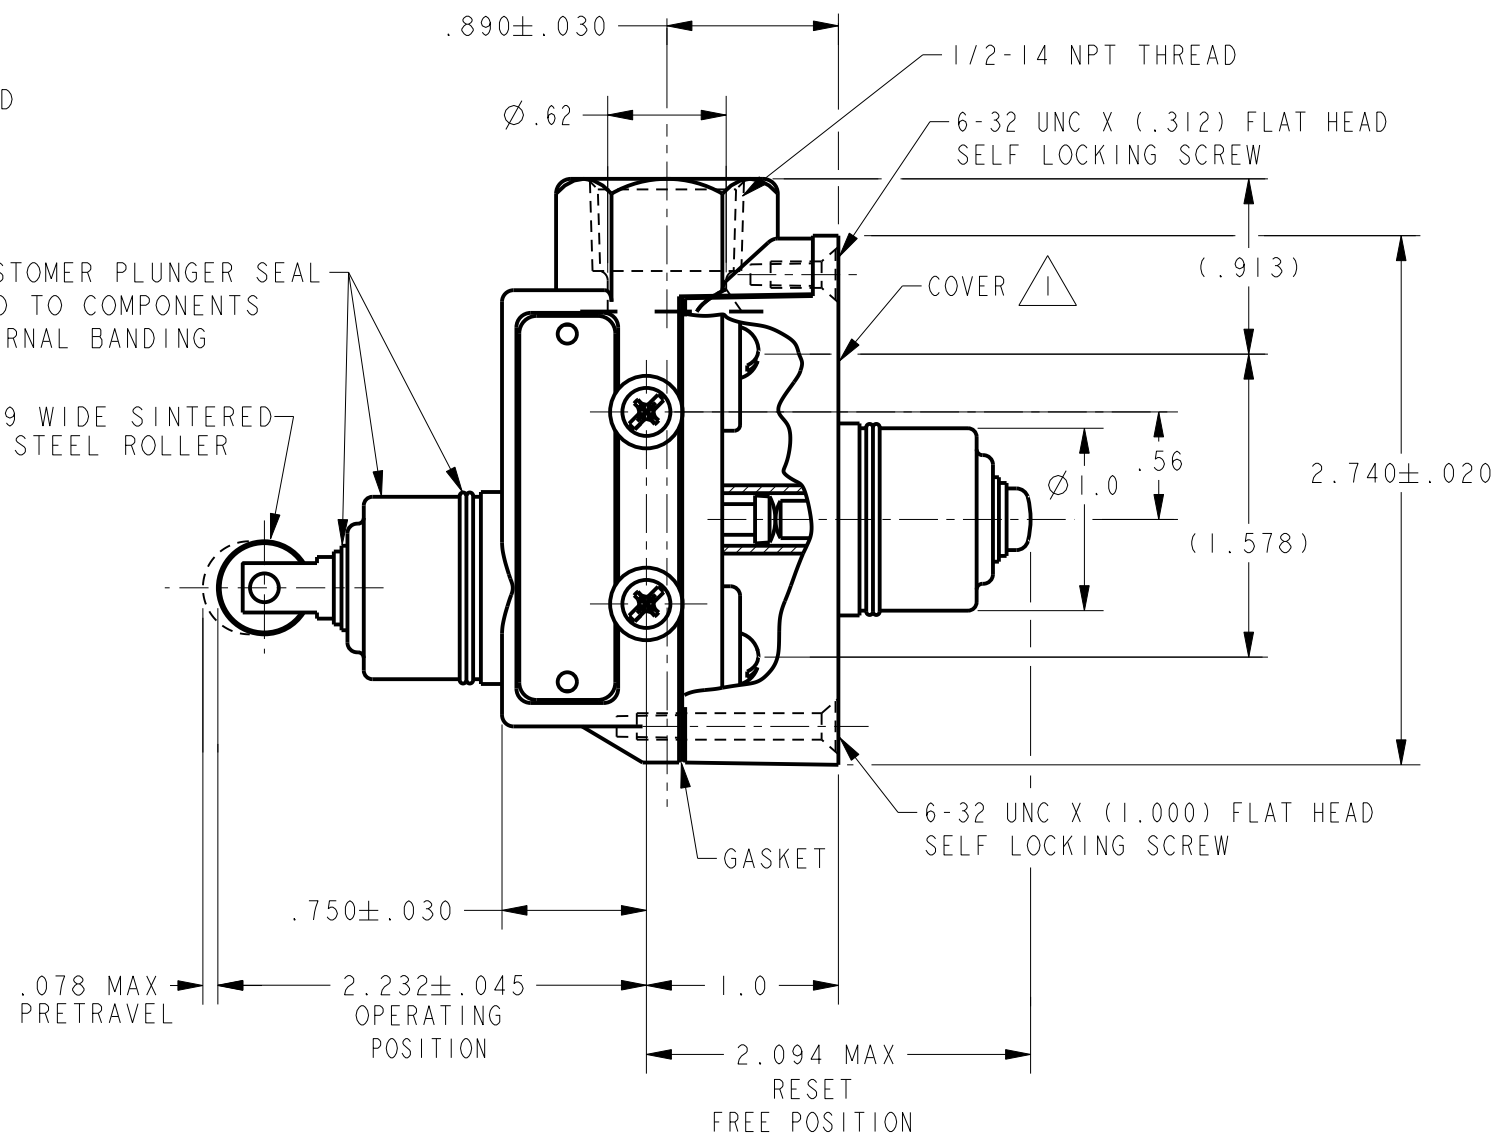
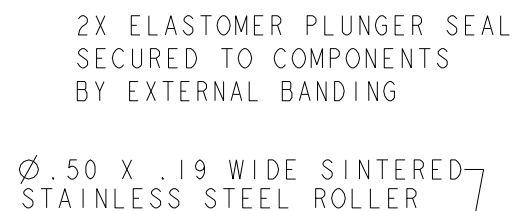




THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH		THIRD ANGLE PROJECTION 
CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ----- 21-56 OZ OVERTRAVEL ----- .187 MIN	CONTACT ARRANGEMENT S P D T MAINTAINED CONTACT	DO NOT SCALE PRINT
RESET CHARACTERISTICS	L67 15A-125, <u>250</u> OR 480 VAC 1/4 HP-125 VAC; 1/2 HP- <u>250</u> VAC 1/2A-125 VDC; 1/4A-250 VDC CE 1.5A, 240Vac  	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
OPERATING FORCE ----- 6 OZ MIN		WEIGHT .70 LB

NOTE

	FURNISHED UNASSEMBLED
2 -	3X 3-48 UNC X (.140) ROUND HEAD TERMINAL SCREW
3 -	SEAL RATING: NEMA 1,3,4 IP56

ANSI Y14.5M-1982 APPLIES