

MICRO SWITCH

FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91928

SWITCH - ENCLOSED

CATALOG LISTING
BZE6-RNX12

BZE6-RNX12

DRAWING
NUMBER

ISSUE

REPLACES

RELEASE NO. PR-15440

29AUG07

PSR

CHECK

23NOV05

BP

CHECK

25 JAN 87

14 SEP 92

16 MAY 94

CHECK

30 JAN 81

WJM


FO-3218-1-A

DRAWN

REVISIONS

L	0033014	BS	29AUG07
B	C055989	CJH	8 NOV 84
C	C054958	GJW	8 JAN 85
D	C055977	OSB	22 JAN 86
E	RE-INST	PR-15440	25 FEB 87
F	C072618	LJF	14 SEP 92
G	C07779-E	DLT	16 MAY 94
H	0017057	VKR	23NOV05
J	0023923	RKP	24AUG06
K	0025947	KML	27OCT06


6-32 UNC X 1.750 REF ROUND
HEAD MACHINE SCREW(2)

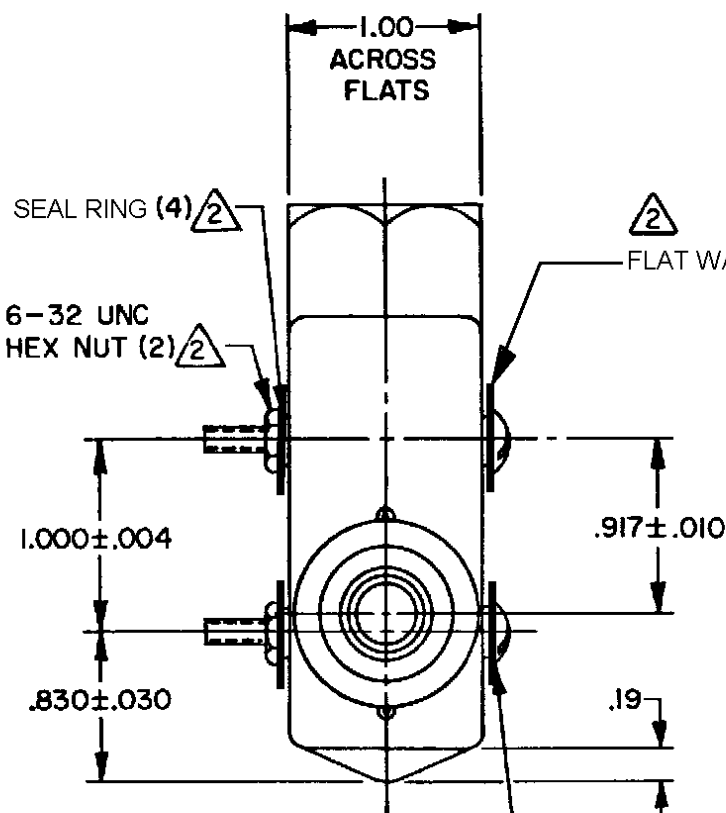

.078 MAX
PRETRAVEL

1.718±.030
OPERATING
POSITION

2.094 MAX
RESET
FREE POSITION

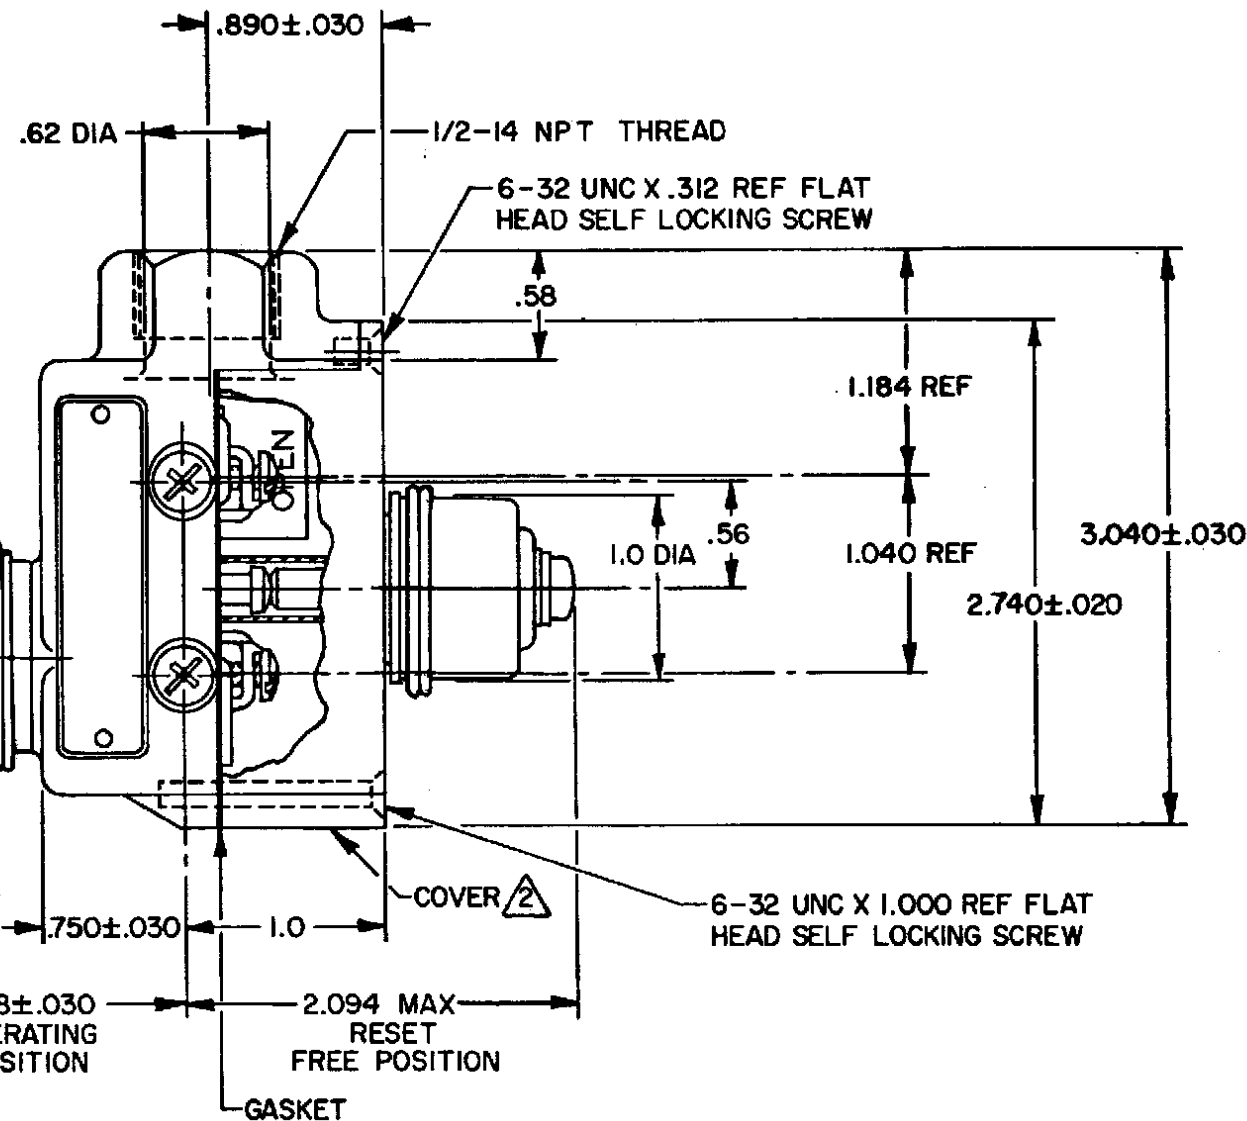

NOTES-

- 1 - 6-32 UNC X .218 REF BINDING HEAD TERMINAL SCREW (3)
- 2 - FURNISHED UNASSEMBLED
- 3 - SEAL RATING: NEMA1,3,4
IP66

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ----- 22-44 OZ	CONTACT ARRANGEMENT SPDT MAINTAINED CONTACT	DO NOT SCALE PRINT
OVERTRAVEL ----- .188 MIN	15A-125, 250 OR 480 VAC 1/4 HP-125 VAC; 1/2 HP-250 VAC 1/2A-125 VDC; 1/4A-250 VDC CODE L67	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES 2
RESET CHARACTERISTICS	CE 1.5A, 240Vac	WEIGHT .70 LB
OPERATING FORCE ----- 12 OZ MIN		
BASIC SWITCH REPLACEMENT --- BZ-RNX782		