

MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
BZE6-RQ71

BZE6-RQ71

M

DRAWING
NUMBER

108

ISSUE

108

PSR

29AUG07

CHECK

77

ROB

2 SEP 77

CJH

2 MAY 84

C

0054958

TSK

26 FEB 85

D

0072618

LJF

14 SEP 92

E

0078647

DAW

21 SEP 94

F

0016894

KRB

10 NOV 05

G

0033014

BS

29AUG07

REPLACES

29AUG07

PSR

CHECK

77

ROB

2 SEP 77

CJH

2 MAY 84

C

0054958

TSK

26 FEB 85

D

0072618

LJF

14 SEP 92

E

0078647

DAW

21 SEP 94

F

0016894

KRB



10 NOV 05

G

0033014

BS

29AUG07

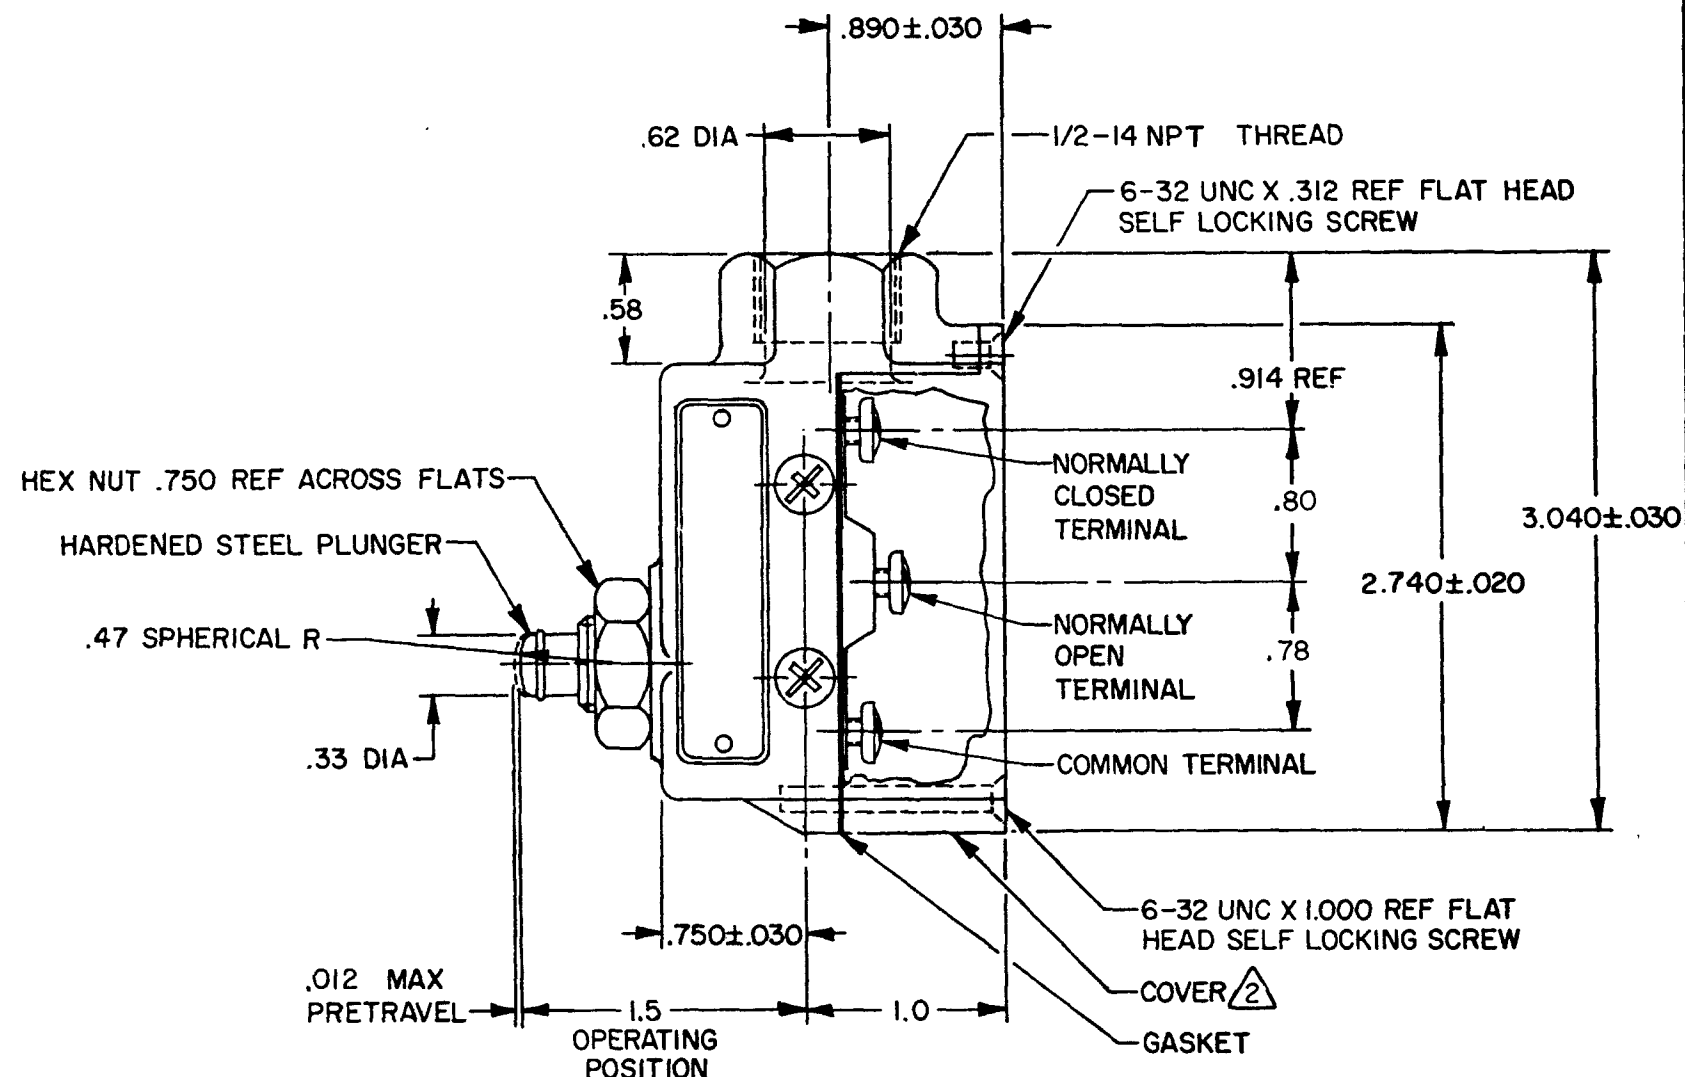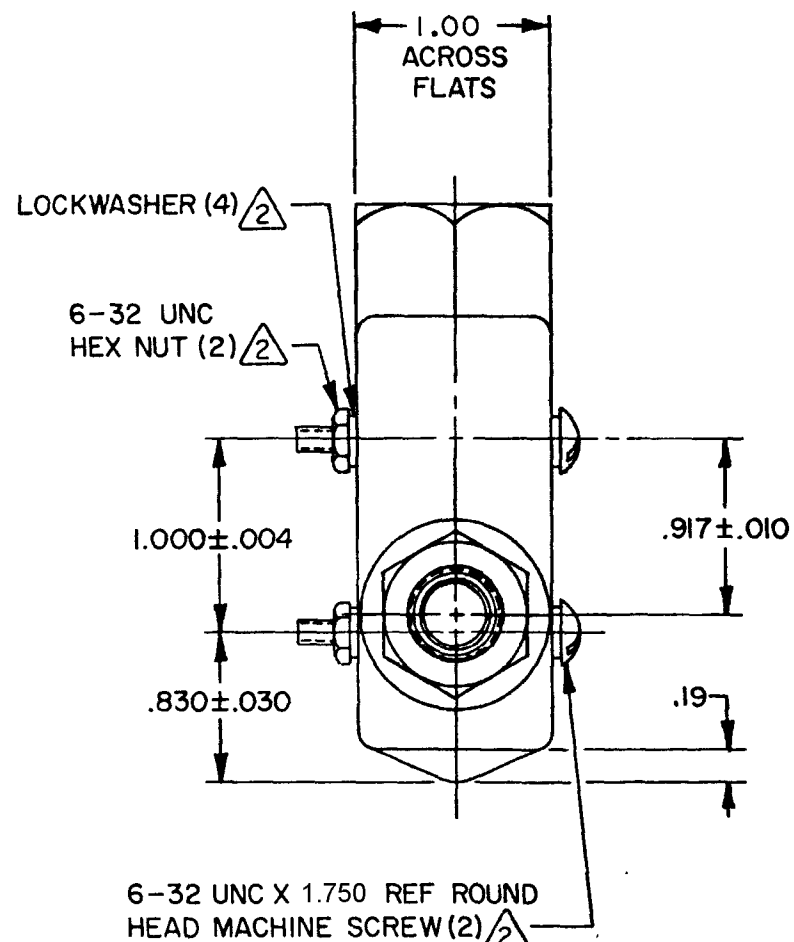

NOTES-

- 1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3)
- 2 - FURNISHED UNASSEMBLED
- 3 - ELECTRICAL RATING SHOWN APPLIES TO BASIC SWITCH BUT IS NOT SHOWN ON PRODUCT NAMEPLATE
- 4 - SEAL RATING: NEMA 1
IP40

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ----- 4 OZ MAX	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE ----- 2 1/2 OZ MIN	L95	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL ----- .0005 MAX	10A 125, 250 OR 480 VAC	TOLERANCES ARE:
OVERTRAVEL ----- .219 MIN	1/8HP 125 VAC, 1/4 HP 250 VAC	ONE PLACE (.0) ±.030
BASIC SWITCH REPLACEMENT ----- BZ-RQ760	(3)	TWO PLACE (.00) ±.015
	CE 1.5A, 240 Vac	THREE PLACE (.000) ±.005
		ANGLES
		WEIGHT .53 LB

RASTER
FO-52851-A

DRAWN

CHECK

29 AUG 77

AL