

MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91928

SWITCH - ENCLOSED

CATALOG LISTING
BZE6-RQ81X2

BZE6-RQ81X2

M

DRAWING
NUMBER

ISSUE

7

3

REPLACES

PR-11027

RELEASE NO.

29AUG07

PSR

CHECK

10 NOV 05

RJ

CHECK

10 NOV 05

RJ

CHECK

10 NOV 05

RJ

CHECK

10 NOV 05

RJ

CHECK

10 NOV 05

RJ

CHECK

10 NOV 05

RJ

CHECK

10 NOV 05

RJ

CHECK

REVISIONS

A C053191F

TSK

13 APR 84

B C055989

CJH

8 NOV 84

C C054958

TSK

26 FEB 85

D C072618

LJF

14 SEP 92

E 0016894

KRB

10 NOV 05

F 0033014

BS

29AUG07



RASTER
FO-8285 I-B

DRAWN

WJM

15 MAR 82

CHECK

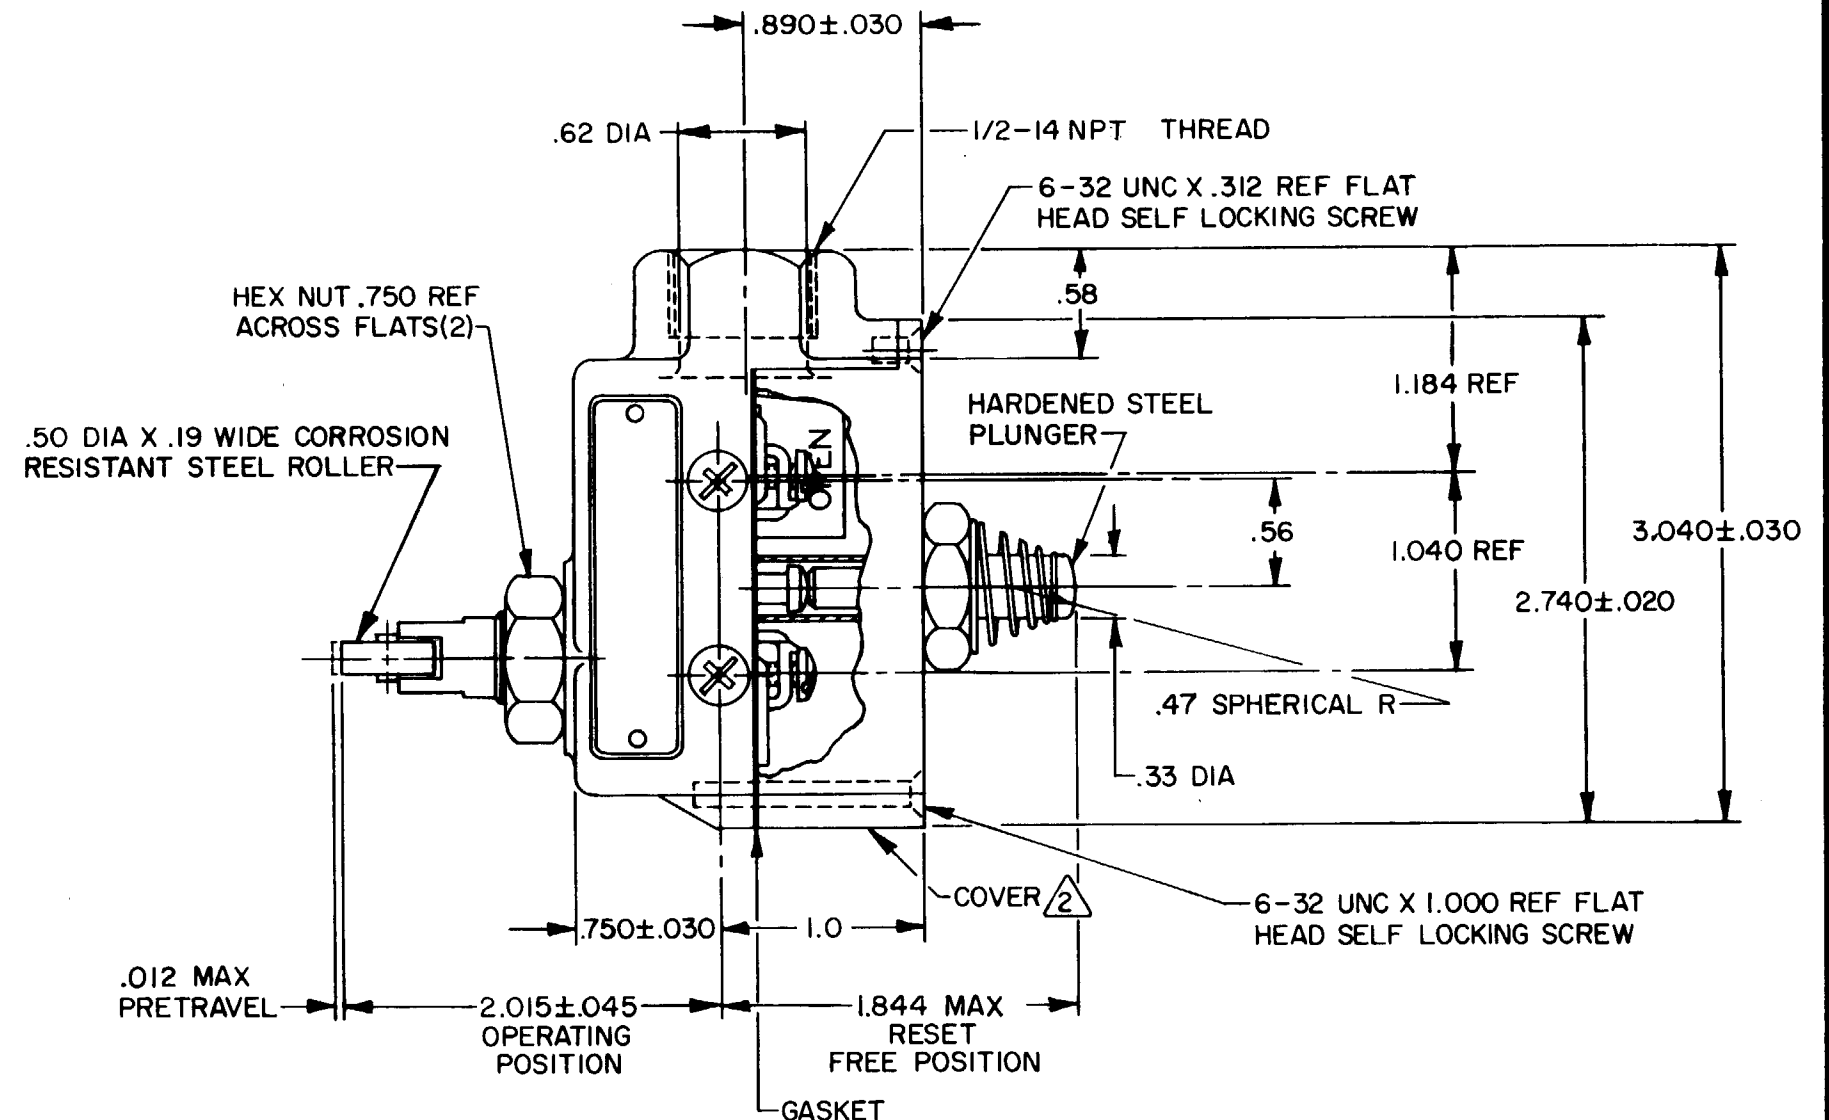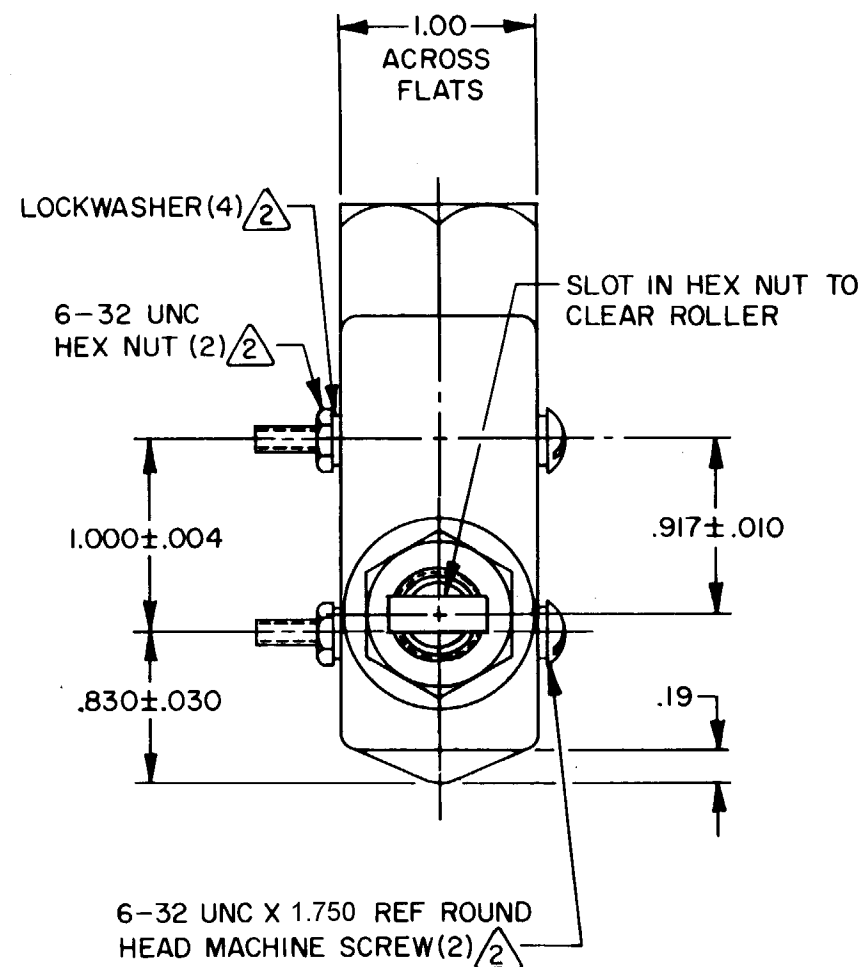

NOTES-

- 1 - 6-32 UNC X .218 REF BINDING HEAD TERMINAL SCREW (3)
(2) FURNISHED UNASSEMBLED
3 - SEAL RATING: NEMA 1
IP40

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 6-9 1/2 OZ
OVERTRAVEL ----- .140 MIN

RESET CHARACTERISTICS

OPERATING FORCE ----- 8 OZ MIN
BASIC SWITCH REPLACEMENT--BZ-RQX785

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT MAINTAINED CONTACT

15A-125, 250 OR 480 VAC
1/4 HP-125 VAC; 1/2 HP-250 VAC
1/2A-125 VDC; 1/4A-250 VDC
CODE L67

CE 1.5A, 240 Vac



RL

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/64	
ONE PLACE	X,X	0.001	0.001
TWO PLACES	X,X,X	0.0005	0.0005
THREE PLACES	X,X,X,X	0.0001	0.0001
ANGLES			

SI METRIC ☐ US CUSTOMARY ☒

DESIGN UNITS

THIRD ANGLE PROJECTION



WEIGHT