

MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
BZE6-RQ9

BZE6-RQ9

M

DRAWING
NUMBER

9

8

ISSUE

8

REVISIONS

A CO
38200-B

T M M
8 SEPT 77

B CO53191-G

C J H
2 MAY 84

C CO55989

J A S
6 NOV 84

D CO54958

G J W
12 MAR 85

E CO72618

L J P
11 SEP 92

F 0016894

K R B
10 NOV 05

G 0033014

B S
29 AUG 07

RASTER
FO-92851-A

DRAWN

REPLACES

RELEASE NO.

29AUG07

PSR

CHECK

77

ROB

CHECK

77

SEP

77

SEP

77

SEP

77

SEP

77

SEP

77

SEP

77

SEP

77

SEP

77

SEP

77

SEP



77

SEP

77

SEP

77

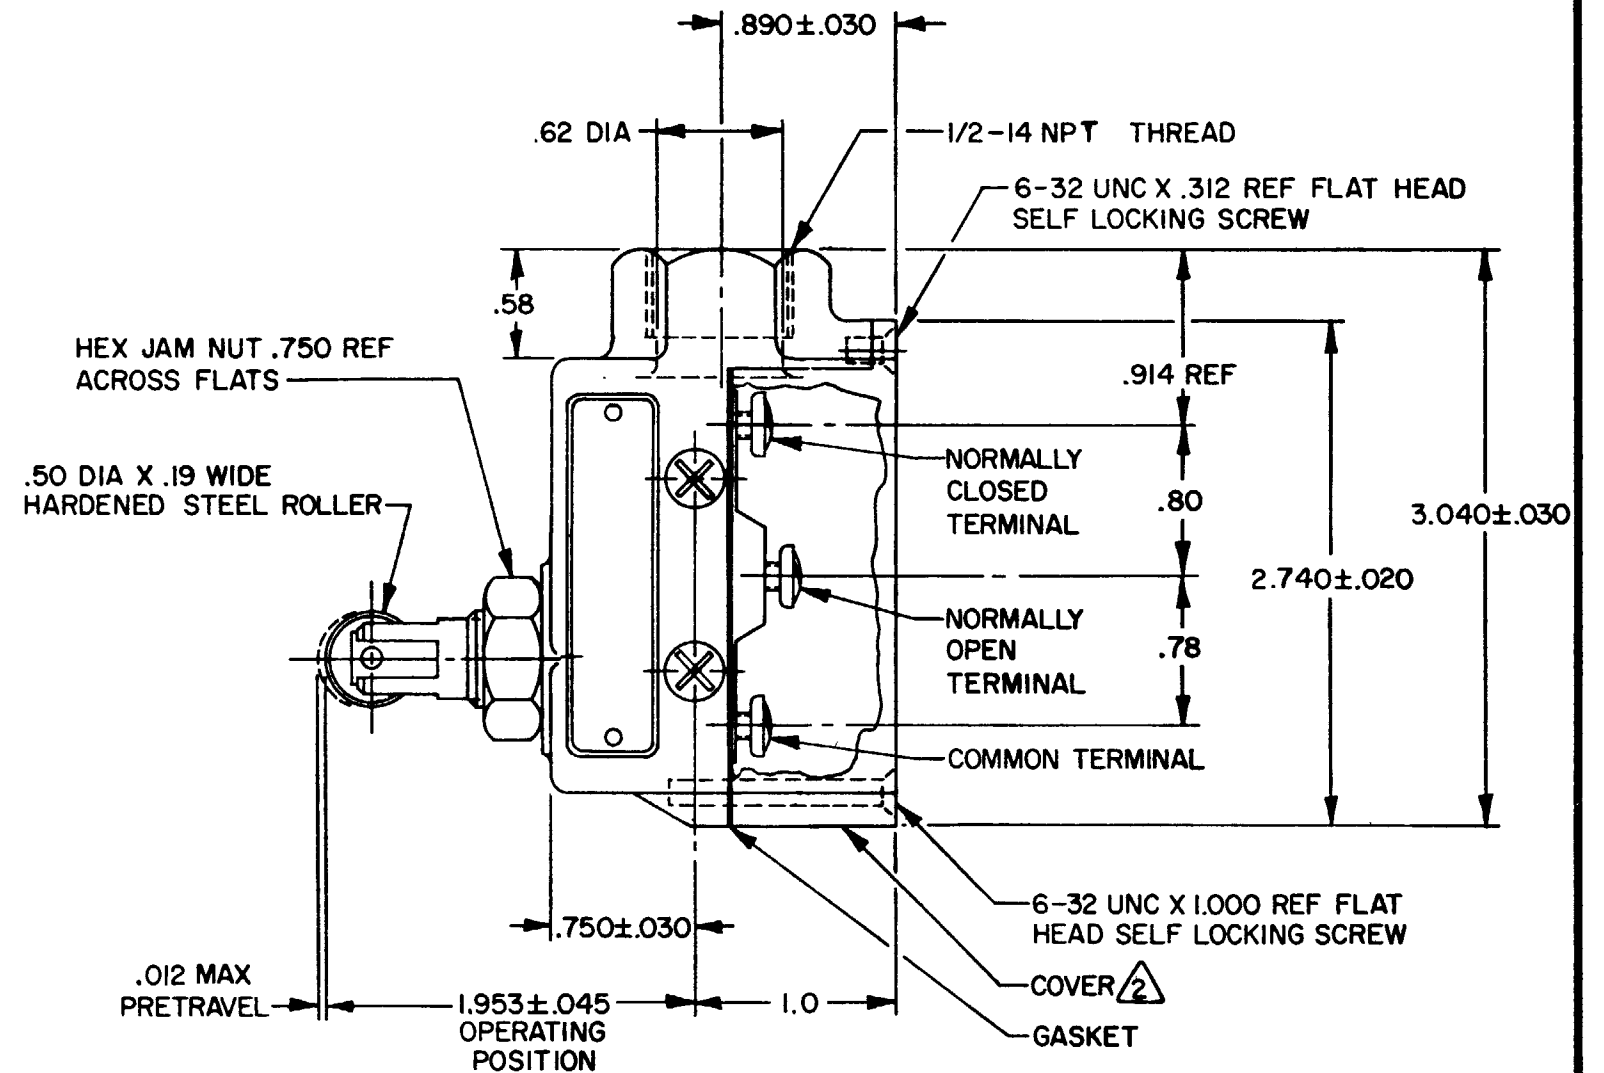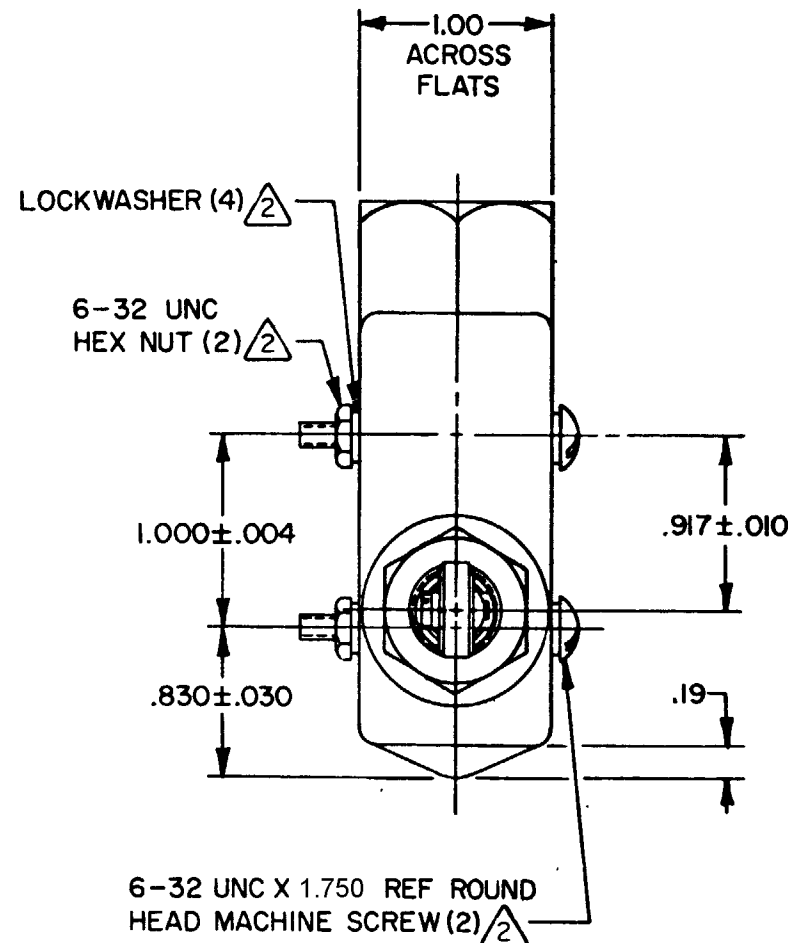

NOTES -

- 1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3)
② FURNISHED UNASSEMBLED
3 - SEAL RATING: NEMA 1
IP40

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE — 6-9 1/2 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE — 4 OZ MIN		UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL — .0005 MAX	CODE L103	TOLERANCES ARE:
OVERTRAVEL — .140 MIN	15A-125, 250 OR 480 VAC	ONE PLACE (.0)
BASIC SWITCH REPLACEMENT — BZ-RQ69	1/8 HP-125 VAC; 1/4 HP-250 VAC	TWO PLACE (.00)
	1.5A, 240 Vac	THREE PLACE (.000)
		ANGLES
		WEIGHT .56 LB