
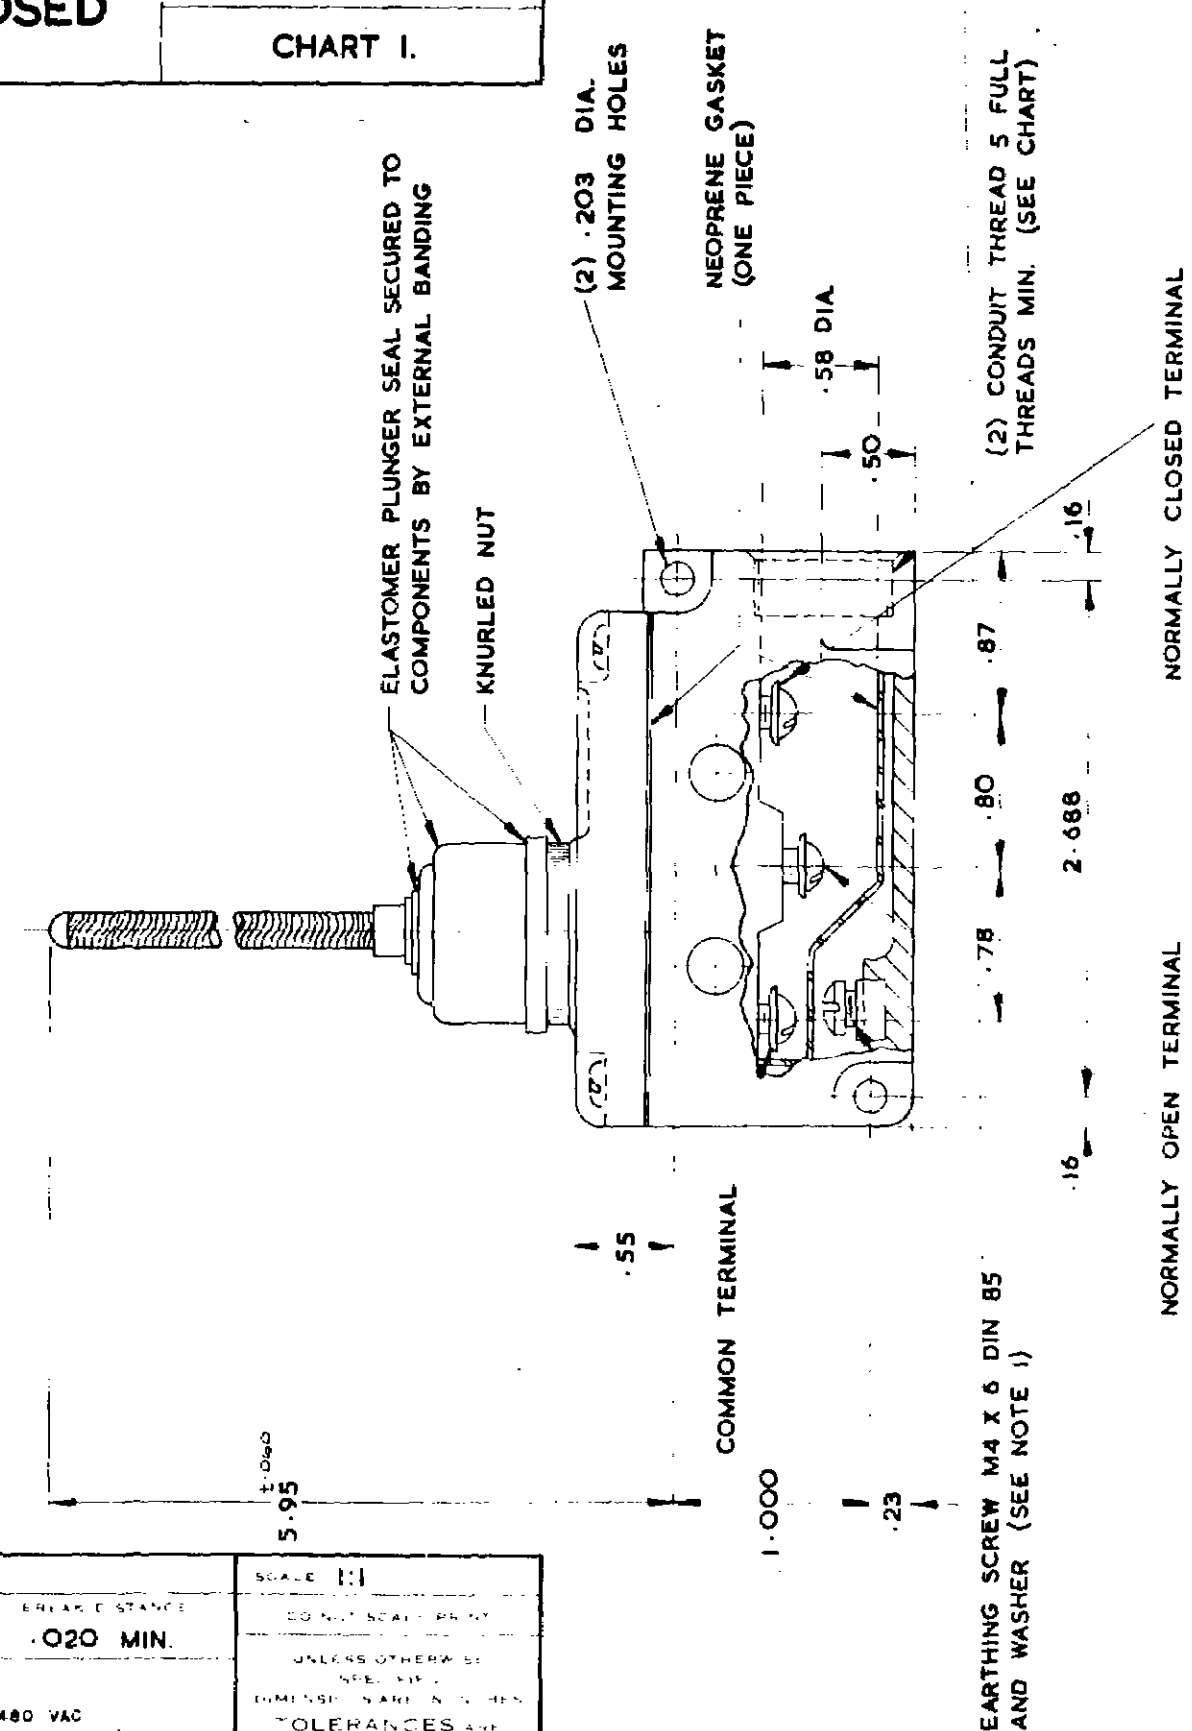


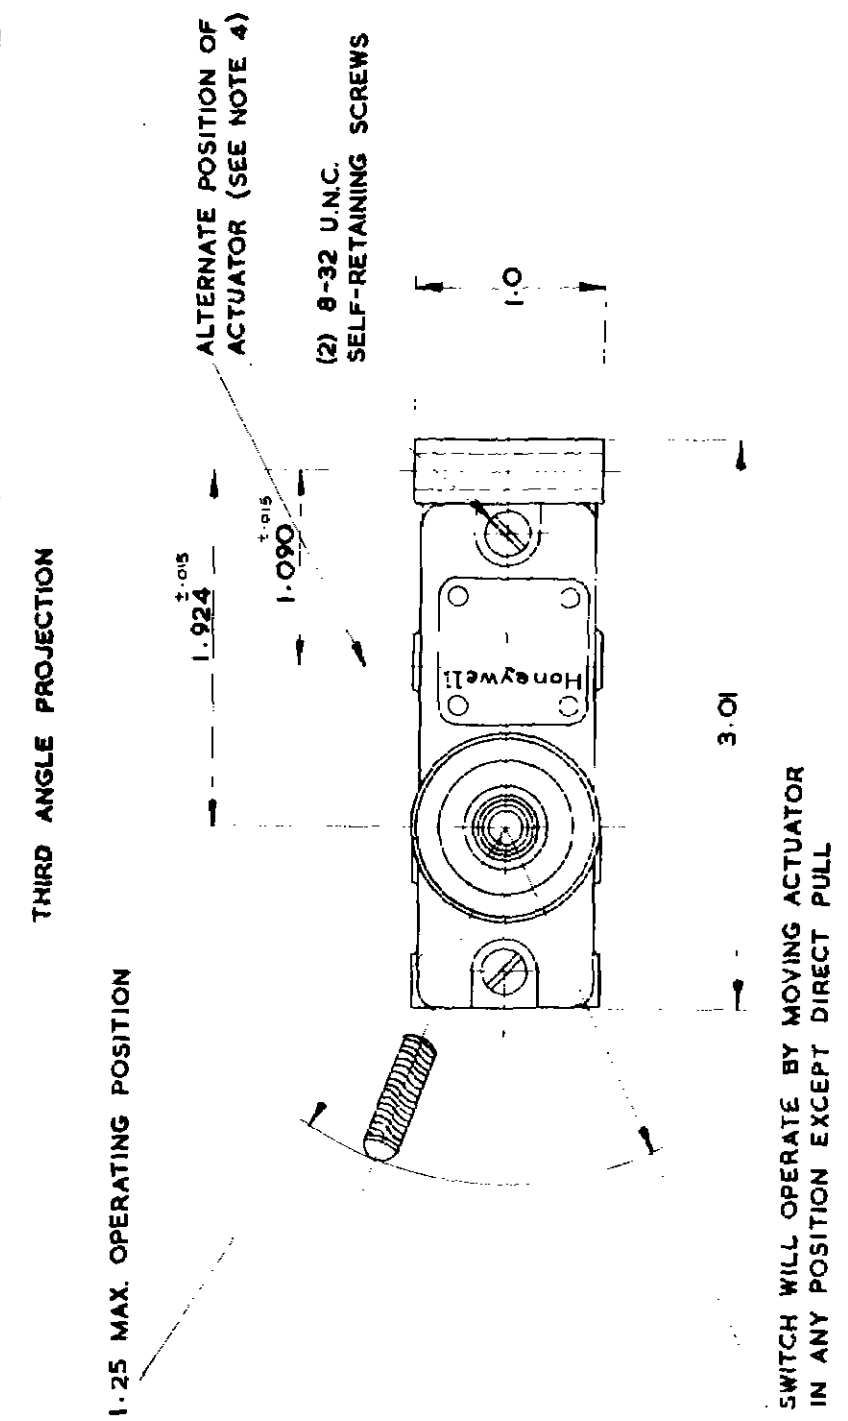

NOTE

- 1-EARTHING SCREW AND WASHER PROVIDED ON -PG. LISTINGS ONLY
- 2-ALUMINIUM ENCLOSURE FINISHED WITH GREY PAINT
- 3-6-32 U.N.C. X .219 REF. TERMINAL SCREWS AND CUPWASHERS
- 4-COVER, PLUNGER AND BASIC SWITCH MAY BE REMOVED AS A UNIT AND MOUNTED OPPOSITE HAND TO THAT SHOWN

CHARACTERISTICS		ELECTRICAL DATA		SCALE 1:1
OPERATING POSITION	15° MAX.	CONTACT ARRANGEMENT	BREAK DISTANCE	DO NOT SCALE PLAYS
		S.P.D.T.	0.020 MIN.	UNLESS OTHERWISE SPECIFIED
		12A-12B, 250 OR 480 VAC 1/2 A-125 VDC, 1/4 A-250 VDC		DIMENSIONS ARE IN INCHES
SWITCH BASIC REPLACEMENT BZ-2RQ-A2N9				TOLERANCES ARE: ONE PLACE .100 TWO PLACE .005 THREE PLACE .001 ANGLES
				WEIGHT
HONEYWELL CONTROLS LTD., GREENFORD MIDDLESEX & NEWHOUSE LANARKSHIRE				

CATALOGUE LISTING	ISSUE	CHECK BY	RELEASE NO.	CONDUIT THREAD	REMARKS
BZE7 - 2RN18	2		1916- O69	1/2 - 14 N.P.S.M.	
BZE7 - 2RN18 - C	2		CN- 40744	20 MM TO BS 4568	
BZE7 - 2RN18 - PG	2		1916- O69	P.G. 13,5	
BZE7-2RN18-PGII	1		MS- 1686	PG II	