





MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
BZLN-200-LH

m

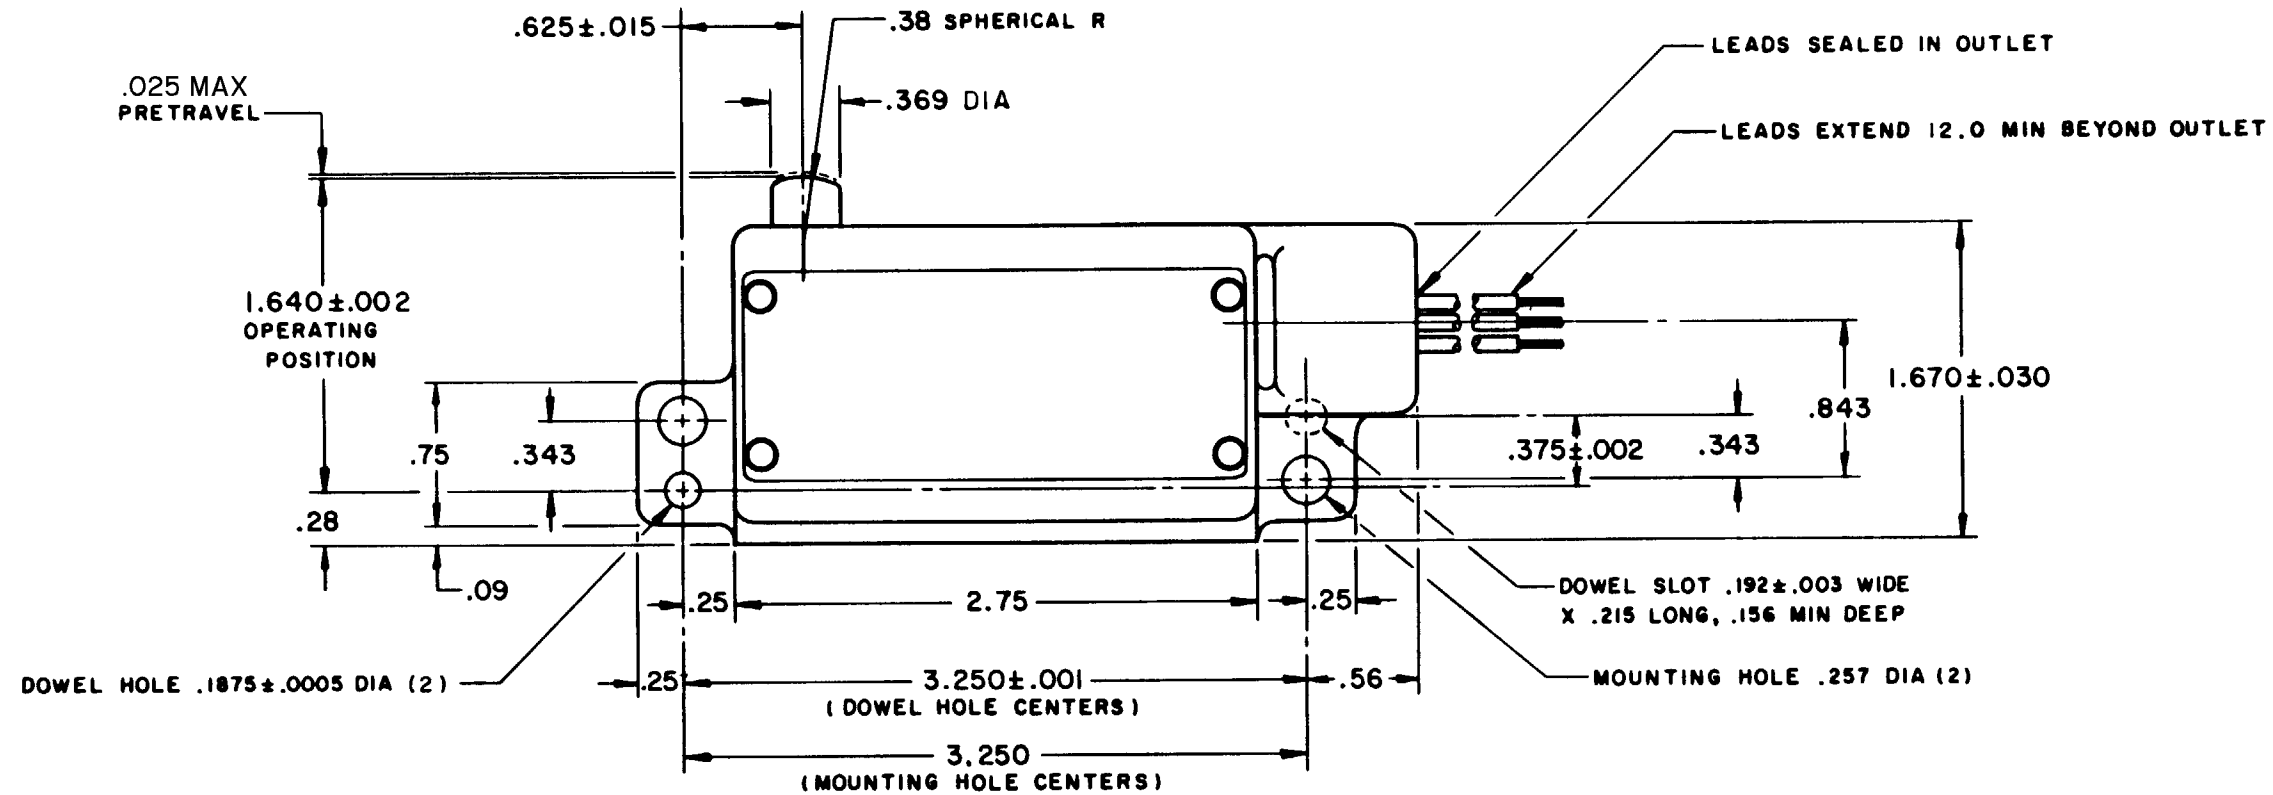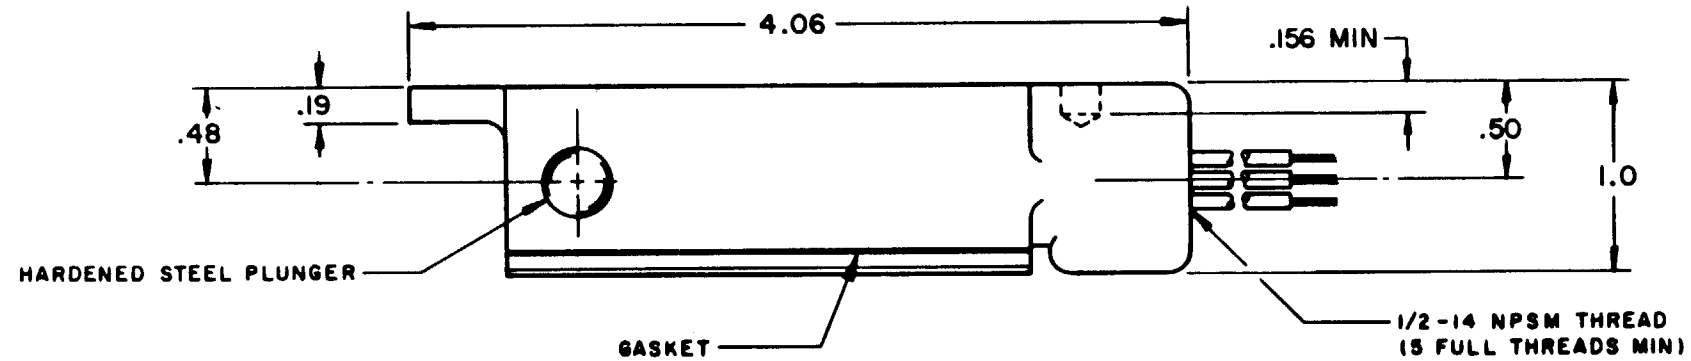

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS
OPERATING FORCE — — — 5 LB MAX
RELEASE FORCE — — — 1 LB MIN
DIFFERENTIAL TRAVEL — — .003 MAX
OVERTRAVEL — — — .203 MIN

ELECTRICAL DATA
CONTACT ARRANGEMENT S P D T
-L96- 15 A-125, 250, OR 480 VAC 1/2 A-125 VDC; 1/4 A-250 VDC 1/8 HP-125 VAC; 1/4 HP-250 VAC

SCALE FULL
DO NOT SCALE PRINT
UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.008
ANGLES 2
WEIGHT .720 LB PLUS LEADS

WIRING CONNECTIONS -
COMMON - BLACK LEAD
NORMALLY OPEN - BLUE LEAD
NORMALLY CLOSED - RED LEAD

BZLN-200-LH

DRAWING NUMBER

ISSUE

REVISIONS
A CO 11950 M B F 10 NOV 64
B CO 50714 G J W 29 APR 82
C CO 55988 M A M 31 OCT 84
D CO-81715 J A K 26 SEP 95

FORMTEK