

BZLN-5-RH

M

DRAWING
NUMBER

ISSUE

9

1

2

REVISIONS

A	CO19597	MBF	9 NOV 64
B	CO50714	GJW	28 APR 82
C	CO55988	MAM	31 OCT 84
D	CO66766	MAM	5 APR 90
E	CO-81715	JAK	26 SEP 95

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64

REPLACES

RELEASE NO.


CHECK

CHECK

CHECK


CHECK

CHECK

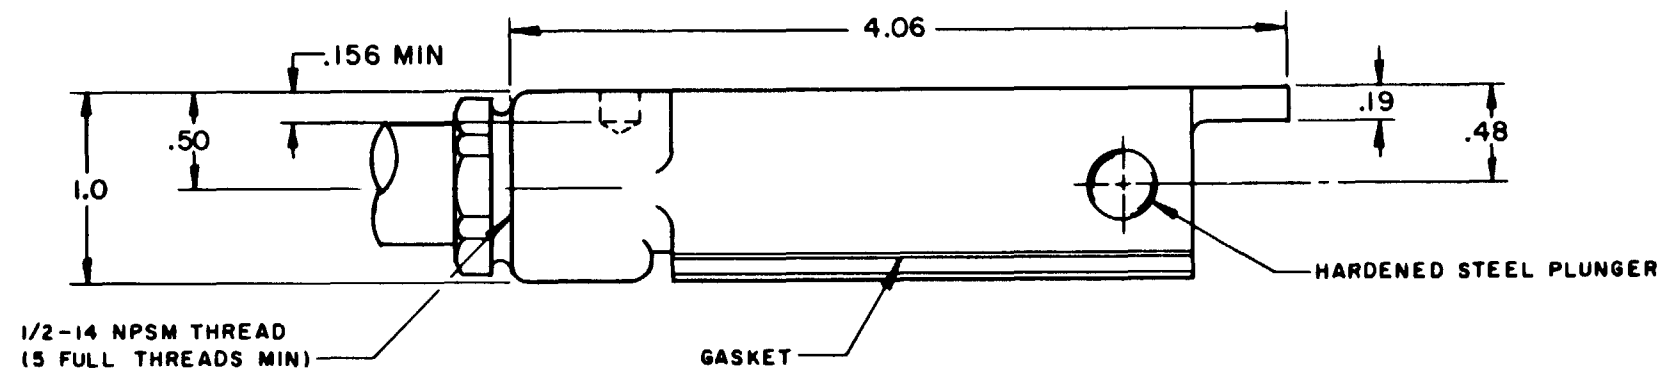

PACKING GLAND NUT .875 REF
ACROSS FLATS X .19 THICK

LEAD EXTENDS 60.0 MIN
BEYOND OUTLET

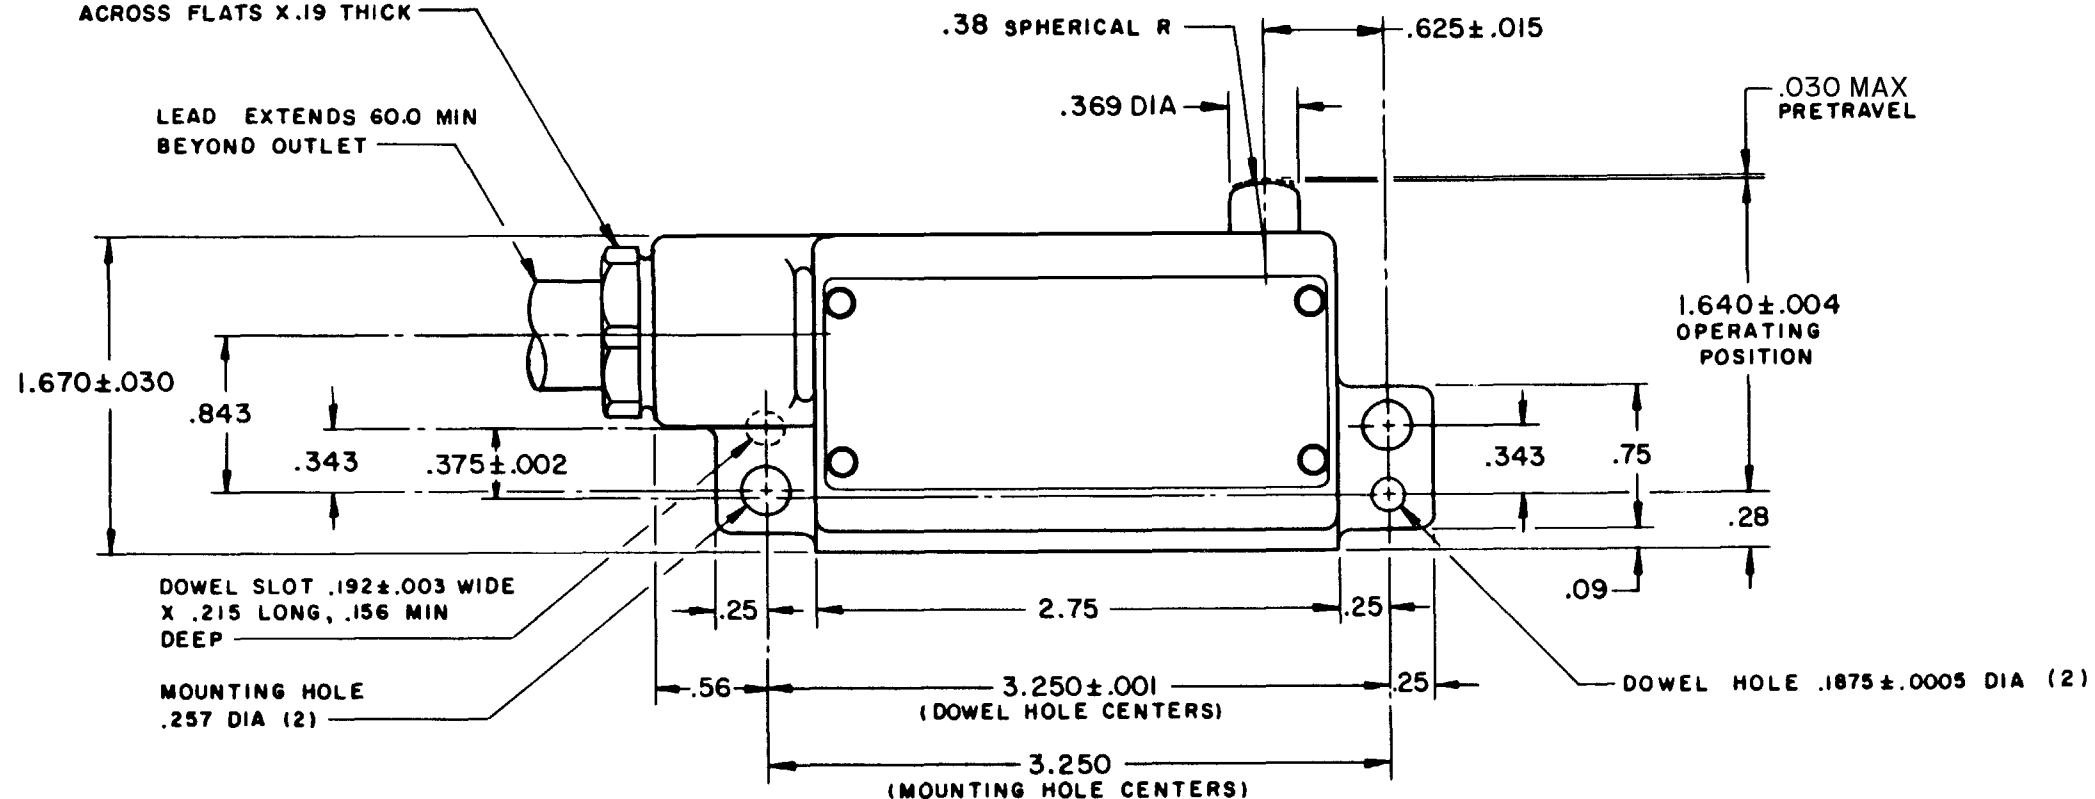

DOWEL SLOT .192 ± .003 WIDE
X .215 LONG, .156 MIN
DEEP

MOUNTING HOLE
.257 DIA (2)

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — — — 5 LB MAX

RELEASE FORCE — — — — 1 LB MIN

DIFFERENTIAL TRAVEL — — — .004 MAX

OVERTRAVEL — — — — .203 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L257

10A 125, 250 OR 480 VAC
1/8 HP 125 VAC, 1/4 HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

WIRING CONNECTIONS—

COMMON — BLACK LEAD
NORMALLY OPEN — RED LEAD
NORMALLY CLOSED — WHITE LEAD
DISCONNECTED — GREEN LEAD

FORMTEK