MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
BZLN-LH15

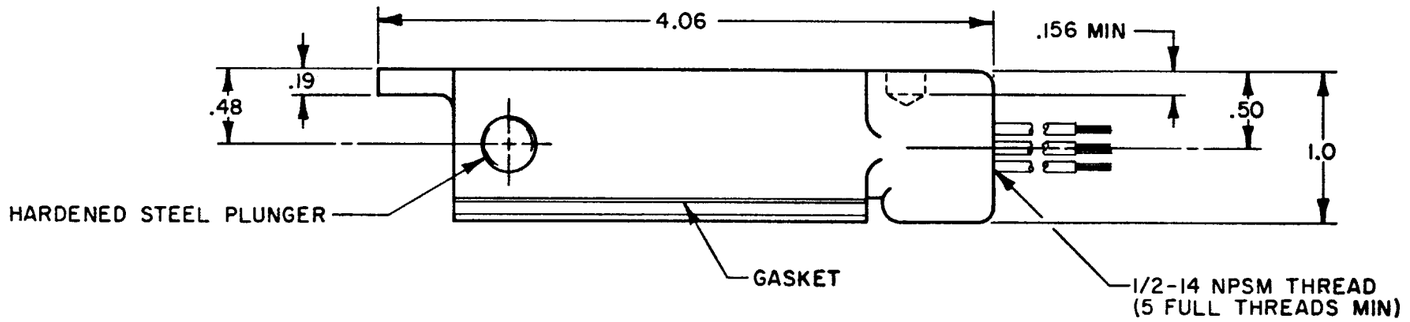

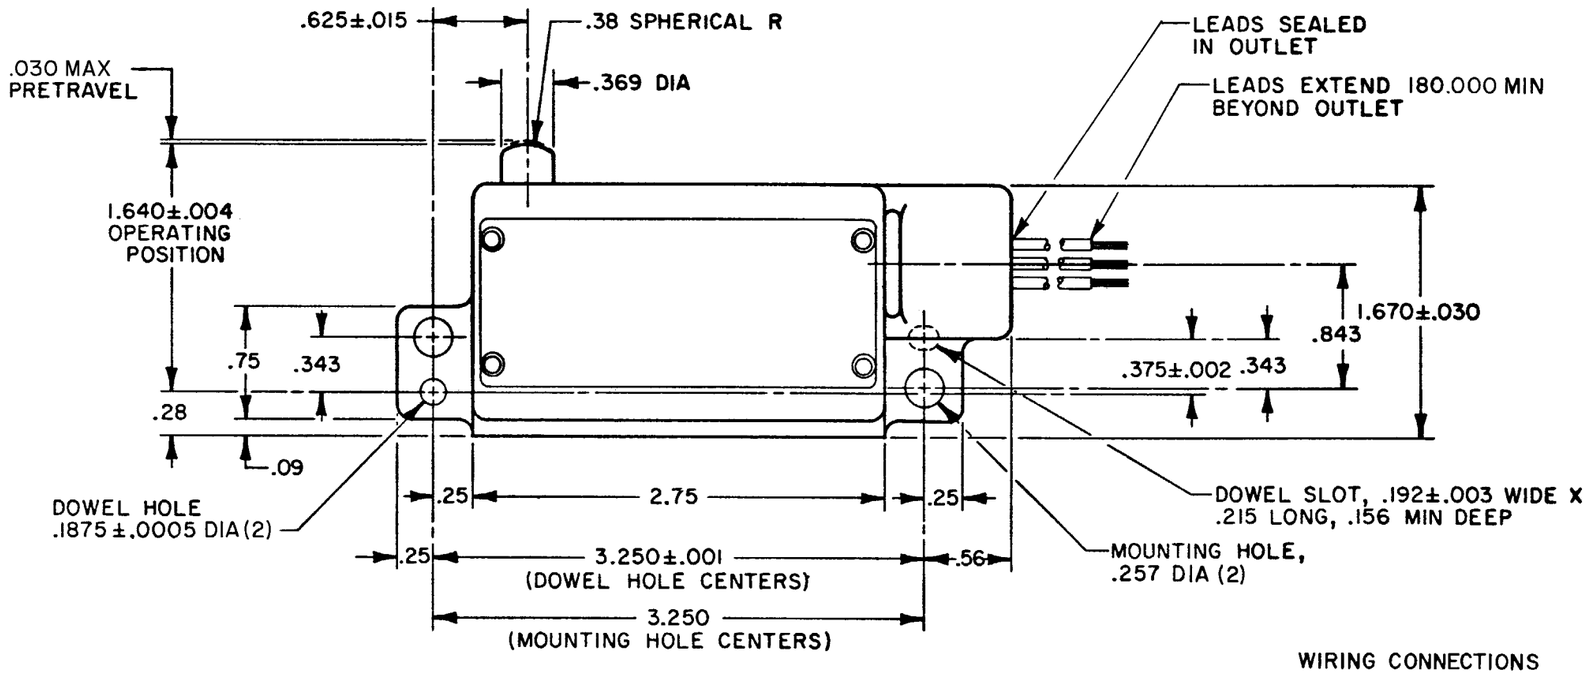

WIRING CONNECTIONS
COMMON - BLACK LEAD
NORMALLY OPEN - BLUE LEAD
NORMALLY CLOSED - RED LEAD

THIS DRAWING COVERS A PROPPIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	
OPERATING FORCE	5 LB MAX
RELEASE FORCE	1 LB MIN
DIFFERENTIAL TRAVEL	.004 MAX
OVERTRAVEL	.203 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

-L96- 15 A-125, 250, OR 480 VAC
1/2 A-125 VDC; 1/4 A-250 VDC
1/8 HP-125 VAC; 1/4 HP-250 VAC

SCALE FULL
DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/.04		
ONE PLACE	X.X	0.4/.016	X.X	0.8/.03
TWO PLACES	X.XX	0.15/.008	X.XX	0.38/.015
THREE PLACES			X.XXX	0.13/.005
ANGLES				

DESIGN UNITS ☐ SI METRIC ☒ US CUSTOMARY

THIRD ANGLE PROJECTION

WEIGHT .720 LB PLUS LEADS

BZLN-LH15 | M | DRAWING NUMBER | ISSUE 4 | REPLACES | RELEASE NO. PR-9648

REVISIONS

A	CO 50714	CHECK
G J W 27 APR 82		
B	CO 55988	
M A M 31 OCT 84		
C	CO-81715	CHECK
J A K 26 SEP 95		
		CHECK
		18 DEC 80 C E B
		CHECK
		16 DEC 80 JMJ DRAWN

FORMTEK