



MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
BZLN-RH3

BZLN-RH3

M

DRAWING
NUMBER

8

7

ISSUE

8

REVISIONS

A	CO19597
M B F	5 NOV 64
B	CO50714
G J W	27 APR 82
C	CO55988
M A M	31 OCT 84
D	CO-81715
J A K	26 SEP 95

CHECK

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64

13 NOV 64


FORMTEK

DRAWN

M B F

5 NOV 64

CHECK

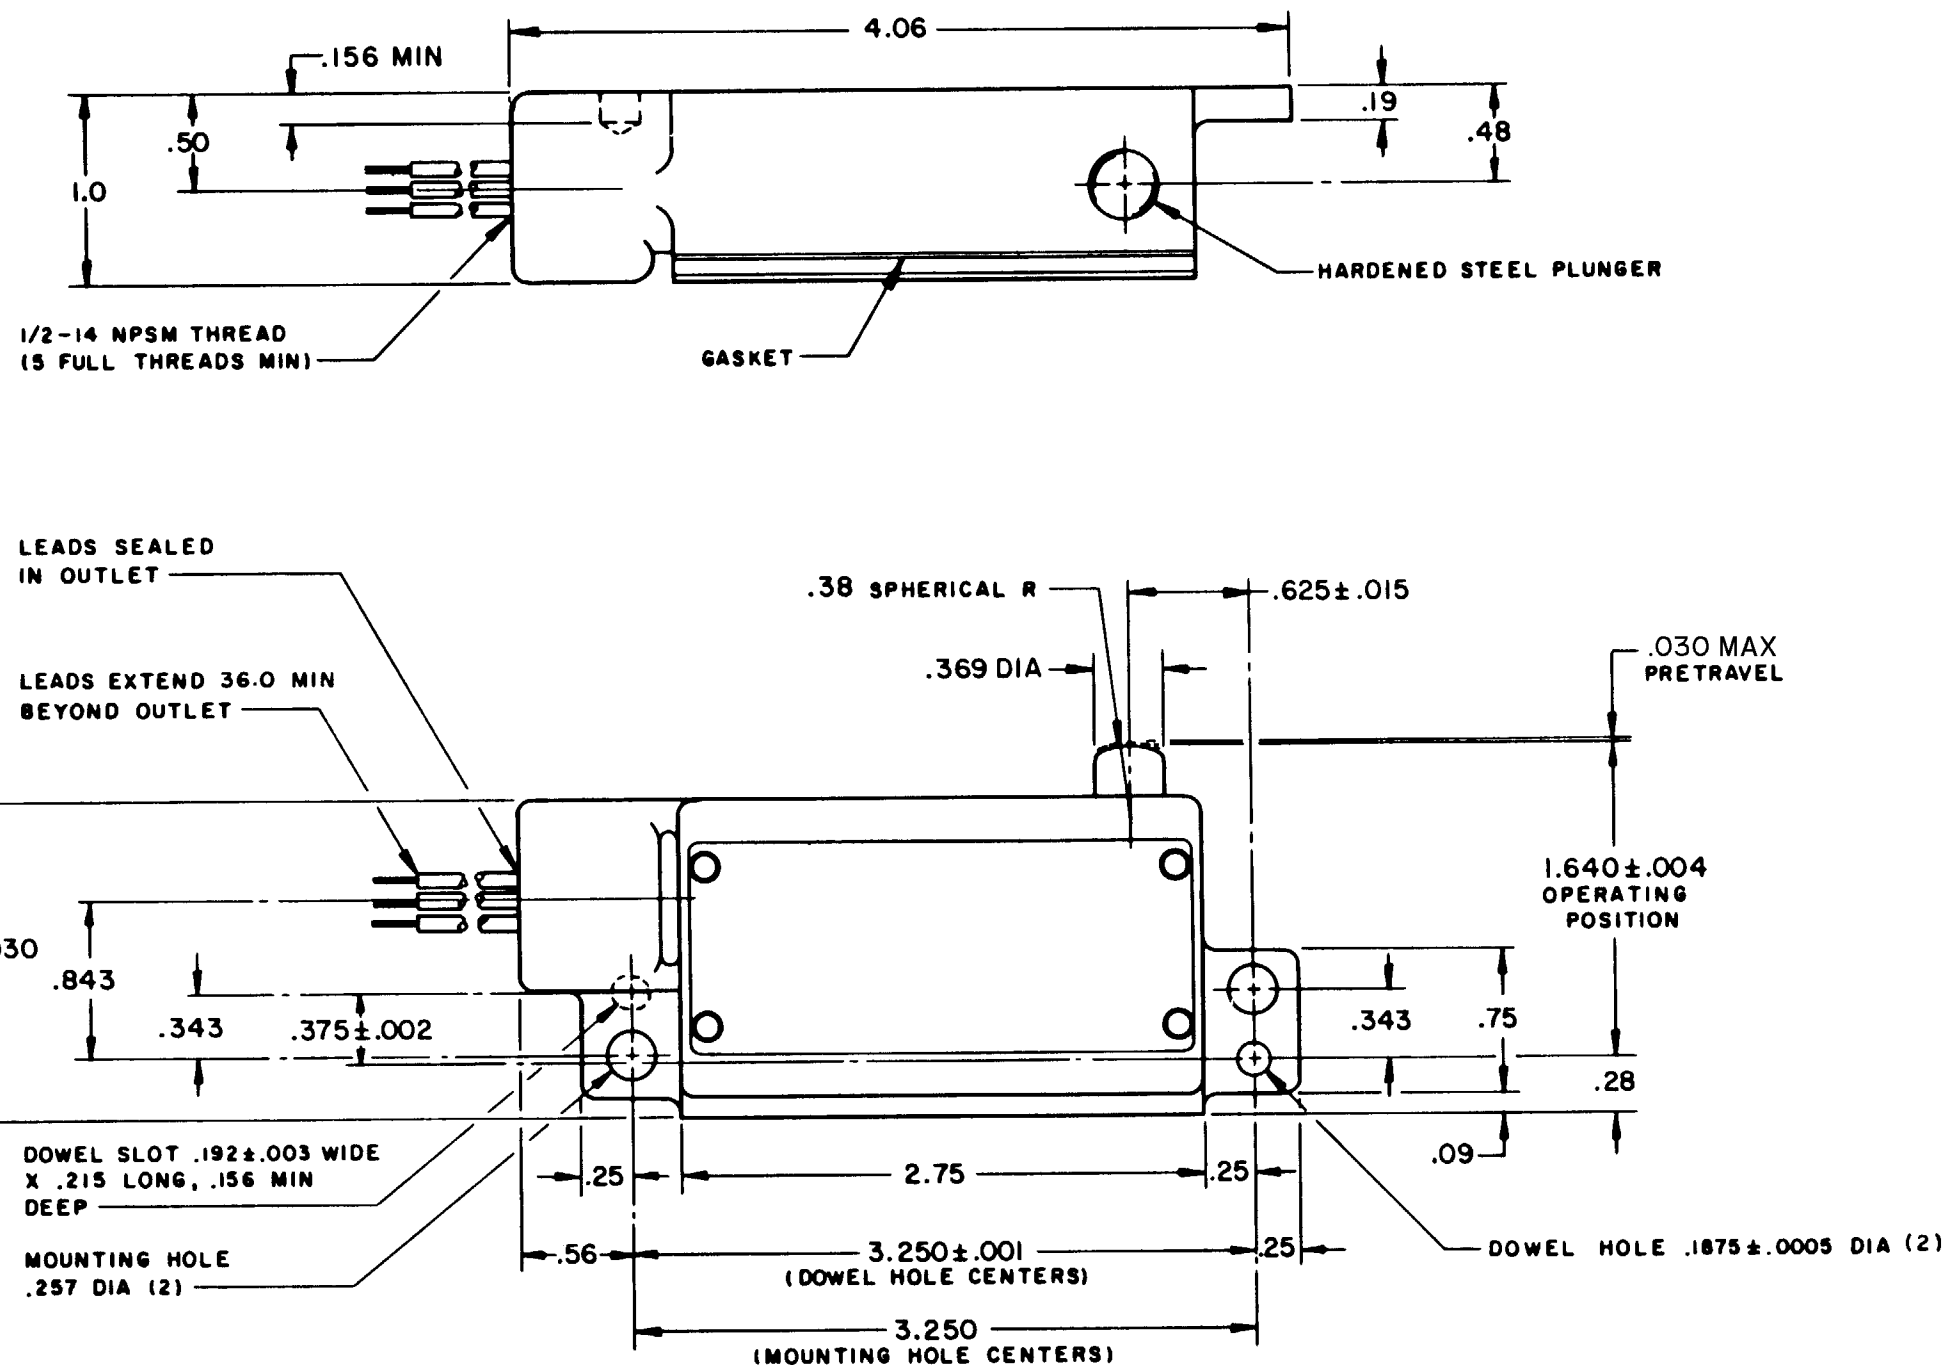

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — — 5 LB MAX

RELEASE FORCE — — — — 1 LB MIN

DIFFERENTIAL TRAVEL — — — .004 MAX

OVERTRAVEL — — — — .203 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

- L96- 15 A - 125, 250, OR 480 VAC
1/2 A - 125 VDC; 1/4 A - 250 VDC
1/8 HP - 125 VAC; 1/4 HP - 250 VAC

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±

WEIGHT .720 LB PLUS LEADS

WIRING CONNECTIONS—
COMMON - BLACK LEAD
NORMALLY OPEN - BLUE LEAD
NORMALLY CLOSED - RED LEAD