



HONEYWELL
PART NUMBER
BZV6-2RN-S

REV	DOCUMENT	CHANGED BY	CHECK
5	0081896	NMN 21SEP11	CMH

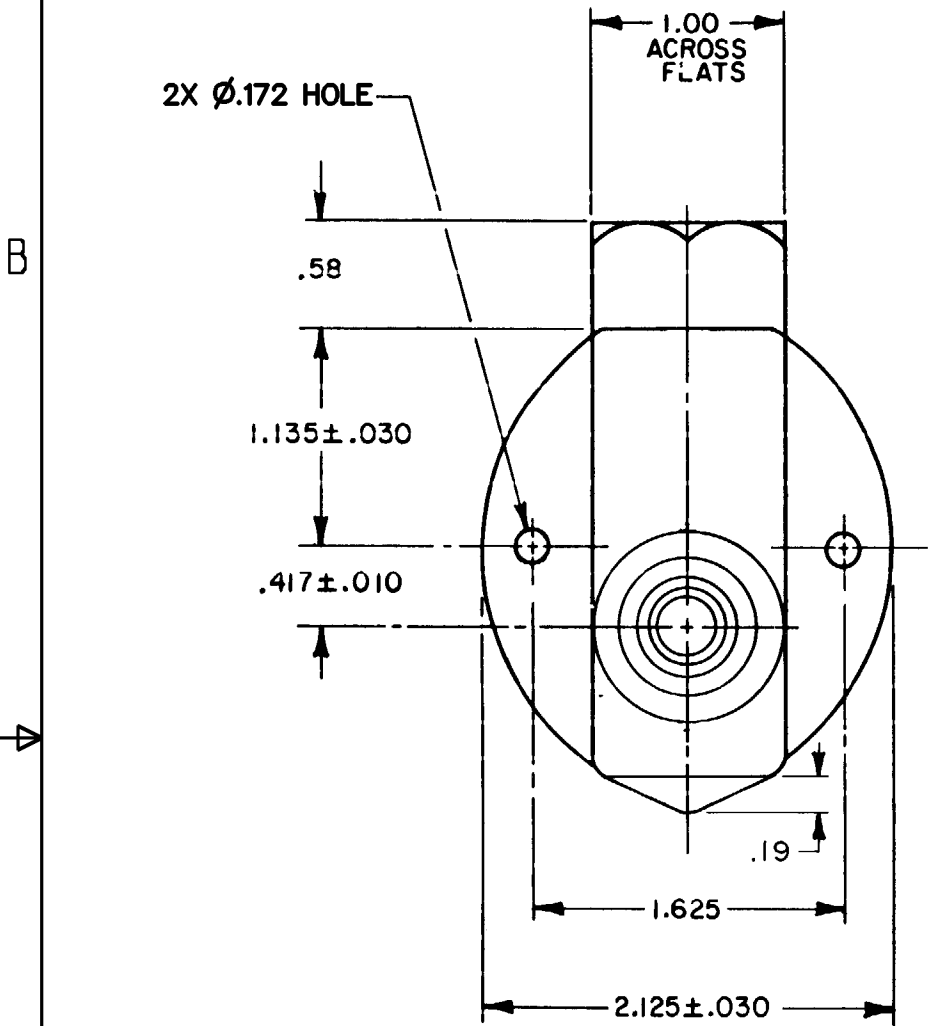


ELASTOMER PLUNGER SEAL SECURED TO COMPONENTS BY EXTERNAL BANDING

HARDENED STEEL PLUNGER

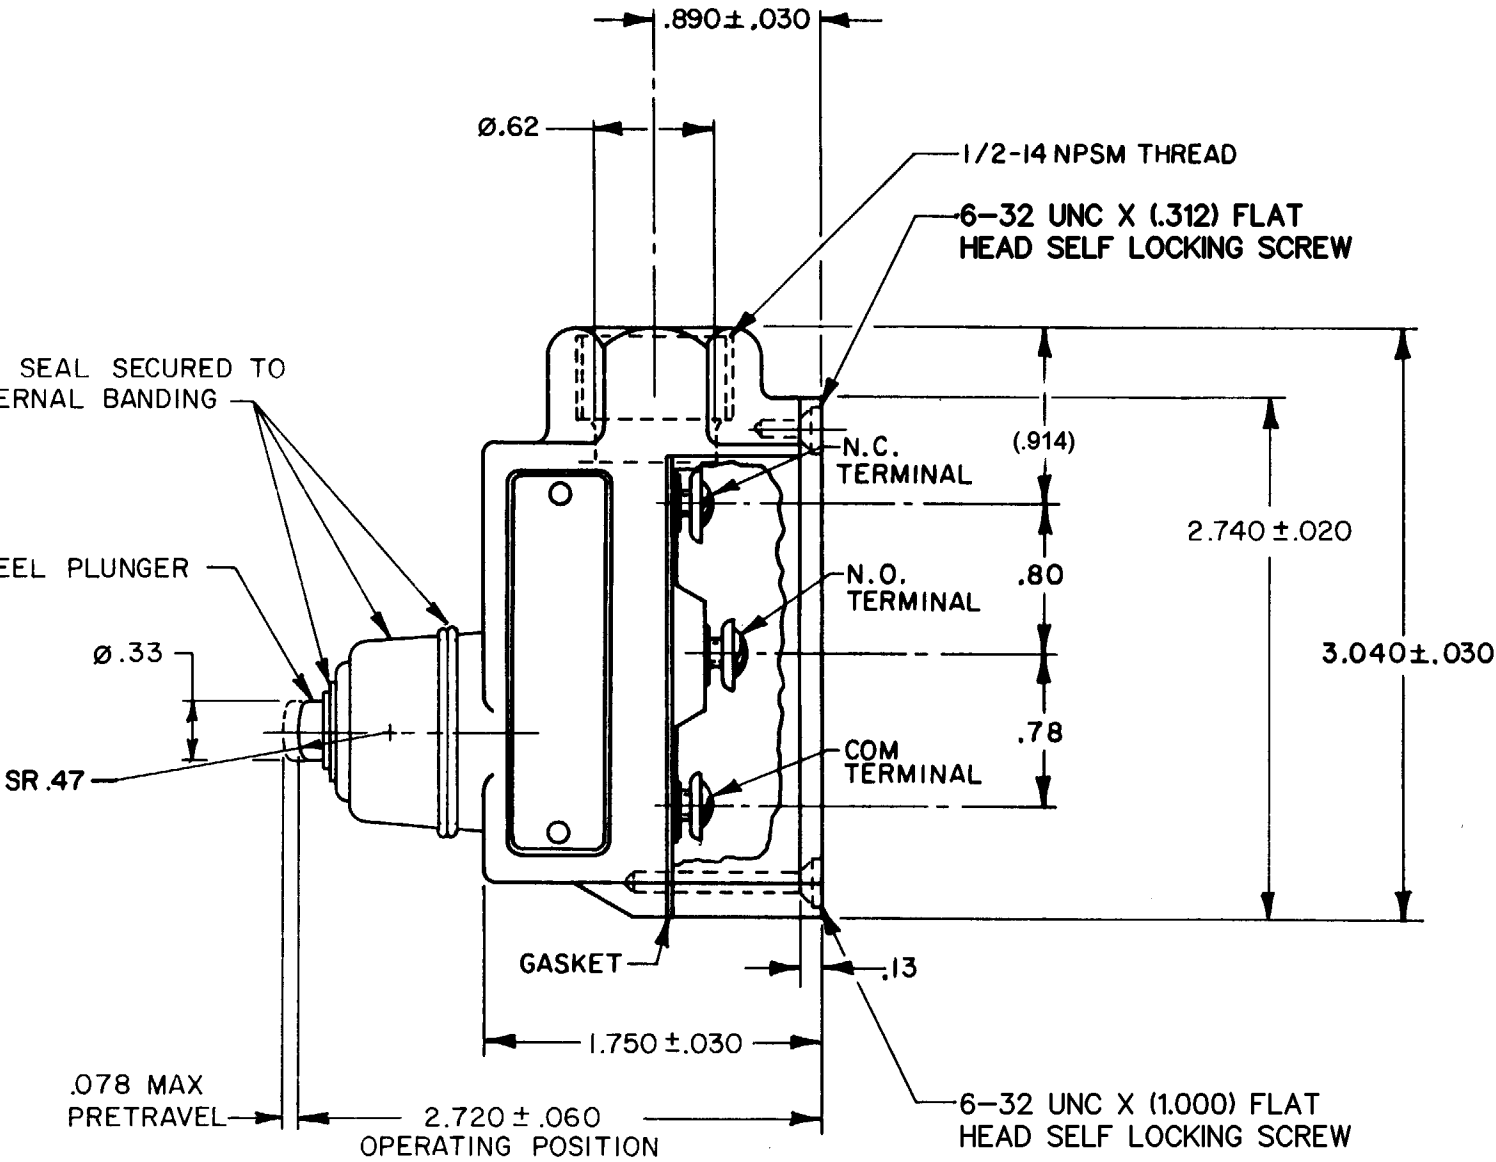

- NOTES
- 1 - 3X 6 - 32 UNC X (.219) TERMINAL SCREW AND CUP WASHER
 - 2 - SEALED FOR NEMA 1, 3, 4 AND IP 66 RATING

RELEASE NO: PR - 14307

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: INCH TOLERANCES UNLESS NOTED:		DRAWN		MAM		05NOV85		Honeywell							
		CONTACT ARRANGEMENT				CHECK		GCH		08NOV85							TITLE SWITCH - ENCLOSED		
OPERATING FORCE----- 9-24 OZ		S P D T		NO PLACES X ± .030		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.					SIZE TYPE CAGE CODE DRAWING NAME REV B I - BZV6-2RN-S 5								
RELEASE FORCE----- 4 OZ MIN		-L74- 15A-125, 250 OR 480 VAC,2A-600 VAC 1/8 HP - 125 VAC; 1/4 HP - 250 VAC 1/2A - 125 VDC; 1/4A-250 VDC		ONE PLACE .X ± .015															
DIFFERENTIAL TRAVEL----- .002 MAX				TWO PLACE .XX ± .005															
OVERTRAVEL----- .219 MIN				THREE PLACE .XXX ± 0°															
SWITC-BASIC REPLACEMENT----- BZ-2RQ77				ANGLES X ±															
		CE 1.5A, 240VAC		THIRD ANGLE PROJECTION		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY													
						RASTER					SCALE NONE WEIGHT .62 LB SHEET 1 OF 1								